

TM-0009

CARABINER D ALUMINUM TRIPLE LOCK 25KN KEYLOCK CE EN NBR WITH PULLEY AND EYE MASTER D TRIPLE EYE PULLEY



Automatic closing system (triple), Made of aluminum, type B and with a Keylock model lock resistance of 25KN





Pulley with 4kN bearing and 25kN eye Thickness 11mm, opening 19mm, with 18mm diameter height 166mm and width 73mm





3 in 1 - carabiner set with pulley and eyelet can be used for various In accordance with CE 0321, EN 362, EN 12275, EN 12278 e NBR 15837 operations







Description

MASTER D TRIPLE EYE PULLEY connector or carabiner, in aluminum, symmetrical D, TASK brand, standards CE 0321, EN 362, EN 12275, EN 12278 and NBR 15837, code TM-0009, type B, weight 184g, thickness 11mm, 19mm opening, 166mm height, 73mm width, automatic closing system with triple security, Keylock model lock, resistance on the major axis of 25kN and on the minor axis of 7kN.

Used for special operations (personal and collective). The system is 3 in 1. Carabiner with 25kN resistance, pulley with sealed bearing with 4kN resistance, compatible with ropes from 5 to 13mm in diameter and eyelet with 25kN resistance and 18mm in diameter.

The carabiner set with pulley and eye is used for various operations. Example of use: lifting equipment, vertical technical rescue operations, counterweight (limited to one person), pulley blocks, stretcher balancing - Easy Balance Technical System - among others.

Pulley compatible with 5 to 13 mm ropes. Pulley diameter: 18mm. Pulley efficiency: 85%.







Keylock model lock does not screw



Automatic closing with triple security







Light and compact at just 184g



Used for special operations (personal and collective)



Built-in eyebolt with 18mm diameter and 25kN resistance



Technical Description

MASTER D TRIPLE EYE PULLEY connector or carabiner, in aluminum, symmetrical D, TASK brand, standards CE 0321, EN 362, EN 12275, EN 12278 and NBR 15837, code TM-0009, type B, weight 184g, thickness 11mm, 19mm opening, 166mm height, 73mm width, automatic closing system with triple security, Keylock model lock, resistance on the major axis of 25kN and on the minor axis of 7kN.

Used for special operations (personal and collective). The system is 3 in 1. Carabiner with 25kN resistance, pulley with sealed bearing with 4kN resistance, compatible with ropes from 5 to 13mm in diameter and eyelet with 25kN resistance and 18mm in diameter.

The carabiner set with pulley and eye is used for various operations. Example of use: lifting equipment, vertical technical rescue operations, counterweight (limited to one person), pulley blocks, stretcher balancing - Easy Balance Technical System - among others.

Pulley compatible with 5 to 13 mm ropes. Pulley diameter: 18mm. Pulley efficiency: 85%.

Technical advantages



 $Technology\,with\,more\,than\,30\,years\,used\,in\,security$



Used for special operations (personal and collective)



 $3-in-1\,system-the\,carabiner, pulley\,and\,eyelet\,set\,is\,used\,for\,various\,operations$



 $Pulley with \, 4kN \, sealed \, bearing, compatible \, with \, ropes \, from \, 5 \, to \, 13 \, mm \, in \, diameter \, ropes \, ro$



 $Built-in\,eye bolt\,with\,18 mm\,diameter\,and\,25 kN\,resistance$



Light and compact at just 184g



Automatic closing system with triple security (3 movements) and Keylock model lock, does not tangle

Certifications

EQUIPMENT

NORMATIVE

MASTER D TRIPLE EYE PULLEY


CE 0321 | EN 362 | EN 12275 | EN 12278 | NBR 15837



Gallery





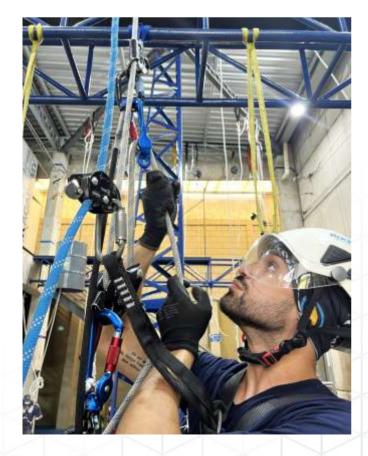





Measurements and Materials

Product name:	MASTER D TRIPLE EYE PULLEY
Product code:	TM-0009
Dimensions:	Opening: 19mm Height: 166mm Width: 73mm Thickness: 11mm
Material:	Aluminum
Weight:	184g
Lifespan:	Indefinite duration in the case of normal and appropriate use and when stored under acceptable conditions and inspected according to standards.
Warranty:	1 year against manufacturing defects. NOTE: The equipment is produced with high-tech materials, manufactured in Brazil with 100% quality and safety.

Applications

The carabiner, pulley and eyelet set is used for various operations. Examples of use: lifting equipment, vertical technical rescue operations, counterweight (limited to one person) pulley blocks, stretcher balancing - Easy Balance Technical System - among others.

Used to quickly join personal and collective equipment. Model D is for universal use, being most used in operations involving installation and anchoring.



Related Products

IZ FOUR



TC-0149 | TC-0147 | TC-0148

IZ TWO



TC-0146 | TC-0144 | TC-0145

FIVEX II



TC-0020 | TC-0018 | TC-0019

X-TREME II



TC-0031 | TC-0029 | TC-0030

X-TREME X-PERT



TC-0029XPT

X-TREME ARB



TC-0031ARB | TC-0029ARB | TC-0030ARB

FIVEX LIGHT II



TC-0109 | TC-0107 | TC-0108

RINGS DOUBLE LINK



TT-0010

DOUBLE LINK



TA-0055 | TA-0056 | TA-0057



EYE DOUBLE LINK



TA-0058 | TA-0059 | TA-0060

I-SLING



TA-0051 | TA-0052 | TA-0053

LINK



TA-0048 | TA-0049 | TA-0050

SPIN



TA-0022

EASY ROPE



TA-0123

BULLET Z AUTO



TM-0040

MASTER D AUTO



TM-0054

STR PLUS II



TX-0048 | TX-0056

H-STR PLUS II



TX-0041 | TX-0042



RESCUE SUPER II



TX-0005

SISTEMA WENDIX



TX-0047

STATIC RESCUE



TR-0025 - 40

INSERT 52



TL-0078 | TL-0079



FAQ

HOW DO I KNOW THE YEAR OF MANUFACTURE/BATCH AND TRACEABILITY NUMBER?

The equipment has tamper-proof laser engraving, with technical information and individual traceability number, being month and year (the last four numbers), following the TASK standard.

DOES THIS PRODUCT HAVE NATIONAL CERTIFICATION?

Yes. It is designed and manufactured in accordance with NBR 15837.

WHAT IS THE LIFESPAN OF THE PRODUCT?

The manufacturer informs that the lifespan of the product under normal circumstances and, depending on its proper use and stored in ideal conditions, can reach 10 years, with 5 years after its manufacture being stored, and 5 years when put into operation.

DOESTHIS PRODUCT HAVE CA?

No. CA does not apply to this product.

DOES THIS PRODUCT HAVE INTERNATIONAL CERTIFICATION?

Yes. It is designed and manufactured in accordance with CE 0321. EN 362. EN 12275 and EN 12278.

TASK VOTORANTIM
Av. Rogério Cassola, 896
Itapeva - Votorantim - SP
18116-709 - Brasil
+55 (15) 3034-8000
comercial@taskbr.com

BUY NOW!

A















