



TC-0031XPTNFPA (S) | TC-0029XPTNFPA (ML) | TC-0030XPTNFPA (XL)

X-TREME X-PERT NFPA



It has 8 anchor points, 2 of which are for shoulder rescue, extremely light and corrosion resistant



INOX buckles - exclusive AC® system - patented, double cylinder buckle



Double and high padding (23cm) which brings stabilization for the lumbar region



Exclusive intelligente FIT FIX® system, in inox for connection of the ventral blocker



2 shoulder rests for lanyard connectors, 4 material holders and 1 backpack holder



Comes with first aid bag - SOS BAG - and type D carabiner, NFPA standard



RF tapes with flame retardant treatment, ideal for professionals in the rescue and work fields



Harness in conformity with NFPA 2500 (1938), class III, ABNT NBR 15.835 and NBR 15.836:2020

Description

X-TREME X-PERT® NFPA is a parachutist-type safety harness, personal protective equipment used in a SPIQ (personal fall protection system). It has 8 connection points in noble metal materials (stainless steel and/or aluminum), 2 for fall arrest, 2 for positioning, 1 ventral, 2 for shoulder rescue and 1 for movement restriction (textile) in the lumbar region.

It has double and high padding, with 23cm in the lumbar region, designed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long-duration operations. The X-TREME X-PERT® NFPA has an exclusive, patented AC® system, with a double cylindrical bar buckle with a stainless steel angled crown on both sides. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities.

With 2 rests for lanyard connectors on the shoulders, 4 structured yellow material holders (contrasting color), facilitating the handling of equipment, and 1 backpack holder with a load capacity of 10kg each, it comes with a first aid bag – SOS BAG, TYPE D connector, NFPA standard in triple lock aluminum with resistance of 25kN, Keylock system and 25mm opening – MASTERD TRIPLE NFPA CE NBR and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

Highlights



Flame retardant straps




8 light and resistant anchor points



First aid bag - SOS BAG



2 rests for shoulder lanyard connectors

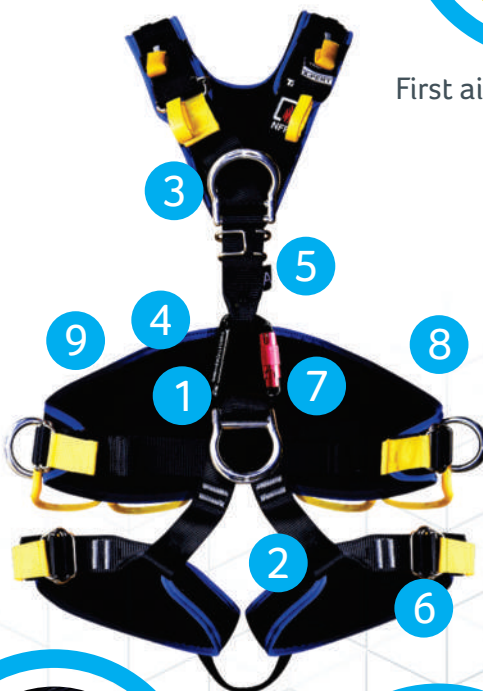

QR code for access to technical information



Double and high padding (23cm) in the lumbar region



FIT FIX® - Intelligent System in INOX for connection



Stainless steel buckles exclusive AC® system



D type carabiner, NFPA standard in aluminium with triple lock

Technical Description

X-TREME X-PERT® NFPA is a parachutist-type safety harness, personal protective equipment used in a SPIQ (personal fall protection system). It has 8 connection points in noble metal materials (stainless steel and/or aluminum), 2 for fall arrest, 2 for positioning, 1 ventral, 2 for shoulder rescue and 1 for movement restriction (textile) in the lumbar region.



It has double and high padding, with 23cm in the lumbar region, designed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long-duration operations.

The X-TREME X-PERT® NFPA has an exclusive, patented AC® system, with a double cylindrical bar buckle with a stainless steel angled crown on both sides. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities.

With 2 rests for lanyard connectors on the shoulders, 4 structured yellow material holders (contrasting color), facilitating the handling of equipment, and 1 backpack holder with a load capacity of 10kg each, it comes with a first aid bag – SOS BAG, TYPE D connector, NFPA standard in triple lock aluminum with resistance of 25kN, Keylock system and 25mm opening – MASTER D TRIPLE NFPA CE NBR and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

Its straps have flame retardant treatment and thus are suitable for use in sectors inherent to this risk such as firefighters, chemical, oil and petrochemical industries or for other professionals who are subject to this risk. In compliance with NFPA 2500 (1983), class III (Fire rescue), ABNT NBR 15835:2020 and ABNT NBR 15836:2020 standards.

Technical Advantages

-  Developed for technical rescue, rope access, evacuation, works at height and confined spaces, has a low center of gravity, ideal for such activities
-  Has 8 anchor points, extremely light and resistant to corrosion - 100%
-  Developed with double and high paddings, with 23cm in the lumbar region for perfect fit between the user and the equipment, ensuring extreme comfort and stabilization for long duration operations in suspension
-  Developed with noble metallic materials (inox steel and aluminium), has buyers satisfied with the resistance to corrosion - 100%
-  FIT FIX® system for fixation of the ventral blocker compatible with every blocker model existing in the market
-  AC® system - patented, with double cylindrical bar buckle with angled inox crown in both sides
-  AC® system doesn't have straight angles in the compression of the tapes, better durability, doesn't lose tension in the adjustment to the body even when the person walks
-  Flame retardant tapes for activities with risk at height temperatures
-  Harnesses, lanyards and fall arresters according to national and international normatives and modern tests
-  D type carabiner, NFPA standard in aluminium with triple lock and 25kN of resistance, Keylock system and 25mm opening - MASTER D TRIPLE NFPA CE NBR
-  4 material holders in yellow (contasting color) and one backpack holder
-  First aid bag - SOS BAG
-  3 sizes and innovative size identification system for people up to 150kg, TASK methodology
-  Anchor points (frontal and back) for fall arrest systems with additional "A" marking
-  QR code

Gallery





Measures and Materials

Product name:	X-TREME X-PERT® NFPA		
Product code:	TC-0031XPTNFPA (S) TC-0029XPTNFPA (ML) TC-0030XPTNFPA (XL)		
Sizes:	S	ML	XL
Legs	50-65	55-75	55-80
Lumbar	65-100	75-120	85-140
Suspender	100-125	105-130	110-135
Weight	2,530kg	2,630kg	2,730kg
Colors:	Black with blue and yellow details		
Capacity:	Users up to 150kg		
Material:	Poliester, aluminium and inox steel		
Lifespan:	Maximum duration of 10 years from the date of manufacture in the case of normal use and when stored under acceptable conditions.		
Warranty:	1 year against manufacturing defects. NOTE: The equipment is produced with high-tech materials, manufactured in Brazil with 100% quality and safety.		

Applications

X-TREME X-PERT® NFPA parachute safety harnesses are intended for personal protection systems for movement restriction, fall arrest, positioned work and work suspended on ropes, applicable for professionals who perform work at various heights, progressions on vertical structures, ideal for vertical technical rescue, rope access, evacuation, positioning and work at height, such as on fixed sailor-type ladders, roofs and access to confined spaces, and work in which there is exposure to high temperatures.

Certifications

EQUIPMENT

X-TREME X-PERT® NFPA

NORMATIVE

ABNT NBR 15835:2020

ABNT NBR 15836:2020

NFPA 2500(1983). Class III

DIN 53438-1 | DIN 53438-2 | DIN 53438-3

CA

38495

MASTER D TRIPLE

NFPA 2500(1983) ED.22

ABNT NBR 15837:2020

CE

Related Products

QUICK UP




TB-0005

TRIANGLE



TM-0020

REACTOR 55

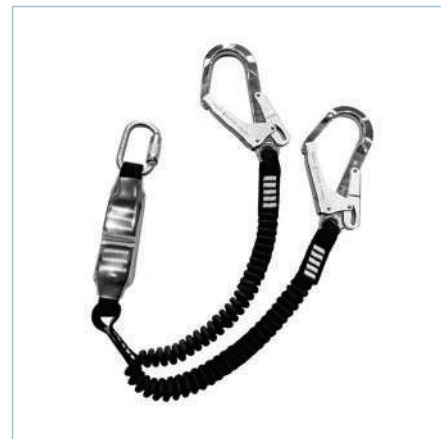

TC-0022

REACTOR 110



TC-0026

TAIL 5 H



TC-0027

SITE



TC-0024

LUCK



TB-0020

LUCK RESCUE



TB-0020A

STEEL



TB-0012

RELOCK 10



TB-0029

FAQ

WHAT ARE THE BENEFITS OF A HIGH AND DOUBLE PADDING IN THE LUMBAR?

The double padding with 23cm height in the lumbar region helps in the stabilization and distributes evenly the compression during use. Extreme comfort regardless of the size of the user. The X-TREME X-PERT NFPA® harness is ideal for users who seek extra comfort.

IN WHAT TYPE OF ACTIVITIES CAN I USE THE X-TREME X-PERT® NFPA?

The X-TREME X-PERT NFPA® is ideal for technical rescue works, rope access, evacuation, positioning, work at height and confined spaces, because it has a low centre of gravity.

CAN I USE THE X-TREME X-PERT® NFPA IN WORKS WITH RISK OF FLAMES?

Yes, the X-TREME X-PERT NFPA® has tapes with flame retardant treatment to avoid harness combustion according to normatives DIN 53438-1 | DIN 53438-2 | DIN 53438-3, its properties are maintained during 3 years.

IN CASE OF A FALL WITH THE HARNESS, WHAT SHOULD I DO?

According to NR 35 - 35.6.6.5 the PPEs, accessories and anchor systems that present defects, degradation, deformations or suffer fall impacts should be inutilized and discarded, except when its restoring is expected in national technical normatives, or, in its absence, international normatives.

HOW TO I KNOW THE YEAR OF MANUFACTURING AND TRACEABILITY NO.?

The traceability label on the harnesses follows the TASK standard: individual no., month and year (the last four numbers).

WHERE IS THE QR CODE OF THE HARNESS?

The QR code of the X-TREME X-PERT NFPA® harness is located in the tag in the internal part of the lumbar.

DOES THIS HARNESS HAVE CA?

Yes, X-TREME X-PERT NFPA® has CA 38495. Issued in 2023.

WHAT IS THE LIFESPAN OF THE HARNESS?

The manufacturer informs that the duration of the X-TREME X-PERT NFPA® harness under normal circumstances and according to its proper use and stored in ideal conditions can reach 10 years, 5 years after its manufacture keeping it in storage and 5 years when put into operation.

WHAT ARE THE TYPES OF CONNECTIONS OFFERED BY THE X-TREME X-PERT® NFPA?

The X-TREME X-PERT NFPA® harness has 6 connection points (clutch points) for sliding rope fall arrester or steel cable (chest point), retractile fall arrester (lateral points), positioning lanyards (lateral points) and descenders or cow's tails (ventral point) and 1 point for lumbar restriction.

WHAT IS THE MODEL, FUNCTION AND CERTIFICATION OF THE CARABINER THAT COMES WITH THE X-TREME X-PERT® NFPA?

The X-TREME X-PERT NFPA® harness comes with an aluminum connector with triple lock, with Keylock system, 25mm opening. Following NFPA, CE, EN certification standards and NBR national certification.

HOW MANY AND WHAT ARE THE REGULATION POINTS OF THE X-TREME X-PERT® NFPA?

The X-TREME X-PERT NFPA® has 8 stainless steel buckles for adjusting the waist (2), legs (2), adjusting the height of the legs (2), chest (1), back (1) and one (1) buckle for attaching a strap to the lower back.

IS THE X-TREME X-PERT® COMPATIBLE WITH THE SAME EQUIPMENT THAT WERE UTILIZED WITH X-TREME AND X-TREME II. SUCH AS FALL ARRESTERS, LANYARDS, ASCENDERS AND DESCENDERS?

Yes. Any model of sliding or retractable lifeline and fall arrester, restraint or positioning lanyard can be used, as long as it is manufactured by TASK, for reasons of CA compatibility. For the use of ascenders and descenders, the X-TREME X-PERT NFPA® is compatible with any model of this equipment, regardless of its manufacturer.

IS IT COMPATIBLE WITH ANY NATIONAL STANDARD?

Yes, the X-TREME X-PERT NFPA® harness is compliant with EN 358:2000, EN 361:2002 and NFPA 2500 (1983) ED 22 standards.

WHICH CARABINER SHOULD I USE WITH THE CHEST BLOCKER?

The recommended one for use with the chest blocker is the 10mm TRIANGLE quick mesh connector (TM-0020).

WHICH CARABINER SHOULD I USE WITH THE CHEST BLOCKER?

The indicated for the use of the chest blocker is the fast mesh TRIANGLE 10mm (TM-0020).

FAST MESH AND CHEST BLOCKER COME WITH THE X-TREME X-PERT® NFPA HARNESS?

Não, these equipments are sold separately.

HOW TO MEASURE HARNESS SIZE?


The harness size must be checked as follows:

SPOT	MINIMUM-MAXIMUM	METHOD
Legs	Minimum	Pull the tape to close the diameter of the leg. The buckle tip must remain 1cm from the beginning of the double bar.
	Maximum	Pull the tape to open the diameter of the leg. The buckle tip must remain 1cm from the beginning of the double bar.
Waist	Minimum	Pull the tape to close the waist diameter. The buckle tip must remain 3cm from the beginning of the ventral connection.
	Maximum	Pull the tape to open the waist diameter. The buckle tip must remain 1cm from the beginning of the double bar.
Suspender	Minimum --	The adjustment must be made so that the ring back is centered between the armpits and shoulders.

A = Cintura

B = Pernas

C = Suspensório

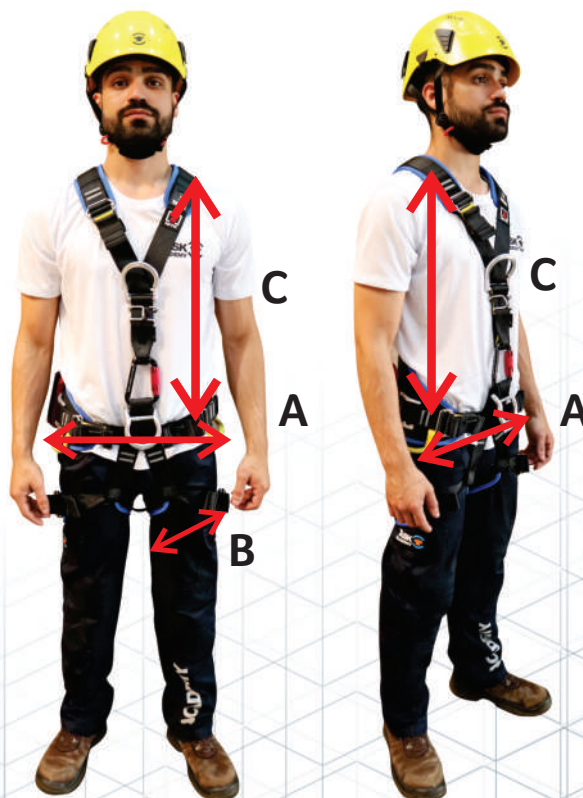

TASK VOTORANTIM
Av. Rogério Cassola, 896
Itapeva - Votorantim - SP
18116-709 - Brasil
+55 (15) 3034-8000
comercial@taskbr.com

BUY NOW!

ACCESS OUR SITE

