



TASK 

C A T A L O G 2 0 2 5

PRODUCTS

Inspiring people and saving lives!



TASK, with all its know-how acquired over the years, has also become a world reference in the production of equipment.

It is in this area that it stands out, due to its constant search for the highest quality and development of products that make work that poses risks to workers safer and more effective.

We provide a complete line of equipment, aimed at guaranteeing solutions for work at heights, confined spaces, rescues and rope access, which can certainly meet your needs.

Contact us if you are looking for reliable solutions! From the first stage of production of our products, the raw materials are inspected, one by one, by those responsible. The finished products also undergo a final quality control to ensure that nothing is out of specification.



TASK has its quality management system certified in accordance with the requirements of ABNT NBR ISO 9001, by the Certification Body TÜV NORD Brazil Quality Assessments Eireli.

TASK SÃO PAULO

Av. Rogério Cassola, 896
Votorantim - SP - Brasil
+55 (15) 3034-8000

TASK RIO GRANDE DO NORTE

Rua Monsenhor Walfredo Gurgel,
S/Nº, Parnamirim - RN - Brasil
+55 (84) 3302-2745





SUMMARY

PRODUCTS

SAFETY HARNESESSES.....	04
LANYARDS.....	16
FALL ARREST.....	20
ANCHORAGE.....	23
CONECTORS.....	34
RESCUE STRETCHERS.....	38
TRIPODS.....	43
PRE ENGINEERING SYSTEM.....	47
PULLEYS.....	52
ROPES.....	56
MANUAL DESCENDERS.....	61
ASCENDERS AND LOCKERS.....	64
AUTOMATIC DESCENDERS.....	66
BACKPACKS.....	69
HEADLAMPS.....	71
HELMETS.....	74
GLOVES.....	78
ACCESSORIES AND COMPONENTS.....	80
TREE CLIMBING.....	84
KITS.....	91

THE COMPANY

ABOUT US.....	99
---------------	----

TRAININGS

ABOUT.....	102
------------	-----

SERVICES

ABOUT.....	105
------------	-----

SAFETY HARNESSSES



SAFETY HARNESSSES

SAFETY HARNESSES



FIVEX LIGHT II

TC-0109 (S) | TC-0107 (ML) | TC-0108 (XL)

CA: 48303

Capacity: 150kg

Weight: S - 2,200kg | ML - 2,300kg | XL - 2,400kg

8 stainless steel adjustment buckles

Double padding provides comfort

FIT FIX® for ventral blocker connection

Connector with Keylocksystem

Exclusive DOUBLE LINK® textile coupling system

Backpack holder with 20kg capacity

4 material holders with a capacity of 10kg each



VISIT THE WEBSITE

With 6 extremely light anchor points, including 2 DOUBLE LINK® textile points for fall arrest (A1/Dorsal and A2/Chest), 2 DOUBLE LINK® textile points in the lumbar region for positioning during lateral work, 1 ventral aluminum suspension point and 1 structured textile ring point for lumbar (back) restriction. It has stainless steel buckles – exclusive AC® system. It is patented and has a double cylindrical bar buckle with an angled stainless steel crown. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, 1 central backpack holder, carabiner and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

SAFETY HARNESSSES



FIVEX II

TC-0020 (S) | TC-0018 (ML) | TC-0019 (XL)

CA: 36402

Capacity: 150kg

Weight: S – 2,300kg | ML – 2,400kg | XL – 2,500kg



With 6 connection points in noble metal material (stainless steel and/or aluminum), 2 for fall arrest, 2 for positioning, 1 ventral and 1 for movement restriction (textile). It has stainless steel buckles – Exclusive AC® system. It is patented, has a double cylindrical bar buckle with an angled stainless steel crown. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, 1 central backpack holder, carabiner with Keylock system and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

SAFETY HARNESS FIVEX II® - QUICK UP

TC-0020A (S) | TC-0018A (ML) | TC-0019A (XL)

Kit with FIVEX II®, QUICK UP ventral blocker, made of high-resistance aluminum, and TRIANGLE threaded connector, made of steel.

SAFETY HARNESSSES



X-TREME II

TC-0031 (S) | TC-0029 (ML) | TC-0030 (XL)

CA: 38495

Capacity: 150kg

Weight: S - 2,400kg | ML - 2,500kg | XL - 2,600kg



With 6 connection points, 2 for fall arrest (in aluminum), 2 for positioning (in aluminum), 1 ventral (in aluminum) and 1 for movement restriction (textile). The double and high padding, with 23 cm in the lumbar region, was developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long-term operations in suspension. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces. With 4 structured yellow material holders, 1 central backpack holder, carabiner with Keylock system and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

SAFETY HARNESS X-TREME II® - QUICK UP

TC-0031A (S) | TC-0029A (ML) | TC-0030A (XL)

Kit with X-TREME II®, QUICK UP ventral blocker, made of high-resistance aluminum, and TRIANGLE threaded connector, made of steel.




X-TREME X-PERT

TC-0031XPT (S) | TC-0029XPT (ML) | TC-0130XPT (XL)

CA: 38495

Capacity: 150kg

Weight: S – 2,530kg | ML – 2,630kg | XL – 2,730kg

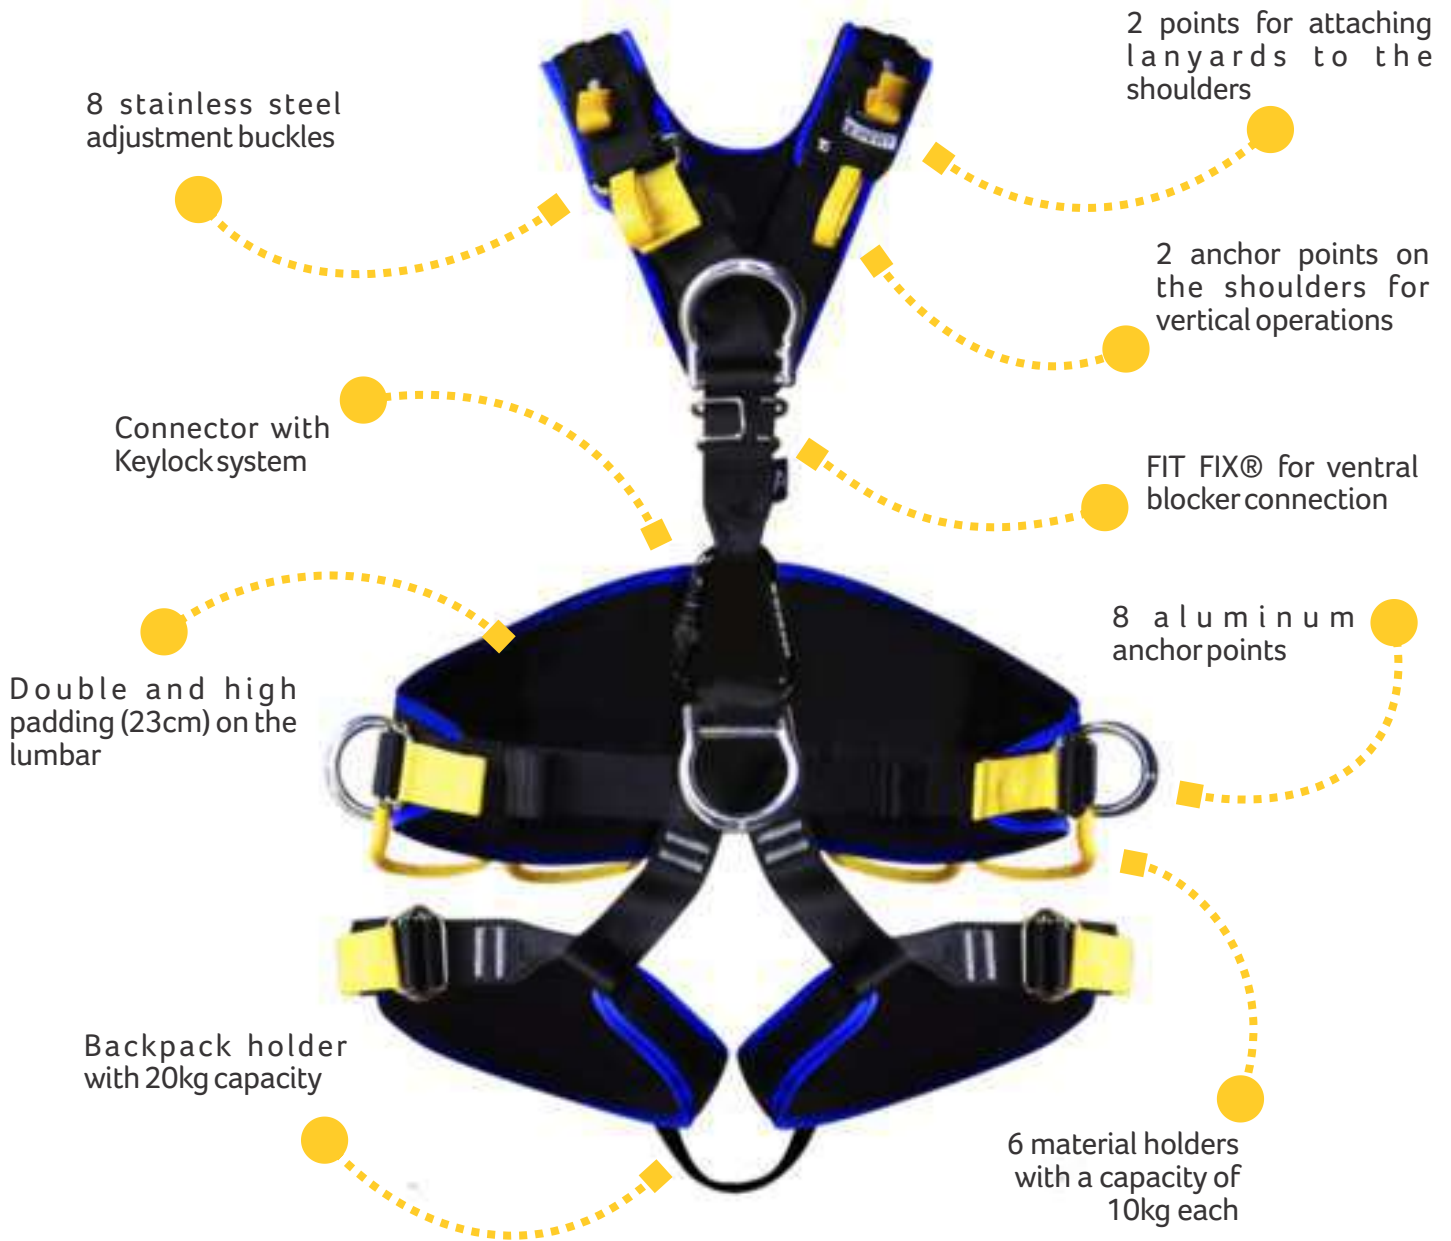

With 8 connection points in noble metal materials (stainless steel and/or aluminum), 2 for fall arrest, 2 for positioning, 1 ventral, 2 for shoulder rescue and 1 for displacement restriction (textile). It has double and high padding, with 23cm in the lumbar region, they were developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long operations. With exclusive, patented AC® system, it has a double cylindrical bar buckle with angled stainless steel crown, on both sides. Ideal for technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities. With 6 structured yellow material holders, 2 for attaching lanyards to the shoulders, 1 central backpack holder, carabiner with Keylock system and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

SAFETY HARNESSSES



X-TREME ARB

TC-0031ARB | TC-0029ARB | TC-0030ARB

CA: 38495

Capacity: 150kg

Weight: S - 2,600kg | ML - 2,700kg | XL - 2,800kg



With 7 connection points in noble metal materials (stainless steel and/or aluminum), being 1 circular aluminum ring (bridge), 2 for fall arrest, 2 for positioning, 1 ventral and 1 for movement restriction (textile). It has double and high padding, with 23 cm in the lumbar region. It was developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long operations. It has an exclusive AC® system, patented, double cylindrical bar buckle, with stainless steel angled crown, on both sides. Specially developed for vertical operations in trees, as well as technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, 1 central backpack holder, carabiner with Keylock system and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.

SAFETY HARNESSSES




X-TREME ARB SIT

TC-0143ARB | TC-0141ARB | TC-0142ARB

Capacity: 150kg

Weight: S - 1,800kg | ML - 1,900kg | XL - 2,000kg

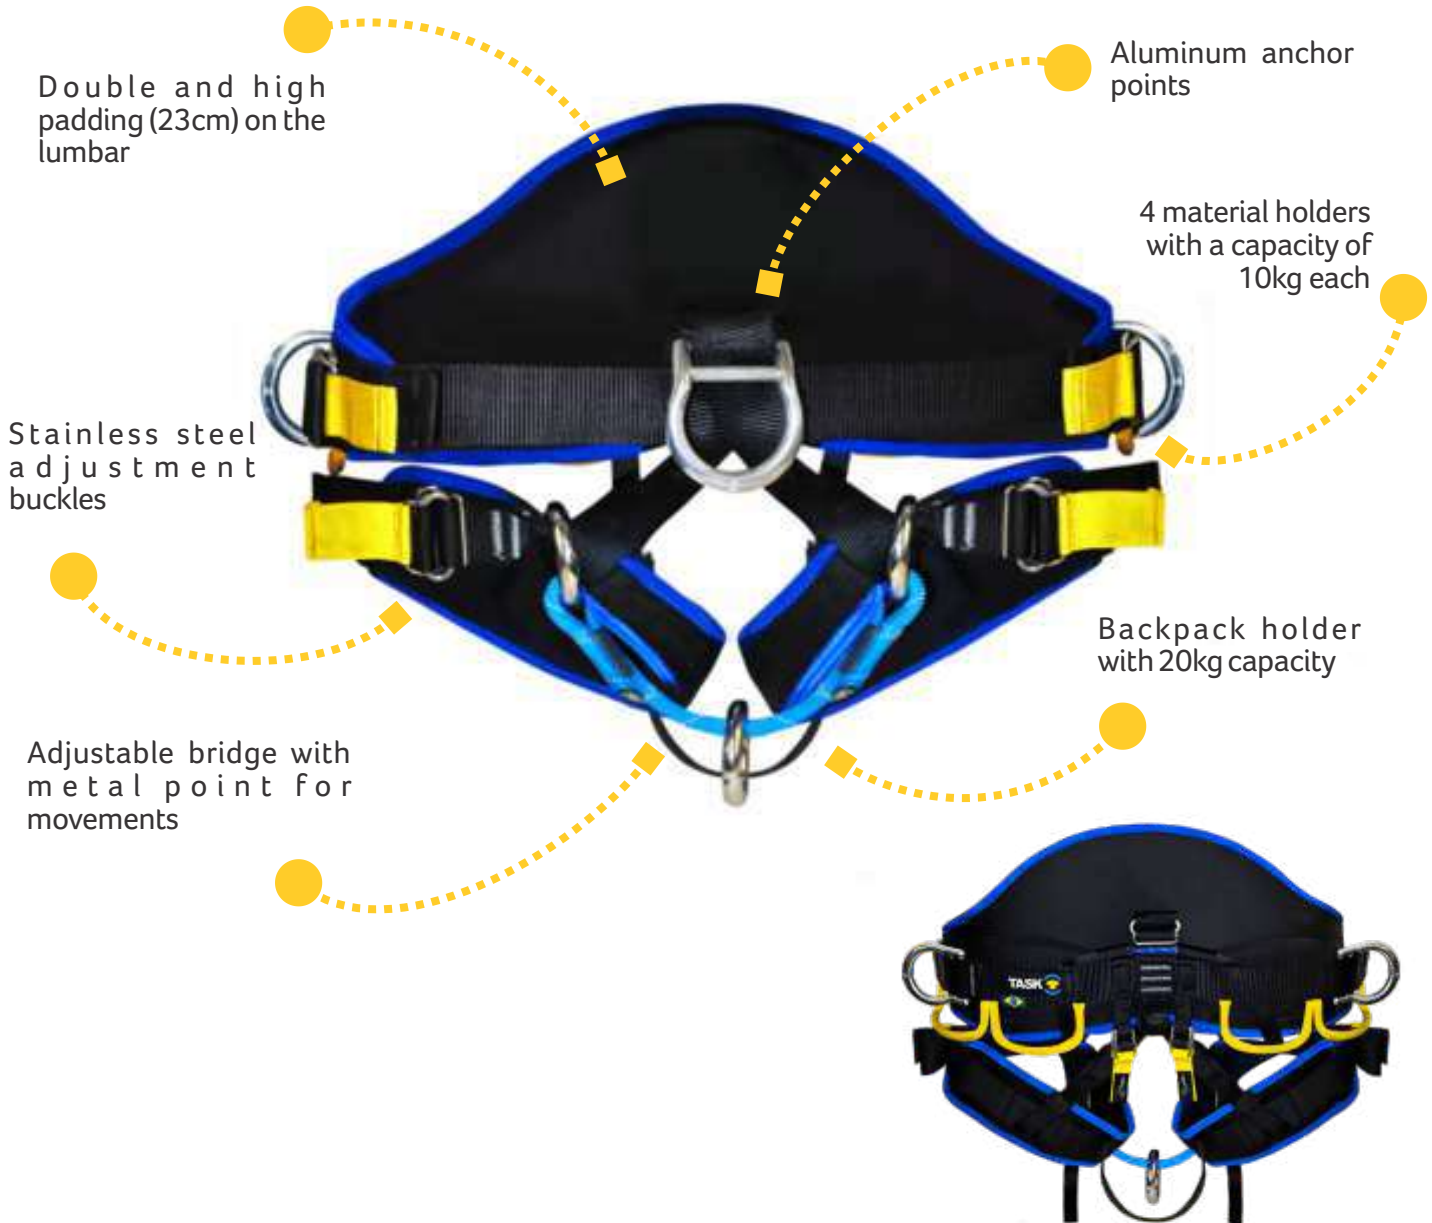

Safety harness specially developed for tree climbing operations, with 5 anchor points, extremely light and 100% corrosion resistant, including 1 circular aluminum ring (bridge), 2 metal positioning rings, 1 metal suspension ring and 1 textile movement restriction ring. It has double and high padding, with 23 cm in the lumbar region. It was developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long-lasting operations. It has an innovative and exclusive AC® system – patented –, double cylindrical bar buckle, with stainless steel angled crown, on both sides. Specially developed for vertical tree operations, as well as technical rescue, rope access, evacuation, positioning, work at height and confined spaces. It has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, with a load capacity of 10kg each.

SAFETY HARNESSSES




X-TREME SIT

TC-0143 (S) | TC-0141 (ML) | TC-0142 (XL)

Capacity: 150kg

Weight: S – 1,380kg | ML – 1,520kg | XL – 1,640kg

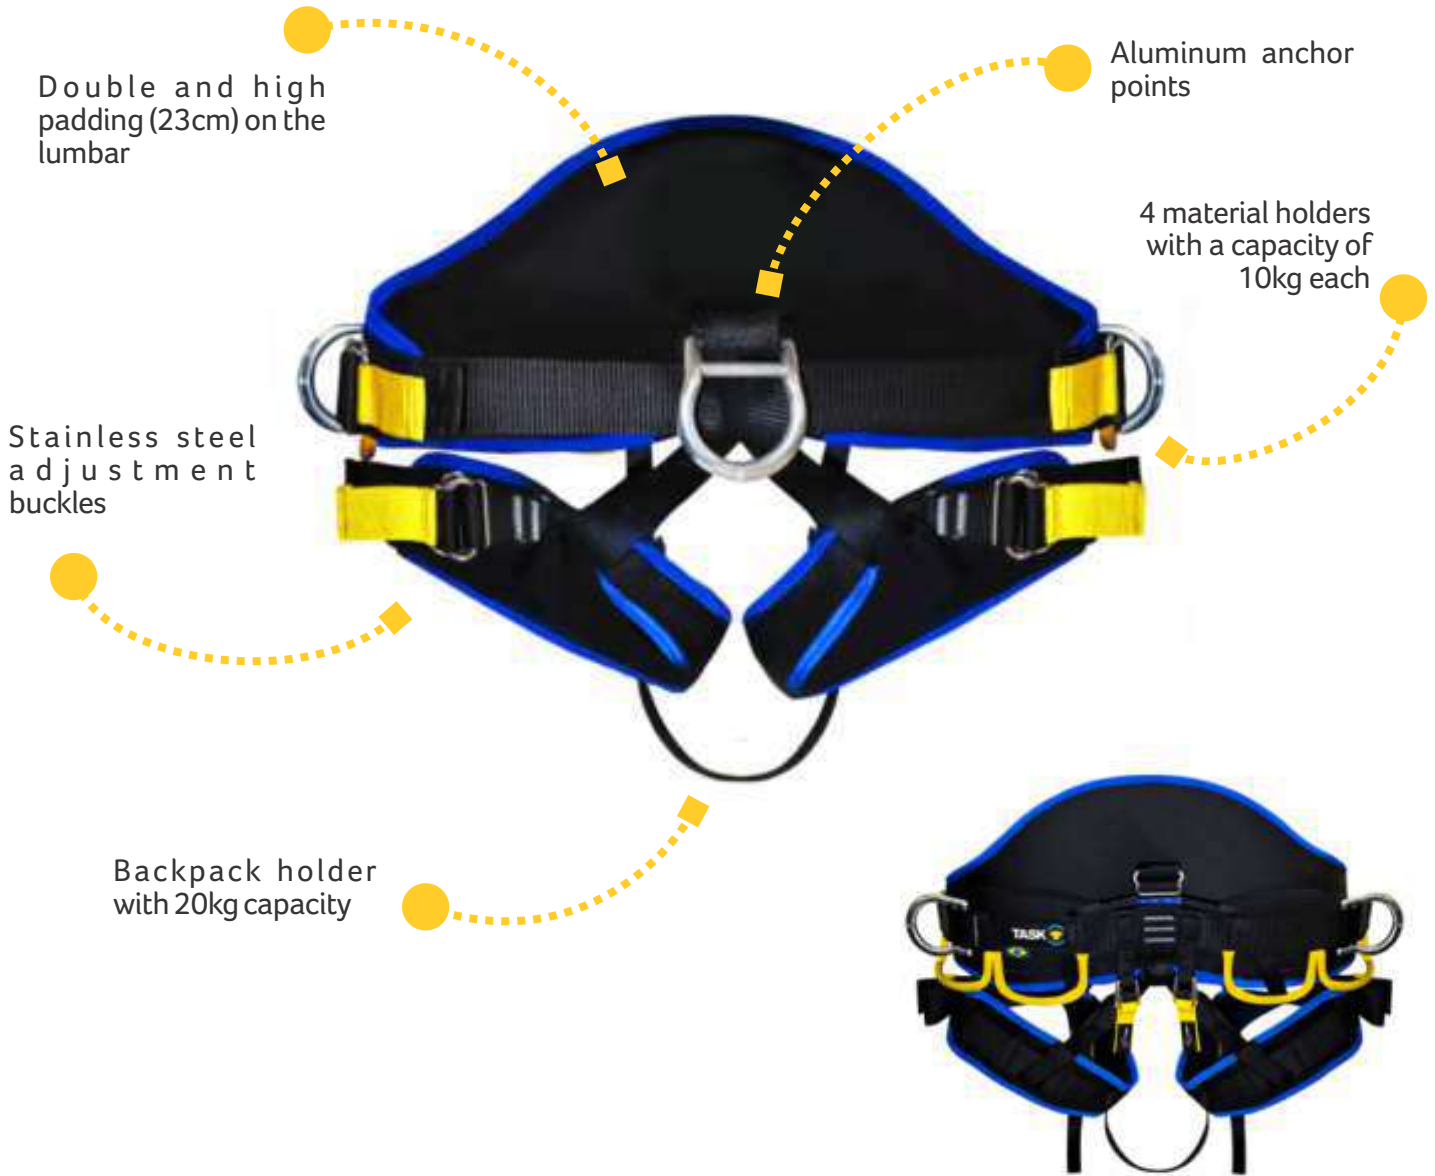

Abdominal belt (EPI) with 4 connection points, 2 lateral for positioning, 1 ventral stainless steel for suspension, restriction and movement and 1 lumbar textile point for intervention/restriction. It has double padding and 23cm high in the lumbar region. The 4 incorporated material ports are structured and have a load capacity of 10kg each. It has 6 stainless steel buckles for adjusting the lumbar region, legs and leg height, and 1 backpack port between the legs to facilitate activity in situations of vertical movement on sailor-type ladders or suspension.

SAFETY HARNESSSES



VENTRAX

TC-0103 (S/ML) | TC-0104 (XL)

Capacity: 150kg

Weight: ML/S - 520g | XL - 520g



VENTRAX® is a type safety harness that is easily adjusted using stainless steel buckles, allowing for waist and leg adjustment. Its electronically sewn straps are made of high-strength polyester with the ideal width, and are recommended for use by men and women in sports activities such as climbing. It is used by firefighters in rescue or self-rescue operations due to its lightness and quick adjustment. It has an anchor point in a textile structure, with a distinctive color, which allows for quick visibility, and includes a material holder on the side with a capacity of 5 kg. VENTRAX® is developed with high-quality materials, a resistant and ergonomic product. In compliance with EN 12277 standard.

SAFETY HARNESSSES



IZ FOUR

TC-0149 (S) | TC-0147 (ML) | TC-0148 (XL)

CA: 48235

Capacity: 150kg

Weight: S - 1,360kg | ML - 1,460kg | XL - 1,560kg

2 points for rescue on shoulders

2 material holders for fitting MGO hooks

AC® System - stainless steel buckles with crown

4 DOUBLE LINK® connection points

Double padded for extra comfort in suspension

Filled ribbons - TASK patent

3 reinforced material holders in contrasting color

Safety harness with 4 connection points and 2 rescue points on the shoulders, ideal for work at height, positioning and confined spaces, with dorsal and chest connection (SPIQ), 2 for fall arrest and 2 for positioning textiles DOUBLE LINK®. ABNTNBR 15835/2022 15836/2022

SAFETY HARNESSSES



IZ TWO

TC-0146 (S) | TC-0144 (ML) | TC-0145 (XL)

CA: 48236

Capacity: 150kg

Weight: S - 1,140kg | ML - 1,200kg | XL - 1,320kg

2 points for rescue on shoulders

2 material holders for fitting MGO hooks

AC® System - stainless steel buckles with crown

2 DOUBLE LINK® connection points



Filled ribbons - TASK patent

3 reinforced material holders in contrasting color



Safety harness with 2 connection points and 2 rescue points on the shoulders, ideal for work at height and confined spaces with dorsal and chest connection (SPIQ), including 2 DOUBLE LINK® textile fall arrest points. ABNT NBR 15835/2022 15836/2022

SAFETY HARNESSSES



TACTICAL BELT AK 47

TC-0160 (G) | TC-0161 (M)

CA: 48236

Capacity: 150kg

Peso: S – 1,140kg | ML – 1,200kg | XL – 1,320kg

Personal belt with automatic buckles for rapid vertical operations (tactical or emergency descents) without leg straps. 1 anchor point. Serial number on the buckle.

Resistance: 18kN

Weight: G - 0.248kg | M - 0.240kg



LANYARDS



LANYARDS



TC-0022

REACTOR 55

“Y” safety lanyard, made of tape, with energy absorber. With three connectors, two 55mm MGOs with double lock (23kN) and one oval steel with automatic lock and Keylock system (25kN).

Tape resistance: 22kN

Length: 1.40m

Weight: 1.50kg



TC-0026

REACTOR 110

“Y” safety lanyard, made of tape, with energy absorber. With three connectors, two 110mm MGOs with double lock (23kN) and one oval steel with automatic lock and Keylock system (25kN).

Length: 1.40m

Tape resistance: 22kN

Weight: 2.5kg



TC-0024

SITE

Lanyard made with 12mm semi-static rope, with tubular tape protection. Comes with two steel carabiners with automatic locking and Keylock system. Has a mechanical control and adjustment system.

Resistance: 42kN

Total length: 2.00m

Weight: 900g



TC-0028

TAIL 5 RGH

Positioning lanyard with 5m length, 11mm diameter and 40.5kN resistance, rope produced in Europe. Comes with hook carabiner and fixed ROPE GRAB blocker. With sewn-in eyes, compact and designed to promote a comfortable fit. It has protection on the seams and ends, signaling system (serial number) that allows better traceability and inspection. Its composition is 100% polyamide. The cover is braided with its twisted core, thus improving attributes such as abrasion, resistance, absorption and elasticity.

TC-0027

TAIL 5 H

Positioning lanyard with 5m length, 11mm diameter and 40.5kN resistance, rope produced in Europe. Includes carabiner hook.

TC-0021

TAIL 5

5m long positioning lanyard, 11mm in diameter and 40.5kN resistance. Rope produced in Europe.



TC-0117

REACTOR 55 + REACTOR 200

“Y” safety lanyard, made of tape, with energy absorber. With three connectors, two 110 mm MGOs with double lock (23kN) and one oval in steel with automatic lock and Keylocks system (25kN).

Length: 1.40m

Tape resistance: 22kN

Weight: 2.5kg



TC-0118

REACTOR 200

Lanyard attachment extender, made of 25mm wide flat polyester tape, with a protective layer of tubular tape. Comes with a 10mm TRIANGLE (35kN) for connection to the lanyard with MGO opening of 55mm.

Resistance: 22kN

Length: 0.60m

Unit weight: 250g

TC-0009 (White)

TC-0011 (Black)

ACCESS V



Asymmetrical V-shaped anchor rope made of 10.5mm semi-static rope. Used for work or rescues at heights.

Rope resistance: 29kN

Dimensions: 25cm x 65cm

Weight: 150g

TC-0010 (Black)

TC-0013 (White)

ACCESS I




Symmetrical I-shaped anchor rope made of 10.5mm semi-static rope. Used for work or rescues at height.

Rope resistance: 29kN

Dimensions: 80cm

Weight: 120g

FALL ARREST



FALL ARREST



TB-0020A LUCK RESCUE

Sliding fall arrester with flexible line with kernmantle rope of 11 to 12mm in diameter, with blocking function, comes with a 40cm DOUBLE LINK extender. For up to 200kg (two people). Comes with automatic oval connector with Keylock system.
Resistance: 15kN
Weight: 462g



TB-0020 LUCK

Sliding fall arrester for ropes with a diameter of 11mm to 12mm, made of aluminum. For work at height, acting to restrict possible falls and access by ropes. Comes with an automatic oval steel carabiner with Keylock system (25kN).
Resistance: 15kN
Weight: 390g



TB-0019 | TB-0021 RIBBON RING LUCK

Replacement webbing ring for LUCK fall arrester (TB-0020) with a length of 25cm or 40cm.



TB-0012 STEEL



Sliding fall arrester for flexible steel cable lines 5/16" (8mm), made of stainless steel. For work at height, acting to restrict possible falls. Comes with an automatic oval steel carabiner with Keylock system (25kN). For 8mm (5/16") cables.

Resistance: 15kN

Weight: 680g

TB-0029 RELOCK10



Retractable fall arrester equipped with a 4mm diameter steel cable and 10m long. Anti-rotation system, automatic oval connector with double lock, 80cm LINK webbing ring. Includes a recovery cord and carrying bag.

Resistance: 12kN

Weight: 5.9kg

Complies with EN 360 and NBR 14628.

ANCHORAGE





DOUBLE LINK STRAP

TA-0055 | TA-0056 | TA-0057



Type B anchoring device, with double protection, being a cover and core, with a twisted core for use with the manhole. It can be used in anchoring for various systems for working at height, confined spaces and assembling mobile fall arrest systems of the lifeline type.

Resistance: 34kN

Weight:

0,50m – 125g (Blue)

0,70m – 170g (Black)

0,90m – 195g (Yellow)

In compliance with EN 795B and NBR 16325-1.

Technical advantages

- Double protection (cover and core)
- Used as a Type B device and/or as part of a mobile system
- Unique product - patent required
- Twisted construction for the construction of the manhole
- There is no loss of load capacity when used with a manhole
- Normal tapes lose between 20% and 50% of their capacity in the manhole system.
- Red inner core, in case of wear of the cover, the user is immediately warned of the danger
- It has 3 sizes: 0.50m (blue), 0.70m (black) and 0.90m (yellow)

COLORS





EYE DOUBLE LINK STRAP

TA-0058 | TA-0059 | TA-0060



Type B anchoring device. It has double protection, being a cover and a core, with a red tape core for better visibility during inspections of the product in use. Its construction is twisted for use with manholes. With an incorporated eyelet with triple protection (two covers and a core). It can be used in anchoring for various systems for working at height, confined spaces and assembling mobile fall arrest systems of the lifeline type.

Resistance: 34kN

Weight:

196g (Blue)

218g (Black)

247g (Yellow)

In compliance with EN 795B e NBR 16325-1

Technical advantages

- Anchoring eye with triple protection (two layers and one core)
- Used as a Type B device and/or as part of a mobile system
- Unique product - patent required
- Twisted construction for the construction of the manhole
- There is no loss of capacity with a storm drain
- Red inner core, in case of wear of the cover, the user is immediately warned of the danger
- It has 3 sizes: 0.80m (blue), 1.0m (black) and 1.2m (yellow)

COLORS





TA-0051 | TA-0052 | TA-0053 I-SLING

Type B device. Made of high-tenacity polyester, 25mm wide, it has textile eyelets incorporated at both ends and can be used in anchorages for various systems for working at height, confined spaces and assembling mobile fall arrest systems such as lifelines.

- 5 triple electronic seams and textile rings at both ends;
- 25mm x 3.5mm double polyester tape
- Protection in tubular polyamide tape
- The piece is designed to allow greater versatility in the connections of a safety system
- Recommended for working at height, mobile, simple, semi-equalized and series anchorages

Weight:

150g (Blue)

200g (Black)

220g (Yellow)

Resistance: 22kN

In accordance with NBR 16325-1B and EN 795B

COLORS



TA-0048 | TA-0049 | TA-0050 LINK

Type B device. Made of high-tenacity polyester, 20mm wide, it can be used in anchorages for various systems for working at height, confined spaces and assembling mobile fall arrest systems such as lifelines.

- The part is designed to allow greater versatility in the connections of a safety system.
- Recommended for working at height, mobile, simple, semi-equalized and series anchorages.
- Material: Polyester

Resistance: 25kN

Weight:

78g - Blue

95g - Black

136g - Yellow

In accordance with NBR 16325-1B and EN 795B.

COLORS



ANCHORAGE



TC-0012 | TC-0023
I-CABLE



5/16" (8mm) stainless steel anchor cable, with eyelets at the ends. Resistance: 25kN. Size: 1.20m and 1.60m. Weight: 500g and 610g

RP-300
SMALL RIGGING PLATE



Anchoring multiplier plate made of high-strength and durable aluminum. Its 1:3 format distributes 1 connection point to 3 others during vertical maneuvers or in confined spaces. Resistance: 36kN. Weight: 58g

RP-310
MEDIUM RIGGING PLATE



Anchor multiplier plate, made of high-strength and durable aluminum. Resistance: 40kN. Weight: 212g

RP-320
LARGE RIGGING PLATE



Anchor multiplier plate, made of high-strength and durable aluminum. Resistance: 4kN. Weight: 442g

RP-302
SMALL HALO RIGGING PLATE



Compact anchor multiplier plate, made of high-strength and durable aluminum. Resistance: 40kN. Weight: 140g

RP-303
MEDIUM HALO RIGGING PLATE



Compact anchor multiplier plate, made of high-strength and durable aluminum. Resistance: 50kN. Weight: 246g

RP-304
LARGE HALO RIGGING PLATE



Compact anchor multiplier plate, made of high-strength and durable aluminum. Resistance: 70kN. Weight: 404g

TA-0039
DOG PLATE 1/3



Small anchor multiplier plate 1:3, made of stainless steel. Resistance: 36kN. Weight: 230g

ANCHORAGE



TA-0033
BEAR PLATE



3:5 anchor multiplier plate, made of stainless steel.
Resistance: 45kN
Weight: 420g

TA-0044
RB ANCHOR



Removable "B" type anchoring device with eyelet at the end and 22kN resistance. Complies with ANSI Z359.7 & CE-EN 795.
Weight: 200g

TA-0045
TOGGLE ANCHOR

TA-0046
EASY SLIDER
I-BEAM ANCHOR



Removable "B" type anchor device with eyelet at the end and with a resistance of 22kN. Complies with ANSI Z359.18, ANSI Z359.7, OSHA 1910.66, OSHA 1926.502, EN 795:2012.
Weight: 200g



Anchor multiplier plate, made of high-strength and durable aluminum.
Resistance: 4kN
Weight: 442g

TA-0047
SUPER SLIDER
I-BEAM ANCHOR



Type "B" anchoring device for metal structures. Ideal for mobile anchoring. Complies with ANSI Z359.18, ANSI Z359.7, OSHA 1910.66, OSHA 1926.502, EN 795:2012. Weight: 1.61kg



TM-0047 (MGO 55 + string 11mm)
TM-0047A (MGO 55 + string 12mm)
TM-0048 (MGO 110 + string 11mm)
TM-0048A (MGO 110 with string 12mm)

FIBER BRAZ

Maneuvering pole, designed to reach anchor points from the ground or structures. The equipment allows the assembly of a temporary vertical lifeline, keeping the worker anchored from the ground and protecting him from falls.

Length: 7.6m

Weight:

MGO 55 – 9,100kg MGO 110 – 9,500kg

Includes:

- 55mm MGO connector (23kN) in steel or 110mm in aluminum (23kN)
- 10m of semi-static rope (11 or 12mm in diameter)
- 10m of cord (4mm) for opening the hook
- Backpack made of cordura with individual supports for each element, ensuring safe and practical transport

ANCHORAGE



TLV-017
POST 500



Horizontal lifeline post with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 7kg

TLV-013
POST 500 INOX



Horizontal lifeline post with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 7kg

TLV-012
POST 600



Horizontal lifeline post with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 7.5kg

TLV-014
POST 600 INOX



Horizontal lifeline post with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 7.5kg

TLV-064
POST LATERAL
1000



Horizontal lifeline post for lateral installations, with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 9kg

TLV-063
POST LATERAL
1000 INOX



Horizontal lifeline post for lateral installations, with universal fitting base for easy installation on any structure, with an upper fixing point for anchoring ring.
Weight: 9kg

TLV-095 (10mm)
TLV-096 (8mm)
SS CABLE 3/8



3/8" (10mm) stainless steel cable, 6X19-AA steel core, regular right-hand lay. Complies with EN 795.
Weight: 400g/m | 285g/m

TLV-097 (10mm)
TLV-098 (8mm)
SS CABLE 5/16



Galvanized steel wire rope 5/16" (8mm), steel core 6X19-AA, regular right-hand lay. Complies with EN 795.
Weight: 400g/m | 285g/m

ANCHORAGE



TLV-099
SHOCK ABS FLAT



Energy absorber designed to absorb the impact of falls on lifelines with horizontal steel cables.

TLV-099A
SHOCK ABS VERT



Energy absorber designed to absorb the impact of falls on vertical steel wire lifelines.

TLV-010
FOOT 100



Base plate for installing anchors, can be used with rings (ZONE ANCHOR) to draw a specific lifeline. Complies with EN 795. Weight: 0.470 kg

TLV-008 | TLV-062
FOOT 250



Base plate for installing anchors, can be used with rings (ZONE ANCHOR) to draw a specific lifeline. Complies with EN 795. Weight: 2.7 kg

TLV-048
H-CLIP ON 3/8



Steel cable terminal, heavy duty clamp, made of carbon steel and stainless steel. Complies with EN 795. Weight: 132g

TLV-105
H-CLIP ON 5/16



Steel cable terminal, heavy duty clamp, made of carbon steel and stainless steel. Complies with EN 795. Weight: 55g

TLV-139
H-CLIP ON INOX 3/8



Steel cable terminal, heavy duty clamp, made of carbon steel and stainless steel. Complies with EN 795. Weight: 132g

TLV-140
H-CLIP ON INOX 5/16



Steel cable terminal, heavy duty clamp, made of carbon steel and stainless steel. Complies with EN 795. Weight: 55g

ANCHORAGE



TLV-106

H-SAP 5/16
GALVANIZED STEEL



Heavy duty steel cable clamp made of carbon steel. Complies with EN 795. Weight: 198g

TLV-142

H-SAP 5/16 INOX



Light, heavy duty steel cable clamp made of stainless steel. Complies with EN 795. Weight: 198g

TLV-050

H-SAP 3/8
GALVANIZED STEEL



Heavy duty steel cable clamp made of carbon steel. Complies with EN 795. Weight: 110g

TLV-141

H-SAP 3/8 INOX



Light, heavy duty steel cable clamp made of stainless steel. Complies with EN 795. Weight: 110g

TLV-167

ZONE ANCHOR
W/ SCREWS



Type "A" anchoring device, made of stainless steel, with a resistance of 34kN, with a 12mm screw. Weight: 0.210g

TLV-168 | TLV-169 | TLV-170
FIX BAR ZINC



Kit for fixing the base of the posts to the base plate, consisting of 4 galvanized M12 threaded bars. Comes with 8 nuts and 8 galvanized steel washers. Weight: 110g

TLV-165 | TLV-166
FIX BAR INOX



Kit for fixing the base of the posts with the base plate, consisting of 4 galvanized M12 threaded bars. Comes with 8 nuts and 8 galvanized steel washers. Weight: 110g

TLV-042
CARBON STEEL
PULL



Turnbuckle for 5/16" (8mm) to 3/8" (10mm) steel cables for use on horizontal or vertical lifelines. Made of carbon steel. Complies with EN 795. Weight: 0.845kg



TA-0123

EASY ROPE

Mobile lifeline system with 12mm semi-static rope, comes with two automatic oval carabiners with Keylock system and two 1.15m anchoring straps. Has a mechanical control and adjustment system. Comes with a 20-liter STANK bag for transportation. Ideal for short-term work or temporary installations, as it can be installed and removed quickly. For movement restrictions of up to 2 people.

Size: 20 meters

Weight: 3.230kg



Technical advantages

- Quick and easy assembly, the product comes ready and assembled
- Can be used by one or two people
- Recommended as an anchoring device in a SPIQ
- Does not require maintenance, only periodic inspection
- Complies with EN 795 and NBR 16325-2 TYPE C

TLV-004

BRUTUZ



Type A1/C anchoring device, with the capacity to withstand forces of up to 5,000 kgf or 50 kN, for up to two people. For anchoring multiple carabiners or steel cables. Robust and with an innovative design, it has no sharp corners.
Weight: 210g

TLV-009

ZONE ANCHOR



Type A anchoring device, made of stainless steel, with a resistance of 34kN, for use in work at height, confined spaces, lifelines, rope access and rescue operations.
Weight: 210g

TLV-045 | TLV-046

CHEMICAL AMPOULE KIT



Two-component glass ampoule, in the exact quantity for its fixation (avoiding waste). Box with 10 ampoules of 1/2" (12mm) or 3/8" (10mm).
Weight: 250g



TA-0123 KIT UP

Vertical lifeline for fixed ladder

Upper post: 1400mm x 40mm x 3mm

Lower post: 550mm x 40mm x 3mm

Both in hot-dip galvanized steel.

Supplied with fixing accessories: M12 x 50 hex bolts, M12 self-locking nut and stainless steel washer. Clamps for 8mm "heavy" steel cables, heavy washer; M8 "U" fixing clamps with spring washers and M8 hex nuts CL. 8 DIN 934; Turnbuckle for 8mm cable; Step fixing base, 5/16" steel cable and energy absorber (ABS).

TLV-150

Kit UP Aa
5m with ABS

TLV-151

Kit UP Aa
10m with ABS

TLV-152

Kit UP Aa
15m with ABS

TLV-153

Kit UP Aa
20m with ABS

TLV-154

Kit UP Aa
25m with ABS

TLV-155

Kit UP Aa
30m with ABS

TLV-156

Kit UP Aa
35m with ABS

TLV-157

Kit UP Aa
40m with ABS

TLV-158

Kit UP Aa
45m with ABS

TLV-159

Kit UP Aa
50m with ABS

TLV-059

THREADED BAR M-12 INOX



1 meter threaded rod – M12.
Made of stainless steel and galvanized steel.
Weight: 690g

TLV-047


KIT MECHANICAL FIX PARABOLT



10 Mechanical Fix Parabolt
102mm x 12mm – stainless steel
fixing – 3000kgf.
Weight: 117g



VISIT THE WEBSITE

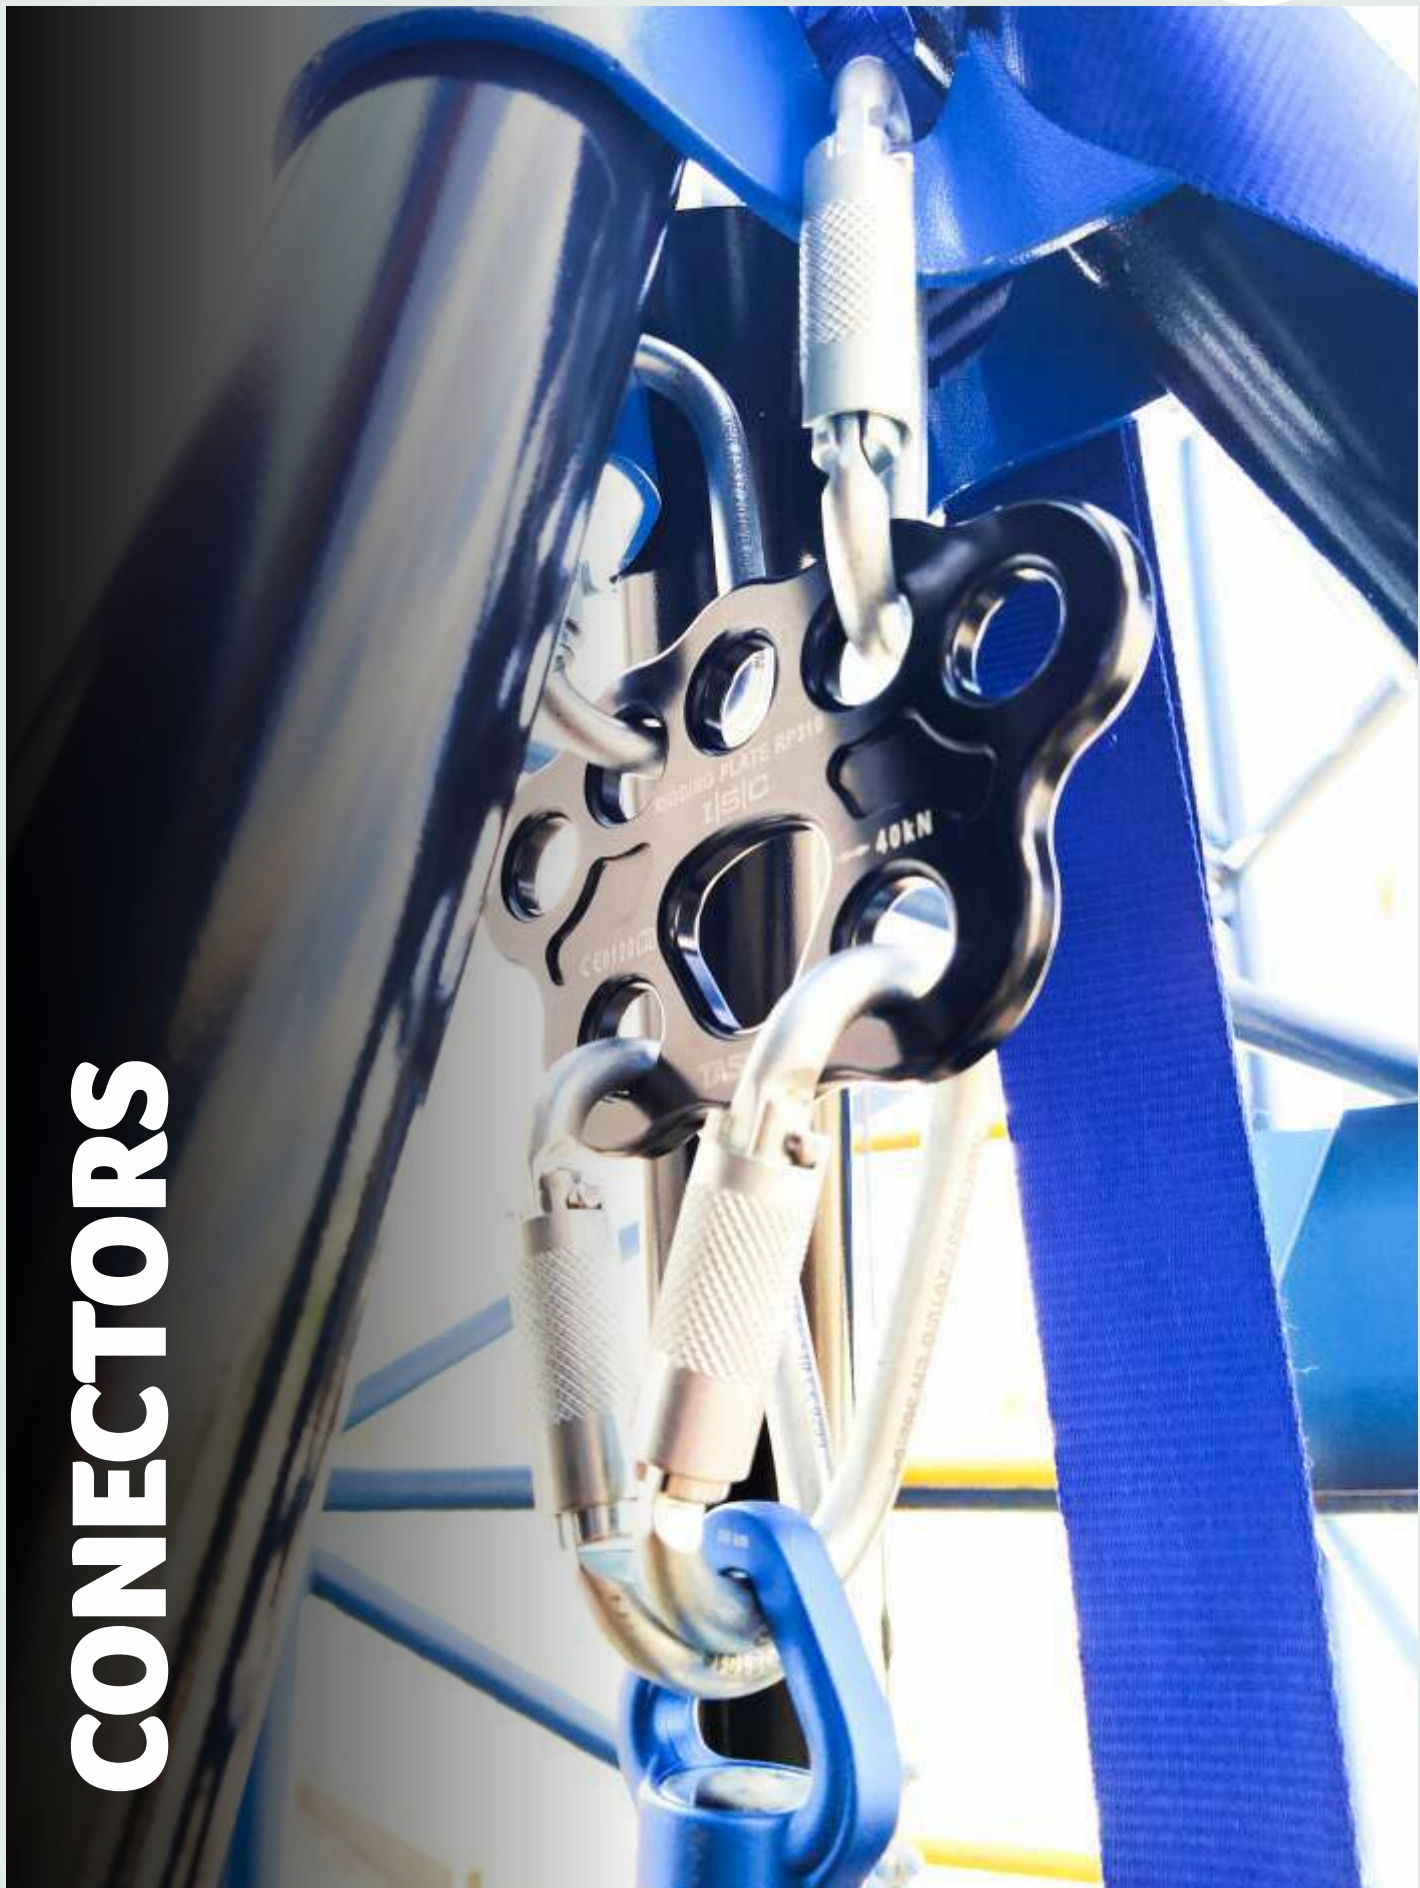

CONNECTORS

CONNECTORS



TM-0011
BULLET Z



Oval connector with thread lock, made of steel and standard hook system, with 20mm opening. Resistance: 22kN (L) and 7kN (T)
Weight: 160g

TM-0040
BULLET Z AUTO



Oval connector with automatic lock, made of steel, and Keylock system with 20mm opening. Resistance: 25kN (L) and 8kN (T)
Weight: 196g

TM-0057
BULLET Z TRIPLE



Oval connector with automatic triple lock, made of steel, and Keylock system with 17mm opening. Resistance: 25kN (L) and 8kN (T)
Weight: 196g

TM-0030
BULLET D



D-connector with screw lock, made of steel, with Keylock system with 25mm opening. Resistance: 40kN (L) and 14kN (T)
Weight: 215g

TM-0031
BULLET D AUTO



D connector with automatic lock, made of steel, has a Keylock system with a 25mm opening. Resistance: 40kN (L) and 14kN (T)
Weight: 235g

TM-0058
BULLET D TRIPLE



D connector with automatic lock, triple, made of steel, has a Keylock system with 20mm opening. Resistance: 40kN (L) and 14kN (T)
Weight: 230g

TM-0032
BULLET H



H-connector with screw lock, made of steel, with Keylock system for 28mm opening. Resistance: 45kN (L) and 16kN (T)
Weight: 242g

TM-0053
BULLET H AUTO



H connector with automatic lock, made of steel, with Keylock system with 25mm opening. Resistance: 45kN (L) and 16kN (T)
Weight: 256g

CONNECTORS



TM-0060

BULLET H TRIPLE



H connector with automatic triple lock, made of steel, with Keylock system for 26.5 mm opening. Resistance: 45kN (L) and 16kN(T) Weight: 256g

TM-0056

BULLET T AUTO



BULLET T AUTO connector or carabiner in aluminum, T type, with automatic closing and common lock, 140 mm opening. Resistance: 22kN Weight: 120g

TM-0013

BIG X MGO AUTO



BIG X MGO AUTO connector or carabiner, in steel, type A, automatic closing and Keylock lock. Resistance: 23kN Weight: 490g

TM-0055

MASTER D AUTO



Aluminum D-connector, with automatic closing and Keylock lock, and 18mm opening. Resistance: 22kN (L) and 9kN(T) Weight: 84g

TM-0059

MASTER D TRIPLE



Aluminum D-connector, with automatic closing and Keylock lock, and 18mm opening. Resistance: 22kN (L) and 9kN(T) Weight: 84g

TM-0010

MASTER D TRIPLE SPIN PLATE PULLEY



MASTER D TRIPLE SPIN PLATE PULLEY connector or carabiner, with pulley and plate, in aluminum, symmetrical D, type B. Resistance: 30kN Weight: 268g

TM-0009

MASTER D TRIPLE PULLEY EYE PULLEY



MASTER D TRIPLE EYE PULLEY connector or carabiner, in aluminum, with pulley and eye, symmetrical D, type B. Resistance: 25kN Weight: 184g

TM-0033

ELITE D



D-shaped connector with thread lock, in aluminum, with Keylock system and 17mm opening. Resistance: 26kN(L) and 8kN(T) Weight: 58g

CONNECTORS



TM-0046 MASTER D-S OPEN



D connector without lock, in aluminum with Keylock system and 20mm opening.
Resistance: 26kN (L) and 9kN (T)
Weight: 56g

TM-0022 | TM-0023 ECLIPSE



Oval quick-release mesh with thread, made of steel. 6mm and 8mm opening.
Resistance:
6mm - 20kN (W) and 10kN (T) - 42g
8mm - 35kN (W) and 10kN (T) - 90g

TM-0019 | TM-0020 TRIANGLE



Delta quick-release mesh with thread, made of steel. 8mm and 10mm opening.
Strength and weight:
8mm - 27kN - 86g
10mm - 35kN - 156g

TM-0021 H-MOON



Half-moon quick-release mesh with thread, made of steel. 10mm opening.
Resistance: 35kN (L) and 10kN (T)
Weight: 156g



VISIT THE WEBSITE

Keylock connectors are those with a smooth nose, without teeth. They are quick and easy to use, making operations simpler. This type of connector is ideal for rope access, fortune-telling techniques and all types of rescue interventions, as they do not get caught in textile anchors.

The ingenious system solves the problems that occur in connectors with traditional designs, ensuring more accessible handling.



RESCUE STRETCHERS



RESCUE STRETCHERS



RESCUE STRETCHERS



Envelope stretcher for rescue at height and transport

STR PLUS II

TX-0048 | TX-0056


Colors: Orange and black
Material: HDPE plate
Weight: 12.4kg



The STR PLUS II® is the latest model in the STR® family of technical rescue stretchers developed by TASK over the past 15 years. It is a versatile, ready-to-use envelope-type stretcher that does not require the installation of straps, handles, ropes or other equipment for its assembly, for securing the victim to its structure or for performing any vertical rescue technique involving stretcher movement. This provides a faster response from the rescue team in the protocols for assisting victims who require care and protection when placed on a stretcher for vertical or terrestrial movement.

Despite the new design and the incorporation of some technological improvements, the STR PLUS II® Stretcher also features the pioneering DSS – Double Safety System® safety system already introduced by the STR® family. DSS® is a system patented by TASK that integrates a single set of straps with automatic buckles into the stretcher structure, ready for use, which simultaneously incorporates a belt for fixing the patient inside the board and 6 more side straps and a rigid arch for suspension in any configuration or position in which it is being moved at vertical, horizontal, inclined angles or with varying angles, in order to prevent the victim from becoming unstable or from falling off the stretcher.

RESCUE STRETCHERS



Envelope stretcher for rescue in confined spaces


H-STR PLUS II

TX-0041 | TX-0042

Colors: Orange and black
Construction material: HDPE plate
Weight: 6.850kg



It is intended for vertical rescue operations in any environment, especially in small spaces in different industrial, urban, maritime and vertical scenarios, as it allows the victim's hip to be flexed, offering greater mobility, agility and comfort.

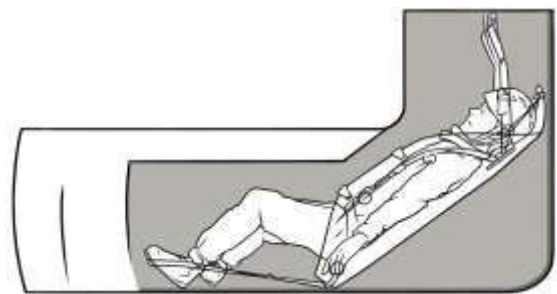

The H-STR PLUS II® stretcher is a flexible envelope-type rescue stretcher, which was developed and designed with reduced dimensions and is ideal for transporting and rescuing victims in different industrial, urban, maritime and vertical scenarios, especially places and equipment with small spaces, as it allows the victim's (user's) hip to be flexed, offering greater mobility. With double DSS® safety system and Harness H®.

RESCUE STRETCHERS



Basket stretcher for rescue at height and transport

BLOCK II

TX-0002

Color: Black

Construction material: HDPE plate and carbon steel body

Weight: 19.2kg



The BLOCK II® stretcher is a basket-type stretcher, ideal for transporting and rescuing victims in different industrial, urban, maritime, vertical and dragging scenarios. It has a double DSS® safety system and a Harness H® system that allows the victim to be secured with or without a board, ensuring double safety.

RESCUE STRETCHERS



KIT-008 KIT STEF

Pulley kit for maneuvering STEF – Easy Balancing Technical System. STEF is used to vary the suspension position of STR family stretchers, from horizontal to vertical and vice versa. It allows for advance planning of rescue movements in difficult-to-access environments, especially in confined spaces where vertical movement can be winding, requiring variation and inclination of the stretcher while still suspended.

Weight: 2.315 kg

Composition of the kit:

TR-0004A – STATIC STITCHED EYE TASK 10.5 mm 7 m

TP-0065 – DOUBLE LIGHT BLUE 2

TP-0063 – SINGLE LIGHT BLUE 1

MP-0018A – ROPE GRAB II – FIXED 1

TM-0054 – AUTO ALUMINUM BULLET DOUBLE LOCK 5

TX-0004 POLYETHYLENE BOARD



Long board made of polyethylene with high impact resistance for first aid, designed for manual transportation of victims. Allows for rescue in water. Comes with 3 straps to secure the victim to the board.

Weight: 9.0kg

TX-0008 KED



Vest for restraining victims with spinal trauma. The equipment is used in conjunction with the cervical collar, allowing the restriction of movement of the head, cervical and lumbar spine in an anatomical position. Adult size.

Weight: 2.1kg

TX-0009 H-BLOCK



Block for restraining the head and cervical region, made of Gelplastic and electronically welded with EVA inside. Device used in conjunction with the long board and cervical collar.

Weight: 570g



TX-0010 TX-0011 TX-0012 NECK COLLAR



Cervical collar designed to restrain the joints of the cervical region in a neutral and anatomical position, for comfort. With chin support, front opening for carotid pulse analysis and access to the trachea, rear opening for ventilation and fluid drainage. Single use, disposable product.


Weight: 118g

TRIPODS

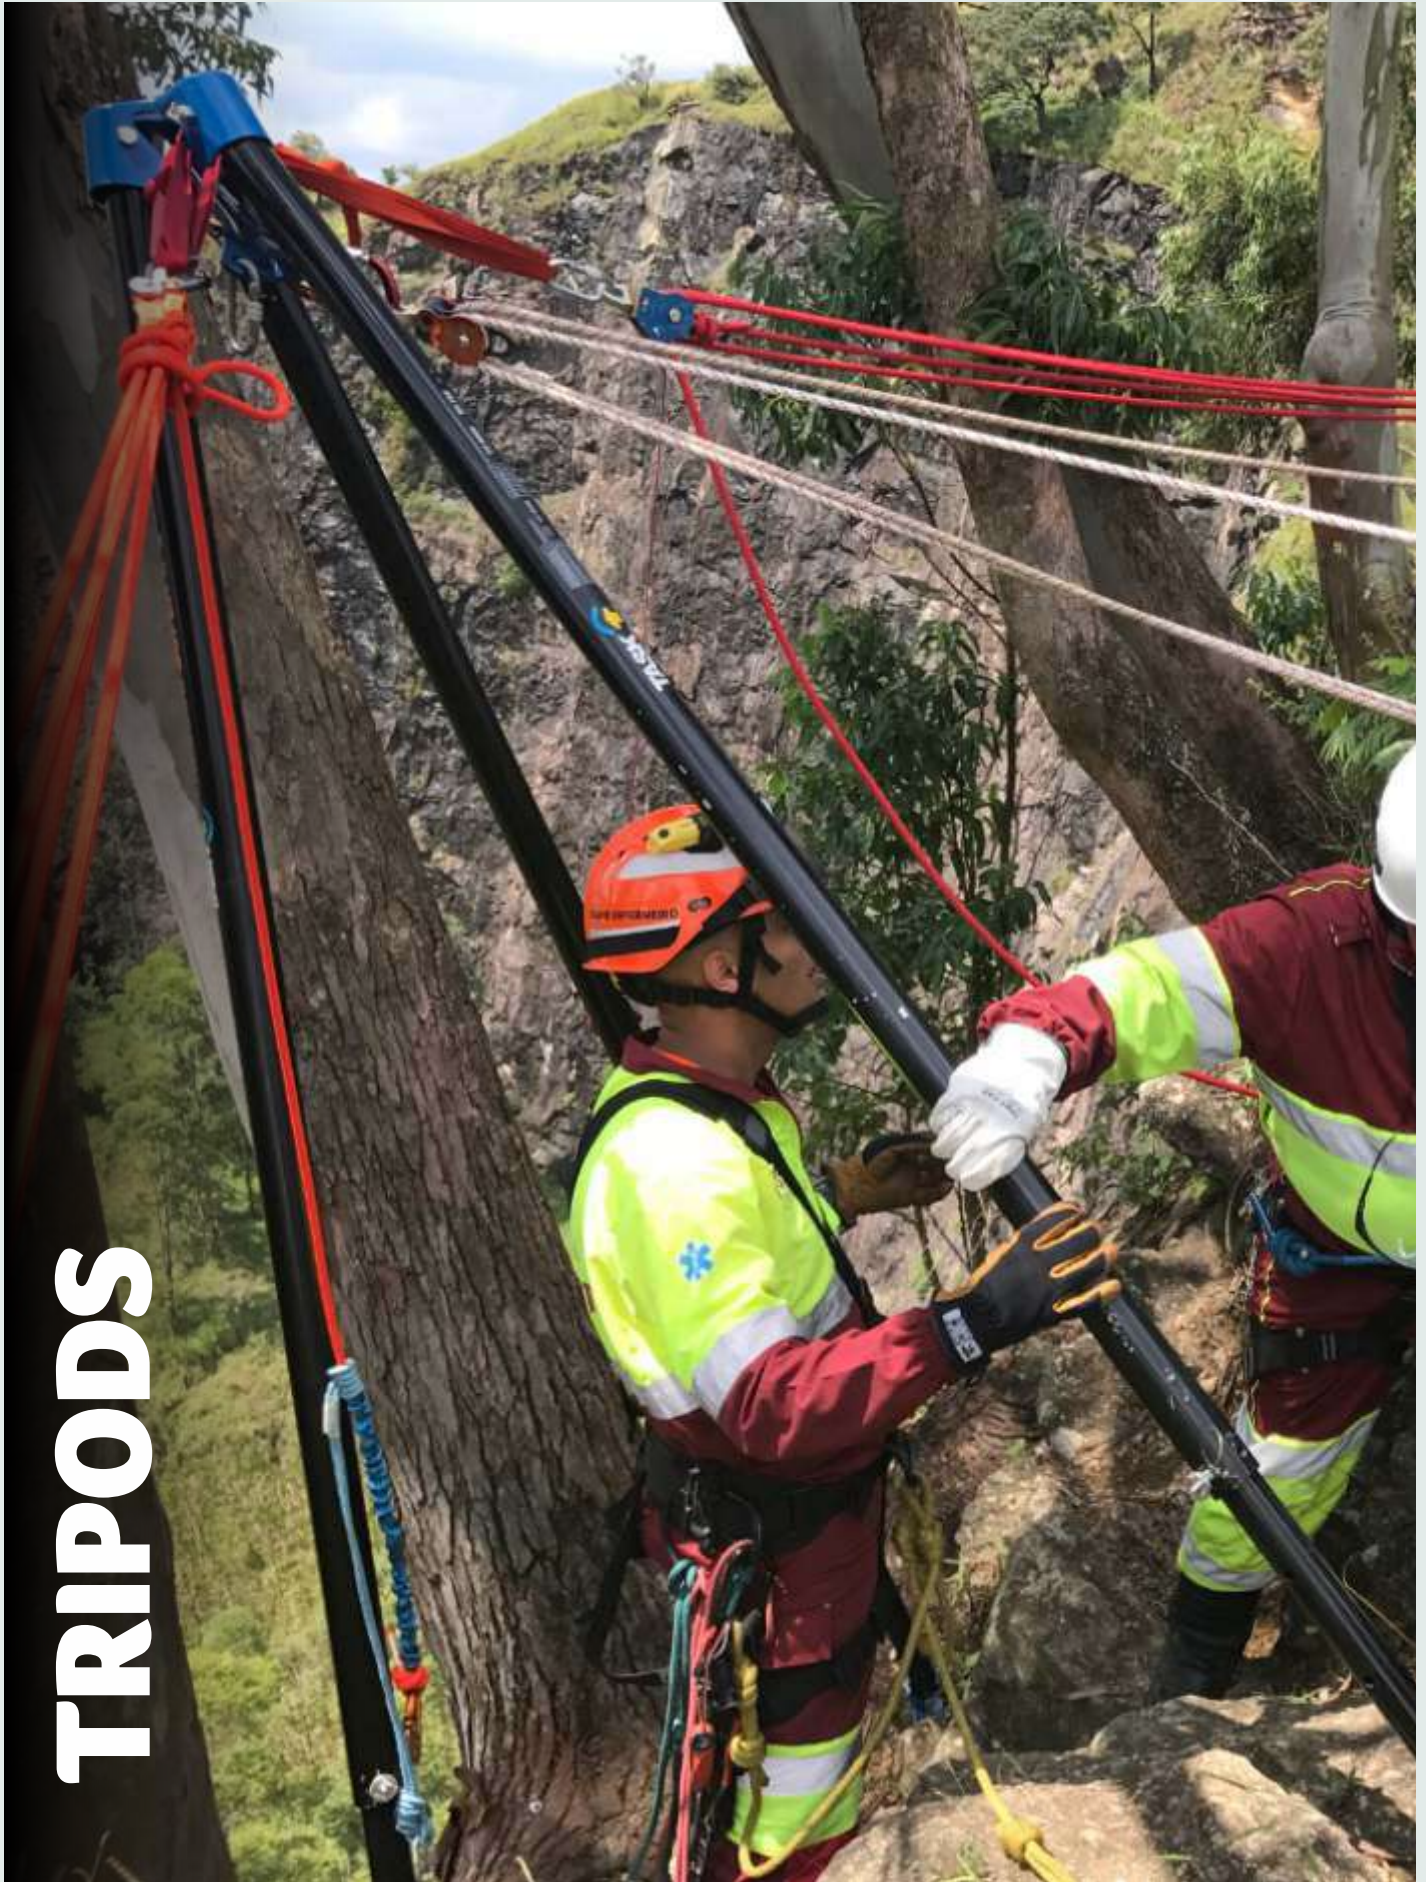

TRIPODS

TRIPODS



Transportable anchoring device

SYSTEM WENDIX

TX-0047

Safe working load: 13kN

Minimum height: 0.60m

Maximum height: 3.07m

Weight: 47kg




The WENDIX SYSTEM is a unique system for work and rescue situations in hard-to-reach places, for 1 or 2 people at the same time, according to the assembly possibilities described in the manual.

It is considered a type B transportable anchoring device, intended for use as part of a SPIQ – Personal Individual Fall Protection System. It is the ideal solution with numerous assembly and size variations, as it can be assembled as a tripod, bipod and monopod. A unique system for work and rescue situations in hard-to-reach places.

Its head, legs and rosette are made of steel, thus ensuring greater resistance and reliability during use. Its legs are made of aeronautical aluminum alloy. It has electrostatic polyester painting (black) to ensure greater chemical and mechanical resistance against impacts, corrosion and radiation.

Each leg can have 1 to 3 tubes and a height variation of 0.6m to 3.07m in 12cm intervals, facilitating use in the most difficult and diverse places. In compliance with NBR 16325-1.B, EN 795B and NFPA 1983.

TRIPODS



Transportable anchoring device

RESCUE SUPER II

TX-0005

Safe working load: 500 to 940kg

Minimum height: 1.80m

Maximum height: 3.10m

Weight: 32.30kg




The RESCUE SUPER II tripod is a transportable type B anchor device designed for use as part of a personal fall protection system or a temporary anchor system for vertical work and rescues.

Its tubular legs with a modern, environmentally friendly (solvent-free) KTL surface treatment have eleven height adjustment points, making it extremely versatile, as all components have anodized quick-locking pins with a ball, and are unmissable. The traceability system (individual product number) is engraved.

Its generously sized steel legs and head ensure high resistance. The head has three robust anchor points with large holes for connecting carabiners, thus ensuring that the load is always correctly centered.

The legs have joints that allow them to accommodate flat or uneven surfaces, enabling them to be positioned to drive into soils of moderate consistency, such as compact earth or ice, for example. In addition, the legs have holes that allow them to be fixed to the ground to prevent slipping. Double fixing system: with flat limiting tape and screw in the floor. Telescopic legs, which allow the feet to be fixed at different heights. Easy assembly and transport. Complies with NBR 16325-1.B, EN 795B and NFPA 1983.

TRIPODS



Transportable anchoring device

SUPERWORK

TX-0052

Safe working load: 500 to 940kg

Minimum height: 1.50m

Maximum height: 2.22m

Weight: 23.70kg



The SUPERWORK tripod is a transportable type B anchoring device, used in vertical operations and in confined spaces and work at height, with lifting using pulley systems (optional on the product). Work in silos, water tanks, manholes and other confined spaces.

The head has three robust anchoring points with large holes for connecting connectors, thus ensuring that the load is always correctly centered.

The legs have holes that allow them to be fixed to the ground to prevent slipping. Double fixing system: with flat limiting tape and screw in the floor. Telescopic legs, which allow the feet to be fixed at different heights. Stabilization capacity with straps using the upper hole of the head for connection. Lightweight, easy to assemble and transport. Complies with NBR 16325-1.B, EN 795B and NFPA 1983.



PRE-ENGINEERING SYSTEMS





PGA-015A | PGA-015B | PGA-015C | PGA-015D SYSTEM 3:1 R.L. RESCUE 3

Manually operated pre-engineered system based on the use of an easy-to-use device, with two simple pulleys and an integrated automatic locking or unlocking mechanism R.L. AUTOMATIC LOCKING PULLEY.

It is configured for vertical movements through a system with a mechanical advantage of 3:1. It has an overspeed lock that is automatically activated if the user releases the control rope. The automatic locking system works in both directions (bidirectional), providing a safe and practical system for raising and lowering people at work or in rescue operations. For EN 1891A ropes, between 10.5mm and 11mm in diameter.

Kit composition:

PGA-015A (50m)

TP-0033 LARGE ALUMINUM SINGLE PULLEY 30KN CE EM - BIG SINGLE TECH (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (3 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR TAPE - 1 M BLACK / BLUE (1 piece)

TL-0102 20 LITER WATERPROOF BACKPACK – STANK 20L - BLUE (1 piece)

TP-0030 RL LOCKING PULLEY (1 piece)

PGA-015B (100m) | PGA-015C (150m) | PGA-015D (200m)

TP-0033 BIG SINGLE TECH ALUMINUM PULLEY 30KN CE EM (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (3 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR STRAP - 1 M BLACK / BLUE (1 piece)

TL-0081 37 LITER WATERPROOF BACKPACK – STANK 37L - BLACK (1 piece)

TP-0030 RL LOCKING PULLEY (1 piece)



PGA-016A | PGA-016B | PGA-016C | PGA-016D SYSTEM 4:1 R.L. RESCUE 4

Manually operated pre-engineered system based on the use of an easy-to-handle device, with a single pulley, a double pulley and an integrated automatic locking and unlocking mechanism R.L. AUTOMATIC LOCKING PULLEY.

It is configured for vertical movements through a system with a mechanical advantage of 4:1, with an overspeed lock that is automatically activated if the user releases the control rope. It has an automatic locking system in both directions (bidirectional), being safe and practical for lifting and lowering people at work or in rescue operations. For EN 1891A ropes between 10.5mm and 11mm in diameter.

Kit composition:

PGA-016A (50m)

TP-0036 ALUMINUM DOUBLE PULLEY 30KN CE EN - DOUBLE TECH LIGHT PULLEY (1 piece)

TP-0033 LARGE ALUMINUM SINGLE PULLEY 30KN CE EN - BIG SINGLE TECH (1 piece)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (3 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR TAPE - 1 M BLACK / BLUE (1 piece)

TL-0102 20 LITER WATERPROOF BACKPACK – STANK 20L - BLUE (1 piece)

TP-0030 RL LOCKER PULLEY (1 piece)

PGA-016B (100m) | PGA-016C (150m) | PGA-016D (200m)

TP-0036 ALUMINUM DOUBLE PULLEY 30KN CE EN - DOUBLE TECH LIGHT PULLEY (1 piece)

TP-0033 ALUMINUM SINGLE PULLEY LARGE 30KN CE EN - BIG SINGLE TECH (1 piece)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (3 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR STRAP - 1 M BLACK / BLUE (1 piece)

TL-0081 37 LITER WATERPROOF BACKPACK – STANK 37L - BLACK (1 piece) part)

TP-0030 RL LOCKER PULLEY (1 piece)



PGA-017A | PGA-017B | PGA-017C | PGA-017D SYSTEM 5:1 R.L. RESCUE 5

Pre-engineered manual operation system based on the use of a revolutionary easy-to-use device, featuring two double pulleys and an integrated automatic locking or unlocking mechanism R.L. AUTOMATIC LOCKING PULLEY.

Configured for vertical movements through a system with a mechanical advantage of 5:1, it has an overspeed lock that is automatically activated if the user releases the control rope. The automatic locking system works in both directions (bidirectional). Safe and practical system for raising and lowering people at work or in rescue operations. For EN 1891A ropes between 10.5mm and 11mm in diameter.

Kit composition:

PGA-017A (50m)

TP-0036 ALUMINUM DOUBLE PULLEY 30KN CE EN - DOUBLE TECH LIGHT PULLEY (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (4 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR TAPE - 1 M BLACK / BLUE (1 piece)

TL-0102 20 LITER WATERPROOF BACKPACK – STANK 20L - BLUE (1 piece)

TP-0030 RL LOCKING PULLEY (1 piece)

PGA-017B (100m) | PGA-017C (150m) | PGA-017D (200m)

TP-0036 ALUMINUM DOUBLE PULLEY 30KN CE EN - DOUBLE TECH LIGHT PULLEY (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR – MASTER D AUTO (4 pieces)

TR-0061 STATIC WORKROPE - CE EN NBR UIAA 11.0 MM - WHITE

TA-0051 I-SLING ANCHOR TAPE - 1 M BLACK / BLUE (1 piece)

TL-0081 37 LITER WATERPROOF BACKPACK – STANK 37L - BLACK (1 piece)

TP-0030 RL LOCKING PULLEY (1 piece)



PGA-002A | PGA-002B LIFT 3

Easy-to-use pre-engineered system designed for simple vertical movements using a basic pulley system with a mechanical advantage of 3:1. The rope ends are electronically sewn to ensure system protection. It can be used for entry and rescue operations in confined spaces with vertical access to the interior and for work or rescue at height, provided the victim is suspended in a fall protection system. Weight: 7.4 kg

Composition of the kit:

PGA-002A

TP-0038 SINGLE STAINLESS STEEL PULLEY 38 KN CE EN - SINGLE PRO PULLEY (1 piece)

TP-0060 DOUBLE STAINLESS STEEL PULLEY 60KN CE EN - DOUBLE PRO PULLEY (1 piece)

TM-0055 ALUMINUM D DOUBLE LOCK 22KN KEYLOCK CE EN NBR – MASTER D AUTO (4 pieces)

TA-0022 SPIN - ALUMINUM ROPE SWIVEL WITH BEARING 30 KN CE EN (1 piece)

MP-0018A BLOCKER - PRE-ENGINEERING SYSTEMS (1 piece)

TA-0060 EYE DOUBLE LINK ANCHOR TAPE 1.20 METERS YELLOW/BLACK (1 piece)

TR-0025 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - WHITE 50 meters

TL-0102 20 LITER WATERPROOF BACKPACK – STANK 20L - BLUE (1 piece)

PGA-002B

TP-0038 SINGLE STAINLESS STEEL PULLEY 38 KN CE EN - SINGLE PRO PULLEY (1 piece)

TP-0060 DOUBLE STAINLESS STEEL PULLEY 60KN CE EN - DOUBLE PRO PULLEY (1 piece)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER D 22KN KEYLOCK CE EN NBR – MASTER D AUTO (4 pieces)

TA-0022 SPIN - ALUMINUM ROPE SWIVEL BEARING 30 KN CE EN (1 piece)

MP-0018A BLOCKER - PRE-ENGINEERED SYSTEMS (1 piece)

TA-0060 EYE DOUBLE LINK ANCHOR TAPE 1.20 METERS YELLOW/BLACK (1 piece)

TR-0025 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - WHITE 100 meters

TL-0081 37 LITER WATERPROOF BACKPACK – STANK 37L - BLACK (1 piece)



PGA-003A | PGA-003B

LIFT 4



Easy-to-use pre-engineered system designed for simple vertical movements using a basic pulley system with a mechanical advantage of 4:1. The rope ends are electronically sewn to ensure system protection. It can be used for entry and rescue operations in confined spaces with vertical access to the interior and for work or rescue at height, provided the victim is suspended in a fall protection system. Weight: 7.4 kg

Composition of the kit:

PGA-003A

TP-0060 DOUBLE STAINLESS STEEL PULLEY 60kN CE EN - DOUBLE PRO PULLEY (2 pieces)

TM-0055 ALUMINUM D DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR - MASTER D AUTO (4 pieces)

TA-0022 SPIN - ALUMINUM ROPE SWIVEL WITH BEARING 30 KN CE EN (1 piece)

MP-0018A BLOCKER - PRE-ENGINEERING SYSTEMS (1 piece)

TA-0060 EYE DOUBLE LINK ANCHOR TAPE 1.20 M YELLOW/BLACK (1 piece)

TR-0026 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - BLUE 50 meters

TL-0102 20 LITER WATERPROOF BACKPACK - STANK 20L - BLUE (1 piece)

PGA-003B

TP-0060 STAINLESS STEEL DOUBLE PULLEY 60kN CE EN - DOUBLE PRO PULLEY (2 pieces)

TM-0055 ALUMINUM D DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR - MASTER D AUTO (4 pieces)

TA-0022 SPIN - ALUMINUM ROPE SWIVEL BEARING 30 KN CE EN (1 piece)

MP-0018A BLOCKER - PRE-ENGINEERED SYSTEMS (1 piece)

TA-0060 EYE DOUBLE LINK ANCHOR TAPE 1.20 M YELLOW/BLACK (1 piece)

TR-0026 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - BLUE 100 meters

TL-0081 37 LITER WATERPROOF BACKPACK - STANK 37L - BLACK (1 piece)

PGA-001A (50m) | PGA-001B (100m)

LOOK DOWN



Easy and quick to use pre-engineered system designed for vertical rescue operations of a worker who has fallen from a height and is suspended by his fall protection system, facilitating his removal, without the need to use additional resources to move him, simultaneously, up or down to a safe place.

Weight: 8.2 kg

Composition of the kit:

PGA-001A

TP-0065 ALUMINUM DOUBLE PULLEY 36 KN CE EN - DOUBLE LIGHT PULLEY - BLUE (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCK CARABINER 22KN KEYLOCK CE EN NBR - MASTER D AUTO (5 pieces)

MP-0018A BLOCKER - PRE-ENGINEERING SYSTEMS (1 piece)

TA-0022 SPIN - ALUMINUM ROPE SWIVEL WITH BEARING 30 KN CE EN (1 piece)

RP-881 D4 PRO - DESCENDER FOR WORK AND RESCUE - WITHOUT ANTI-PANIC (1 piece)

TA-0052 I-SLING ANCHOR STRAP - 1.5 METERS BLACK (1 piece)

TR-0025 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - WHITE 10 meters

TR-0026 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - BLUE 50 meters

TL-0103 20 LITER WATERPROOF BACKPACK - STANK 20L - BLACK (1 piece)

TL-0103 20 LITER WATERPROOF BACKPACK - STANK 20L - BLACK (1 piece)

PGA-001B

TP-0065 ALUMINUM DOUBLE PULLEY 36 KN CE EN - DOUBLE LIGHT PULLEY - BLUE (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR - MASTER D AUTO (5 pieces)

MP-0018A BLOCKER - PRE-ENGINEERING SYSTEMS (1 piece)

TA-0022 SPIN - ROPE SWIVEL ALUMINUM BEARING 30 KN CE EN (1 piece)

RP-881 D4 PRO - DESCENDER FOR WORK AND RESCUE - WITHOUT ANTI-PANIC (1 piece)

TA-0052 I-SLING ANCHOR TAPE - 1.5 METERS BLACK (1 piece)

TR-0025 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - WHITE 10 meters

TR-0026 STATIC RESCUE ROPE - NFPA CE EN NBR - 10.5MM - BLUE 100 meters

TL-0081 20 LITER WATERPROOF BACKPACK - STANK 20L - BLACK (1 piece)



HB-105 - 105cm | HB-165 - 165cm | HB-300 - 300cm HAULERBINER



The HAULERBINER is a micro effort reduction system, consisting of automatic aluminum connectors with 3 small built-in pulleys and 6mm cords, capable of acting as a 6:1 or 7:1 reduction system with automatic locking. Developed after extensive market research, the product was made to correct all the flaws presented by conventional pulley systems. Lighter, easy to use, always ready, small in size and with great effort reduction power, the HAULERBINER is an innovative tool for rescues, rope access and work with stretchers. It works anchored to structures. The system offers a 6:1 reduction (pulling down). When attached to the user's belt or connections, the system offers a 7:1 reduction (pulling up). It works with a descender (D4 or D5) in a progressive capture system. It acts as a tension system for temporary lifelines and as a device for suspending stretchers (STR II, BLOCK and others) offering angle variation in rescue operations.

Weight: 575g

Resistance: 140kg

Complies with EN 12278 and En567.



PGA-013A | PGA-013B | PGA-013C | PGA-013D AIR BASKET RESCUE



Pre-engineered system developed to facilitate the rescue process for workers who are unable to self-rescue themselves from inside aerial baskets. The equipment provides a bilateral locking system, facilitating operation and providing safety. In the event of the rescue rope being released, the R-ALF locking system ensures complete safety when removing the victim from the aerial basket.

Weight: 8.2kg

Composition of the kit:

TP-0038 DOUBLE STAINLESS STEEL PULLEY 60kN CE EN - DOUBLE PRO PULLEY (2 pieces)

TM-0055 ALUMINUM DOUBLE LOCKING CARABINER 22KN KEYLOCK CE EN NBR
- MASTER D AUTO (4 pieces)

TR-0028 STATIC RESCUE ROPE - NFPA CE EN NBR - 11.0 MM - WHITE

TA-0053 I-SLING ANCHOR TAPE - 2 METERS BLACK/YELLOW (2 pieces)

TL-0102 WATERPROOF BACKPACK 20 LITERS - STANK 20L - BLUE (1 piece)

RP-431 R-ALF (Device only) (1 piece)

PULLEYS



PULLEYS

PULLEYS



TP-0038
SINGLE PRO



Single pulley, made of stainless steel with SPID bearings and movable plates, for ropes up to 13 mm in diameter. Ideal for handling systems and technical rescues.
Maximum working load: 38kN

TP-0060
DOUBLE PRO



Double pulley, made of stainless steel with SPID bearings and mobile plates, for ropes up to 13 mm in diameter, with lower connection point (LOAD BECKET). Ideal for handling systems and technical rescues at height and in confined spaces.
Maximum working load: 60kN

TP-0037
SPEED PRO



Double in-line pulley, made of ultra-resistant stainless steel, with SPID bearing system for smoother sliding, which generates less heat. Ideal for use on zip lines, and can also be used for rescue and work activities, suitable for ropes up to 13mm and steel cables up to 12mm.
Maximum working load: 30kN

TP-0033
BIG SINGLE TECH



Double in-line pulley with fixed plates, made of ultra-resistant aluminum, with aluminum pulleys, for ropes up to 12 mm in diameter, with SPID bearing system.
Resistance: 30kN
Weight: 270g

TP-0034
BIG DOUBLE TECH



Double pulley with movable plates, made of aluminum, with total resistance to salinity. For ropes up to 13 mm in diameter. It has the exclusive SPID bearing.
Resistance: 30kN
Weight: 560g

TP-0062 | TP-0063
SINGLE LIGHT



Compact and simple pulley with movable plates, made of high-strength aluminum, with the exclusive SPID bearing, for ropes up to 13 mm. Equipment recommended for use in handling systems, technical rescue at height and in confined spaces.
Maximum working load: 36kN

TP-0059
DOUBLE LIGHT



Compact, double pulley with movable plates made of high-strength aluminum, with exclusive SPID bearing, has a lower connection point (LOAD BECKET), for ropes up to 13 mm.
Maximum working load: 36kN



VISIT THE WEBSITE

PULLEYS



TP-0031 | TP-0032
SPEED LIGHT
ROPE



Double in-line pulley with fixed plates, made of ultra-resistant aluminum, with aluminum or stainless steel pulleys, for ropes up to 12mm in diameter, with SPID bearing system.

Resistance: 30kN
Weight: 270g

TP-0035
SINGLE TECH
LIGHT



Compact single pulley with movable plates, made of aluminum, with total resistance to salinity. For ropes up to 12 mm in diameter. It has the exclusive SPID bearing.

Resistance: 30kN
Weight: 150g

TP-0036
DOUBLE TECH
LIGHT



Compact double pulley with movable plates, made of aluminum, with total resistance to salinity. For ropes up to 12 mm in diameter. It has the exclusive SPID bearing.

Resistance: 30kN
Weight: 260g

PGA-018A
PGA-018B
PGA-018C - 150m
KIT R.L.



Bidirectional overspeed locking device that is automatically activated. For EN 1891A ropes, between 10.5mm and 11mm in diameter.

Maximum working load: 12kN
Weight: 1,200kg

RP-282
PHLOTICH
PULLEY



The PHLOTICH PULLEY is a multi-opening device specifically designed for SRT and DDRT. The new PHLOTICH pulley is available with bushings or bearings. For ropes up to 13mm.

Maximum working load: 40kN.
Weight: 150g

RP-048
COMPACT
RIGGING PULLEY



Pulley used in tree climbing for ropes up to 16mm. Minimum breaking load: 85kN Working load limit: 17kN
Weight: 490g

RP-050
CAST RIGGING
PULLEY



Pulley used in tree climbing for ropes up to 16mm. Minimum breaking load: 10kN Working load limit: 2kN
Weight: 1.565kg

RP-051
RIGGING PULLEY



Pulley used in tree climbing for ropes up to 25 mm. Minimum breaking load: 100kN Working load limit: 20kN
Weight: 1.6kg

PULLEYS



LK101A.2
ULTRALINK



Pulley for moving, redirecting and recovering in tree operations, with removable pulley and captive shaft. With triple safety of the SAFE LOCK system.
Resistance: 40kN
Weight: 182g

TM-0010 MASTER D TRIPLE SPIN PLATE PULLEY
TM-0009 MASTER D TRIPLE EYE PULLEY



MASTER D TRIPLE SPIN PLATE PULLEY connector or carabiner, with pulley and plate, in aluminum, symmetrical D, type B.
Resistance: 30kN
Weight: 268g



MASTER D TRIPLE EYE PULLEY connector or carabiner, in aluminum, with pulley and eye, symmetrical D, type B.
Resistance: 25kN
Weight: 184g

RP-063 SINGLE PRUSSIK



Single pulley, made of high-strength aluminum, with movable plates. Ideal for high loads at low speeds. For ropes up to 13 mm.
Maximum working load: 50 kN
Weight: 330g

TM-0009 MEDIUM DOUBLE PRUSSIK



Double pulley, made of high-strength aluminum, with movable plates. Ideal for high loads at low speeds. For ropes up to 13 mm.
Maximum working load: 50kN
Weight: 590g

TM-0033 MEDIUM SINGLE PRUSSIK LOAD BECKET



Single pulley made of high-strength aluminum. Ideal for high loads at low speeds. It has 2 large connection points that allow use with various types of connectors. For ropes up to 13mm.
Maximum working load: 50kN
Weight: 370g

RP-703B DOUBLE PROGRESS CAPTURE PULLEY



Self-locking double pulley, made of high-strength aluminum, has a handle for attaching a cord and for use at a distance. Equipment recommended for use in movement systems, technical rescue and confined spaces. For ropes up to 13mm.

RP-075 ZIPSPEED TANDEM



Pulley with shielded bearings for optimum performance and a service life of thousands of km. It has a rubber stop that helps absorb the impact at the end of the run. For steel cables up to 13mm.
Maximum working load: 40KN
Weight: 878g

TP-0061 WAYBLE



Large opening pulley, made of aluminum, with stainless steel lock and nylon pulley.
Maximum working load: 30kN
Weight: 1,506kg

ROPES



ROPES

ROPES



STATIC RESCUE

10.5mm Ø
Resistance: 29kN
Weight: 72g/m

11mm Ø
Resistance: 40.5kN
Weight: 83g/m

12mm Ø
Resistance: 42kN
Weight: 87g/m



1 fillet
10,5mm



2 fillets
11mm



3 fillets
12mm



PRODUCED IN THE
EUROPEAN UNION



The STATIC RESCUE NFPA CE EN NBR by Tendon rope, type A, is produced in Europe. The monochromatic product has a signaling system for easy identification of its diameter. Its composition is 100% polyamide. The cover is braided with its twisted core, thus improving attributes such as abrasion, resistance, absorption and elasticity. The rope is made with exclusive systems, namely: Fixed, Water Shield and Endurance. EN 1891 and NBR 15986 certification.

10.5mm

White TR-0025 | Blue TR-0026 | Black TR-0027 | Yellow TR-0038 | Orange TR-0066

11mm

White TR-0028 | Blue TR-0029 | Black TR-0030 | Yellow TR-0039 | Orange TR-0067

12mm

White TR-0031 | Blue TR-0032 | Black TR-0033 | Yellow TR-0040 | Orange TR-0068



STATIC WORK

10.5mm Ø
Resistance: 29kN
Weight: 72g/m

11mm Ø
Resistance: 32kN
Weight: 84g/m

12mm Ø
Resistance: 40kN
Weight: 87g/m

12.5mm Ø
Resistance: 42kN
Weight: 104g/m



1 fillet
10,5mm



2 fillets
11mm




3 fillets
12mm



4 fillets
12,5mm



PRODUCED IN THE
EUROPEAN UNION

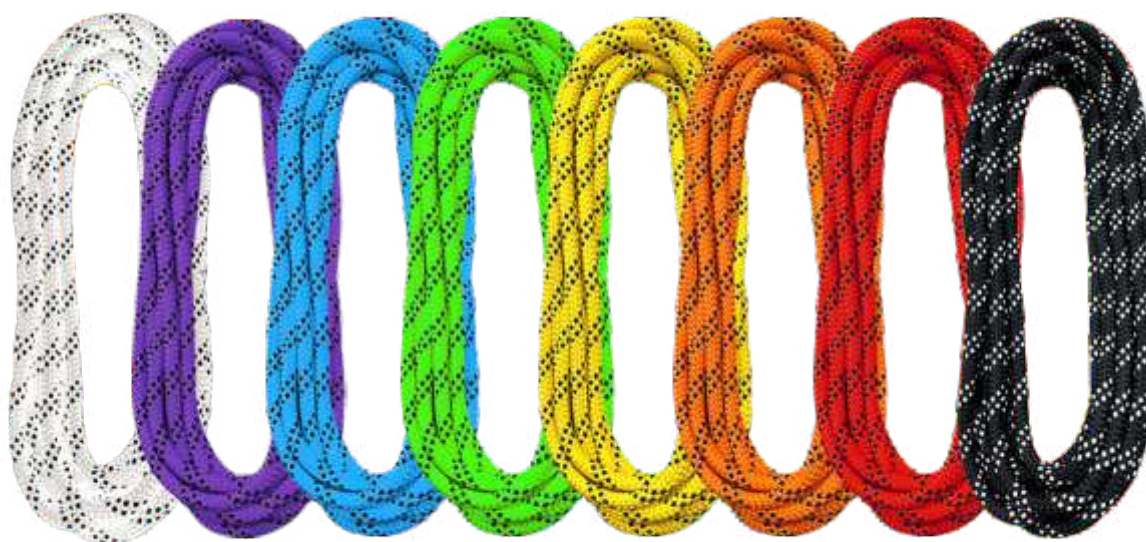

STATIC WORK EN 1891 is a type A rope, produced abroad. The monochromatic product has a signaling system for easy identification of its diameter, with a stripe, 10.5mm and resistance of 29kN, with two stripes, 11.0mm and resistance of 32kN, with three stripes, 12mm and resistance of 40kN and with four stripes, 12.5mm and resistance of 42kN.

National and international certifications CE 0082, EN 1891, NBR 15986 and UIAA 107. EN 1891 certification, complies with EN 12841 (fall arresters, manual descenders and blockers), according to the manufacturers' manual.

Built in imported materials, noble and resistant. Best cost-benefit (wear x certification x safety x price). Its composition is 100% polyamide. The cover is braided with its core twisted, thus improving attributes such as abrasion, resistance, absorption and elasticity.

10.5mm

TR-0059 - White | TR-0060 - Blue | TR-0073 - Black | TR-0074 - Yellow | TR-0075 - Red | TR-0066 - Orange
TR-0076 - Purple | TR-0077 - Green

11mm

TR-0062 - Blue | TR-0063 - Black | TR-0064 - Red | TR-0065 - Yellow | TR-0067 - Orange | TR-0078 - Purple
TR-0079 - Green

12mm

TR-0080 - White | TR-0081 - Blue | TR-0082 - Black | TR-0083 - Red | TR-0084 - Yellow | TR-0068 - Orange
TR-0085 - Purple | TR-0086 - Green

12.5mm

TR-0087 - Orange | TR-0088 - Purple



TR-0071 STATIC EYE & EYE

The selected static rope can be produced with one or two eyes sewn into the end upon request.



- Greater peace of mind and safety for users
- Simply connect the rope to the anchor point
- Industrial, urban and sports environments
- Eyelets sewn in polyamide thread
- Triple electronic stitching
- Contrasting color for easy inspection
- Tubular tape for abrasion protection
- Sewn ends prevent equipment from passing through
- Eyelets increase the nominal resistance of the rope
- Wear through crushing
- Three times more resistant than the figure eight knot
- No need to discount the making of knots in the ropes
- With traceability system

Options

- 10.5mm - STATIC WORK CE EN 1891, type A rope
- 11mm - STATIC WORK CE EN 1891, type A rope
- 12mm - STATIC WORK CE EN 1891, type A rope
- 12.5mm - STATIC WORK CE EN 1891, type A rope
- 10.5mm - STATIC RESCUE NFPA CE EN NBR, type A rope
- 11mm - STATIC RESCUE NFPA CE EN NBR, type A rope



TR-0034 DYNAMIC ACC 9,8

Dynamic rope with a diameter of 9.8 mm, produced in the European Union, with 34% stretch. The product features a high-stretch Kernmantle construction that absorbs any falls. The rope is 100% made of polyamide and developed with the Fixed system, which produces a customized braid that gives the rope greater flexibility. The Water Shield finishing method repels water and other particles that could damage the rope's cover or core. To ensure that the product has a long useful life, the Endurance system is responsible for maintaining its load capacity and properties. Ideal for sports, widely used in climbing.

9.8 mm Ø
Resistance: 7.9kN
Weight: 64g/m


TR-0035 (5mm) | TR-0036 (6mm) | TR-0037 (7mm) CALIBER 5

Cord manufactured in the European Union, monochromatic product, its composition is 100% polyamide with cover and core construction, which gives the cover low slippage thanks to its differentiated manufacturing system. In compliance with CE 1019 and EN 564. EN 1891 and NBR15986 certification.

5mm Ø
Resistance: 5kN
Weight: 18.9g/m

6mm Ø
Resistance: 10kN
Weight: 23.2g/m

7mm Ø
Resistance: 13kN
Weight: 34g/m

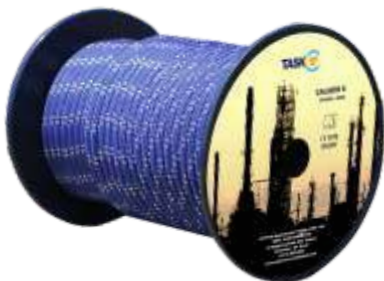

ROPES



TR-0069 | TR-0056 | TR-0051
TR-0102 | TR-0103 | TR-0104

P8 PRUSSIK



Cord with 8mm diameter and available in 65, 75 and 90cm with eyelet sewn on the ends. Made of aramid, it is much more resistant to heat and abrasion.

TR-0098 | TR-0100 | TR-0101

P9 PRUSSIK



Cord with 9mm diameter and available in 65, 75 and 90cm with eyelet sewn on the ends. Made of aramid, it is much more resistant to heat and abrasion.

TR-0070 | TR-0057 | TR-0052
TR-0105 | TR-0106 | TR-0107

P10 PRUSSIK



Cord with 10mm diameter and available in 65, 75 and 90cm with eyelet sewn on the ends. Made of aramid, it is much more resistant to heat and abrasion.

TR-0046A | TR-0046B
TR-0046C | TR-0046D

TIMBER 12,5



Rope for tree operations, excellent abrasion resistance and high load handling capacity. It has a 12.5mm diameter and 39kN resistance.

TR-0047A | TR-0047B
TR-0047C | TR-0047D

TIMBER 15



Rope for descending branches, trunks and trees, due to its high nominal load capacity of 61kN, and has excellent control during descent handling.

TA-0023
PRO TECTOR ROPE



Rope protector to protect against abrasion or cutting points in vertical operations involving ropes of different diameters. Made of mobile synthetic material and three robust high-tenacity polyester tapes. Weight: 190g

TR-0009
CORDIM LINE 100



Developed for perfect launch, control and confidence in tree operations. Cord produced in Europe. Monochromatic product. Its composition is 100% polyester. Breaking load of 1kN (100kgf). 100 meters long.

TL-0075
TITAN




The TITAN rescue knife has 4 essential functions: standard cutting, cutting rope, tape or seat belt, tip for breaking glass and saw for cutting windshields. Weight: 220g

TL-0032
CUTT



Rope and cord cutter in the shape of pliers. For ropes up to 13mm in diameter. Weight: 100g

MANUAL DESCENDERS

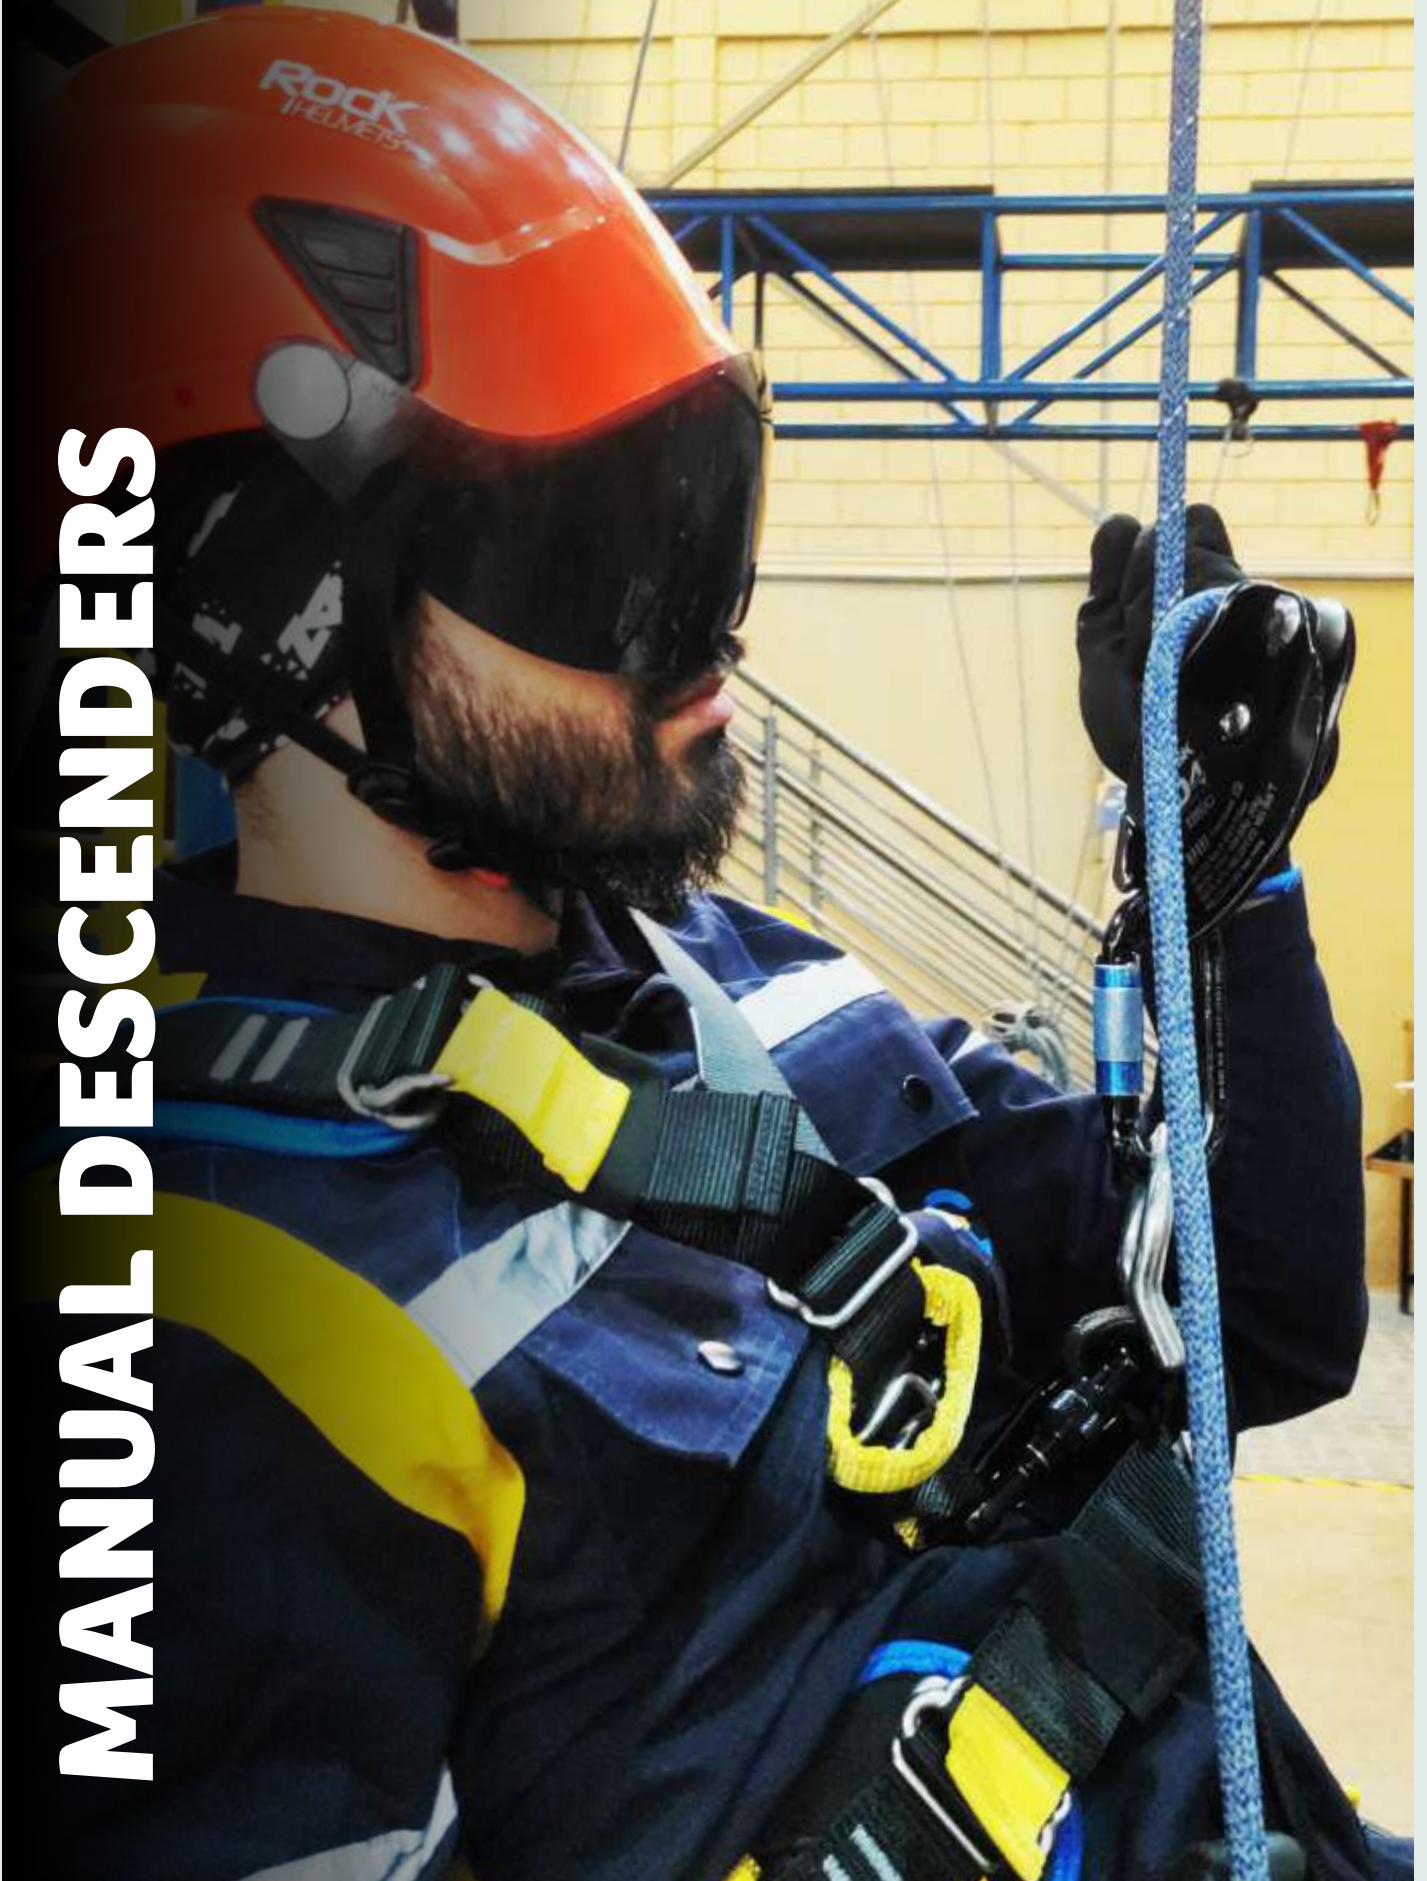

MANUAL DESCENDERS



TD-0008

LOV3

The LOV3 is a multifunctional device, self-locking descender, safety device, braking device and a rescue descender, developed by specialist technicians, intended for use by trained and qualified professionals for rope access and technical rescue activities, in accordance with European standard EN12841:2006 types A, B and C.

Load capacity: 120kg

Weight: 430g



RP-880B

D4

Manual descender, made of high-strength aluminum, with stainless steel components. Equipped with a single innovative lever that offers precise control at low and high speeds, with an anti-panic system. Its lever is designed to rotate 360°, making its use easier and more intuitive. For ropes with a diameter of 10.5 to 11.5 mm.

Working load: 240kg

Weight: 810g



RP-881

D4 PRO

The D4 PRO is a super-resistant descender. Equipped with a single innovative lever that offers precise control at low and high speeds, without panic lock. It can be used for rescue due to its high working load limit. You can hear clicks when turning the lever, which makes it easier to know the correct position. Ideal for rescue techniques where a qualified professional must operate it. For ropes with a diameter of 10.5 to 11.5mm.

Working load: 240kg

Weight: 930g



RP-885B

D5

Manual descender, built in high-strength aluminum, with stainless steel components, the D5 is a super-resistant descender. Equipped with a single innovative lever that offers precise control at low and high speeds, with an anti-panic system. For ropes with a diameter of 11.5 to 13mm.

Working load: 240kg

Weight: 990g



TD-0006

AUTOBLOCK

Lightweight and versatile descender, this is an extremely technical piece of equipment for use in urban, industrial and mountaineering operations. For ropes with a diameter of 9 to 13mm.

Working load: 120kg

Weight: 350g



TD-0003

SUPER EIGHT LIGHT

Figure 8 descender, made of high-strength aluminum. Its lugged shape prevents accidental snagging during rescue operations. For ropes with a diameter of 8 to 16mm.

Resistance: 40kN

Weight: 296g



TD-0016

SUPER EIGHT

Figure-of-eight descender made of high-strength steel. Its lugged shape prevents accidental snagging during rescue operations. For ropes with a diameter of 8 to 16mm.

Resistance: 50kN

Weight: 290g



TD-0015

EIGHT


Figure 8 descender made of high-strength aluminum. This is a classic piece of equipment, known as a braking mechanism. For ropes with a diameter of 8 to 16mm.

Resistance: 30kN

Weight: 120g



LIFTS AND BLOCKERS

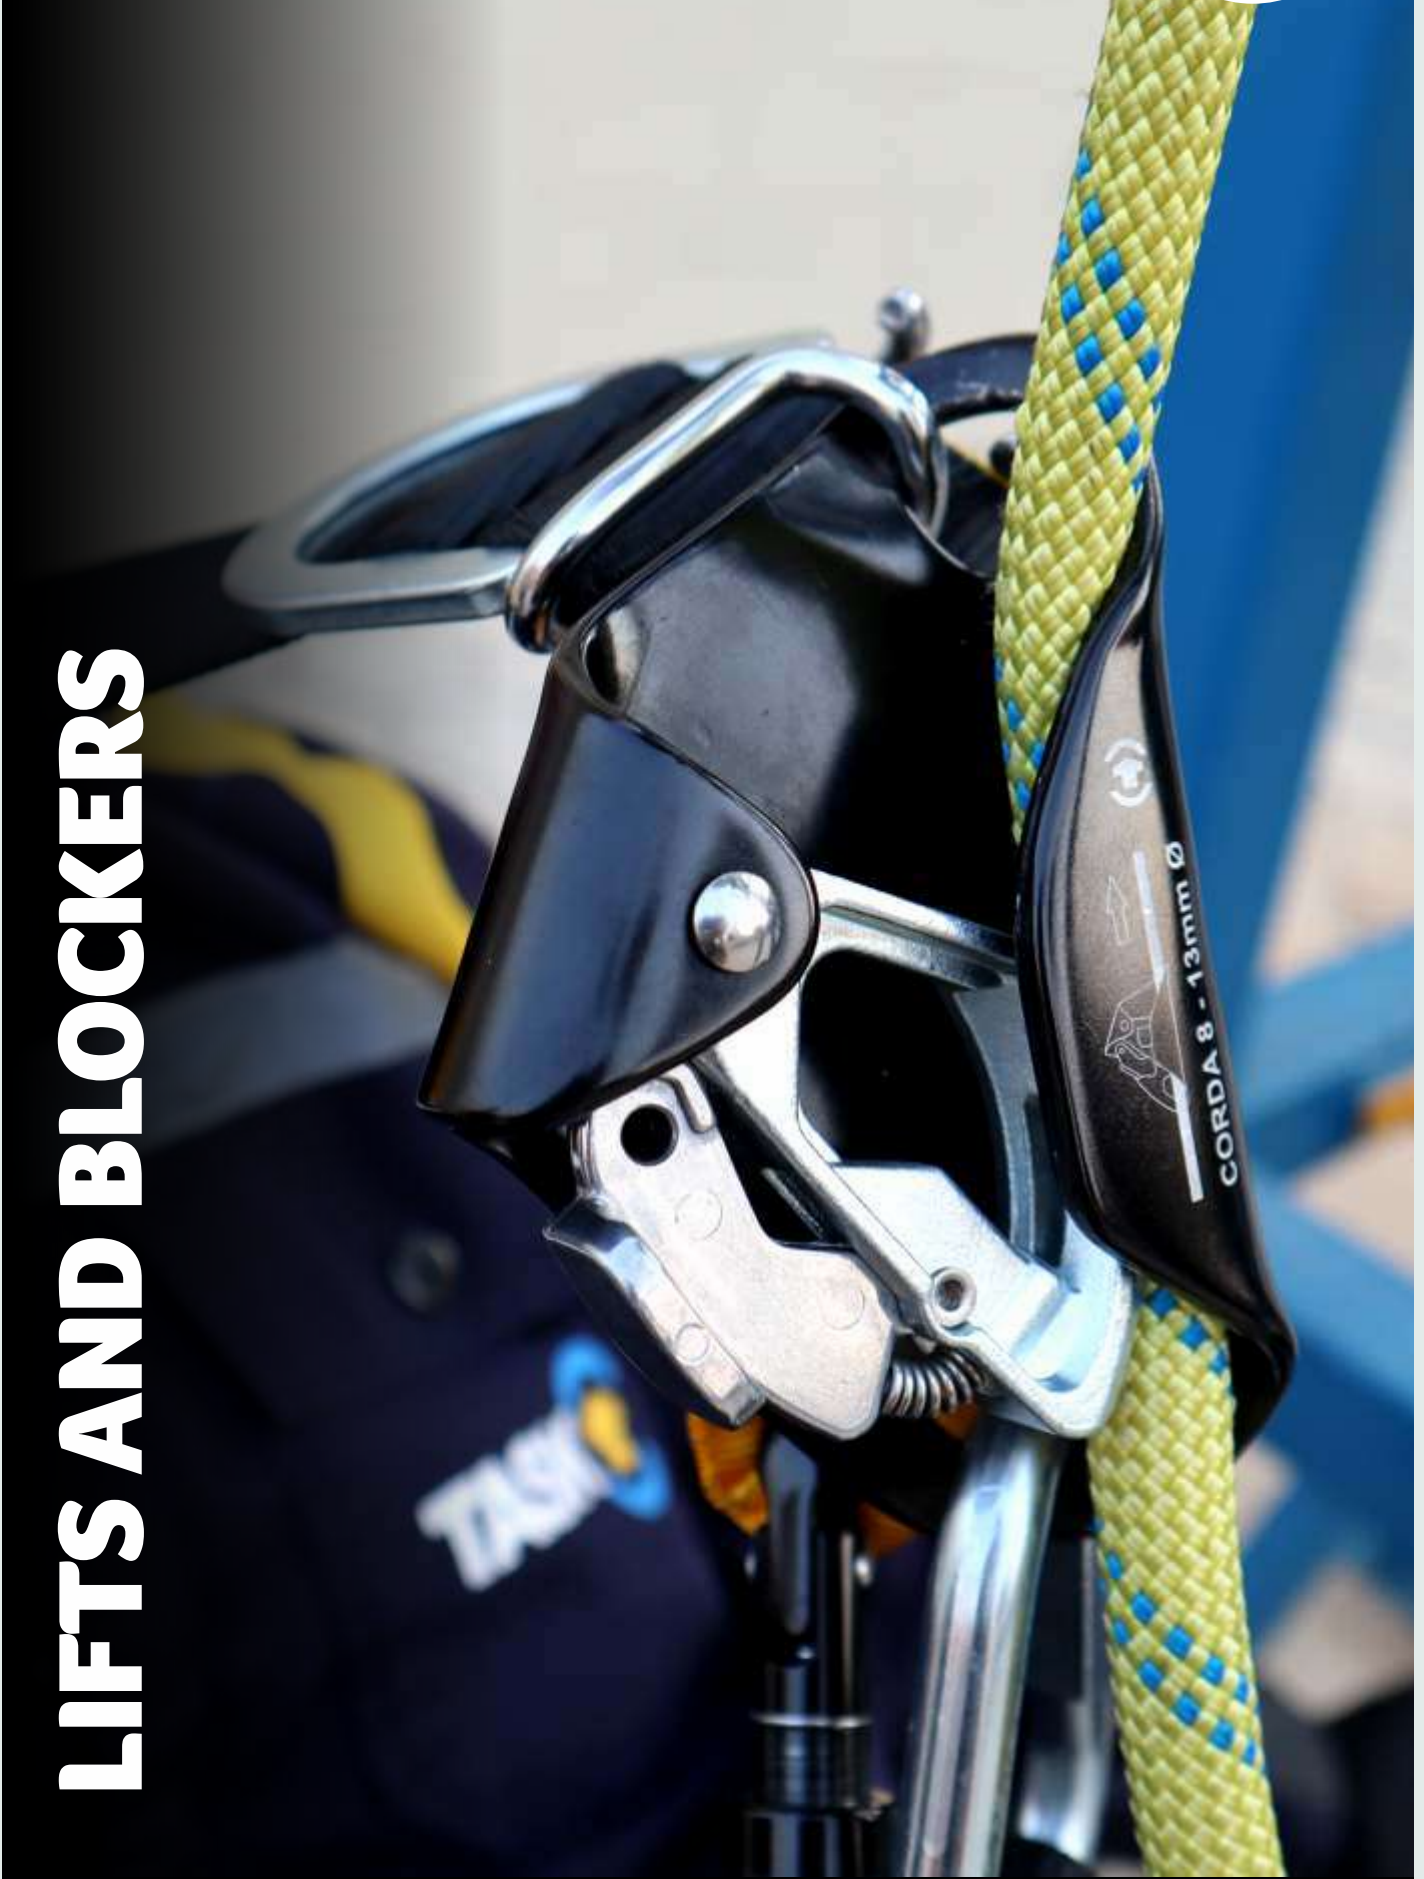

LIFTS AND BLOCKERS



TB-0001 | TB-0003 HIGHWAY

Hand-held ascender/blocker with handle, used for ascent/progression. Simple to use and effective, it has a molded handle ensuring ergonomics and a comfortable grip.

It has a jaw-blocking device (toothed) and has two holes located on its lower part, facilitating connection to the belt, a larger hole and the pedal or stirrup in the smaller hole. For ropes with a diameter of 8 to 13mm

Weight: 0.236kg

Available for left-handed and right-handed users.

Working load: 120kg

TB-0005 QUICK UP



Chest blocker, made of high-strength aluminum, used for rope progression. For ropes with a diameter of 8 to 13mm.

Working load: 120kg
Weight: 166g

TB-0015 ROPE GRAB II



Mechanical lock, which acts independently, leaving your hands free, due to its locking system. For ropes with a diameter of 9 to 13mm.

Working load: 120kg
Weight: 182g

TB-0004 ZAP



Hand blocker, without handle. Used for ascent/progression. Simple to use and effective. For ropes with a diameter of 8 to 13mm.

Working load: 120kg
Weight: 158g

RP-228 | RP-227 STRYDER



Foot blocker, made of stainless steel with connector that allows fixed coupling to the rope. For ropes with a diameter of 8 to 13mm.

Working load: 140kg
Weight: 240g

AUTOMATIC DESCENDERS



AUTOMATIC DESCENDERS

AUTOMATIC DESCENDERS



UNIDRIVE

TD-0027 | TD-0028 | TD-0029
TD-0036 | TD-0030 | TD-0037 | TD-0031

Options:

TD-0027 – 15m
TD-0028 – 30m
TD-0029 – 50m
TD-0036 – 80m
TD-0030 – 100m

Mittelmann
Sicherheitstechnik

Technology that saves lives



Automatic ascender/descender with centrifugal braking system for heights of up to 160m, ensuring a continuous descent speed of 0.8m/s. It has two hooks that can be used to increase friction, facilitating descent with more weight. It can be used by up to two people (maximum weight of 200kg). It has a 10.5mm rope with measurements ranging from 15 to 160m. It has 3 T-type aluminum connectors with a 25mm opening, two of which are sewn into the ends of the rope and one attached to the body of the equipment. It has an extendable 1/2" ratchet wrench with a length of 305 to 445mm, which allows the equipment to be used as an ascender. It also has a 3/8" adapter for an electric screwdriver, which allows for faster ascents. It has an exclusive ratchet system that frees the user's hands. The pulley and braking area are made of stainless steel, increasing the durability of the equipment. Comes with a 10.5mm diameter rope + a 1m long I-SLING anchor strap + a backpack for carrying the rope. The 15 to 50 meter rope kits come with a 20 liter backpack. The 80 to 160 meter rope kits come with a 37 liter backpack. UNIDRIVE is certified according to European directive (EU) 2016/425 in standards EN 341:2011 (1A/1B) and EN 1496:2006/B.

Weight: from 5,300kg

AUTOMATIC DESCENDERS



MRG9 EASY

TD-0040 | TD-0041 | TD-0042 | TD-0043
TD-0044 | TD-0045 | TD-0046

Options:

TD-0040 - 15 meters
TD-0041 - 30 meters
TD-0042 - 50 meters
TD-0043 - 80 meters
TD-0044 - 100 meters
TD-0045 - 120 meters
TD-0046 - 160 meters

Mittelmann
Sicherheitstechnik
Technology that saves lives



The MRG9 EASY is an automatic descender, a compact descent, abandonment and rescue device with a handwheel. The handwheel allows the victim to be raised quickly in rescue situations, such as to release the victim's weight from the lanyard and lower the victim safely, at an automatically controlled speed. Made of stainless steel and aluminum, it can descend from heights of up to 160 meters. Speed control is performed by means of a centrifugal brake. It has a handwheel, which allows the lifting of loads of up to 140 kg, to a maximum height of 30 meters. The MRG9-EASY has an auxiliary brake hook. With EN 1891 Type A certified ropes, with diameters of 10.5 mm. The swivel (anti-rotation) in the device prevents the system from twisting during the maneuver. The rope ends have electronic stitching with T-type aluminum connectors with automatic locking and 25 mm opening incorporated. Comes with a 10.5m diameter rope + a 1.00m long I-SLING anchor strap + a backpack for carrying the rope. The 15 to 50m rope kit comes with a 20 litre backpack. The 80 to 160m rope kit comes with a 37 litre backpack. The MRG9-EASY is certified in accordance with European Directive (EU) 2016/425 in standards EN 341:2011 (1A/1B) and EN 1496:2017/B.


Weight: from 3.8kg



BAGS AND BACKPACKS



BAGS



INSERT 34L

TL-0076 | TL-0077



Backpack suitable for use as a storage accessory for equipment for working at height and rescue operations, with a capacity of 34 liters.
Rope capacity: up to 100 meters
Weight: 694g

INSERT 52L

TL-0078 | TL-0079



Backpack suitable for use as an accessory for storing equipment for working at height and rescue operations, with a capacity of 52 liters.
Rope capacity: up to 200 meters
Weight: 734g

STANK 37L

TL-0080 | TL-0081



Backpack designed for transporting equipment, offering practicality and comfort for carrying whatever is necessary. Waterproof product with a capacity of 37 liters.
Rope capacity: up to 160 meters
Weight: 716g

STANK 20L

TL-0102 | TL-0103



Backpack designed for transporting equipment, offering practicality and comfort for carrying whatever is necessary. Waterproof product with a capacity of 20 liters.
Rope capacity: up to 60 meters
Weight: 475g

INSERT 98

TL-0104

INSERT 98 carrying bag, designed for carrying sports or work equipment. Accessory made of high-resistance PVC material, with a zipper on the top with full opening, making it easy to put and take out items inside, shoulder strap and two side handles with tubular tape reinforcement. It has four internal pockets to store objects separate from other loads.
Capacity: 25kg
Weight: 2.130kg




HEADLAMPS



HEADLAMPS

HEADLAMPS



VERSA HEADLAMP

TL-0067 | TL-0068

Compact, powerful and very versatile headlamp. It works as a proximity and mobility headlamp. Lightweight and resistant, this model is recommended for professionals looking for versatility in their functions and also for leisure.

With 2 red LEDs and 1 super powerful white LED, this headlamp offers 4 different light modes and good range. It is resistant to rain and water splashes (IPX-4), has an easy-to-adjust elastic strap and resistance, and can adjust the focus angle. It can be used on helmets or directly on the head. It can also be used as a handheld flashlight or fixed to surfaces with self-adhesive tape. It weighs only 40g (without batteries). This flashlight is recommended for those looking for versatility and ease of use.



TYPE OF FOOD
3A
3 batteries


Autonomy: 20h
Range: 55m
Lumens: 90
Weight: 0.085kg



WEIGHT
No batteries
40g



HEADLAMPS



HEADLAMP PERSONAL TL-0069 | TL-0070



It's your companion at all times! Very compact and very light, it combines great autonomy and good performance in a small and powerful personal headlamp. Its small size makes it easy to store and use, and makes the headlamp very light and attractively designed.

It has 2 white LEDs and 1 red LED in two different modes. This model is recommended as a personal headlamp, for proximity, reading, professional services and leisure. It is water resistant to 100 liters of water for up to 30 minutes (IPX-6), has an elastic strap that is easy to adjust and is strong, and has an adjustable focus angle. It can be used on helmets or directly on the head. It can also be used as a handheld headlamp or fixed to surfaces with self-adhesive tape. It weighs only 45g (without batteries). This headlamp is the right choice for long durations and practicality.



TYPE OF FOOD

3A
2 batteries

Autonomy: 120h
Range: 25m
Lumens: 40
Weight: 0.070kg



WEIGHT

No batteries
45g

HEADLAMP INTENSE TL-0071

The INTENSE headlamp is proof that performance and versatility can go hand in hand. This model is capable of offering a lot of power, autonomy and versatility in a single professional headlamp. With a powerful centralized LED and many functions, the INTENSE is recommended for proximity, mobility and distance lighting.

Its bravery goes further, also with water resistance under immersion of up to 1 meter, for 30 minutes (IPX-7). With an easy-to-adjust and resistant elastic strap, focus angle adjustment, mobile diffuser for lighting and S.O.S. function (activated by long pressing the button). It also has an emergency whistle. It can be used on helmets or directly on the head. It can also be used as a handheld headlamp or fixed to surfaces with self-adhesive tapes. It weighs only 120g (without batteries). This headlamp is the most complete lighting option for professionals and adventurers.



TYPE OF FOOD

2A
3 batteries


Autonomy: 100h
Range: 80m
Lumens: 280
Weight: 0.130kg



WEIGHT

No batteries
120g

HELMETS

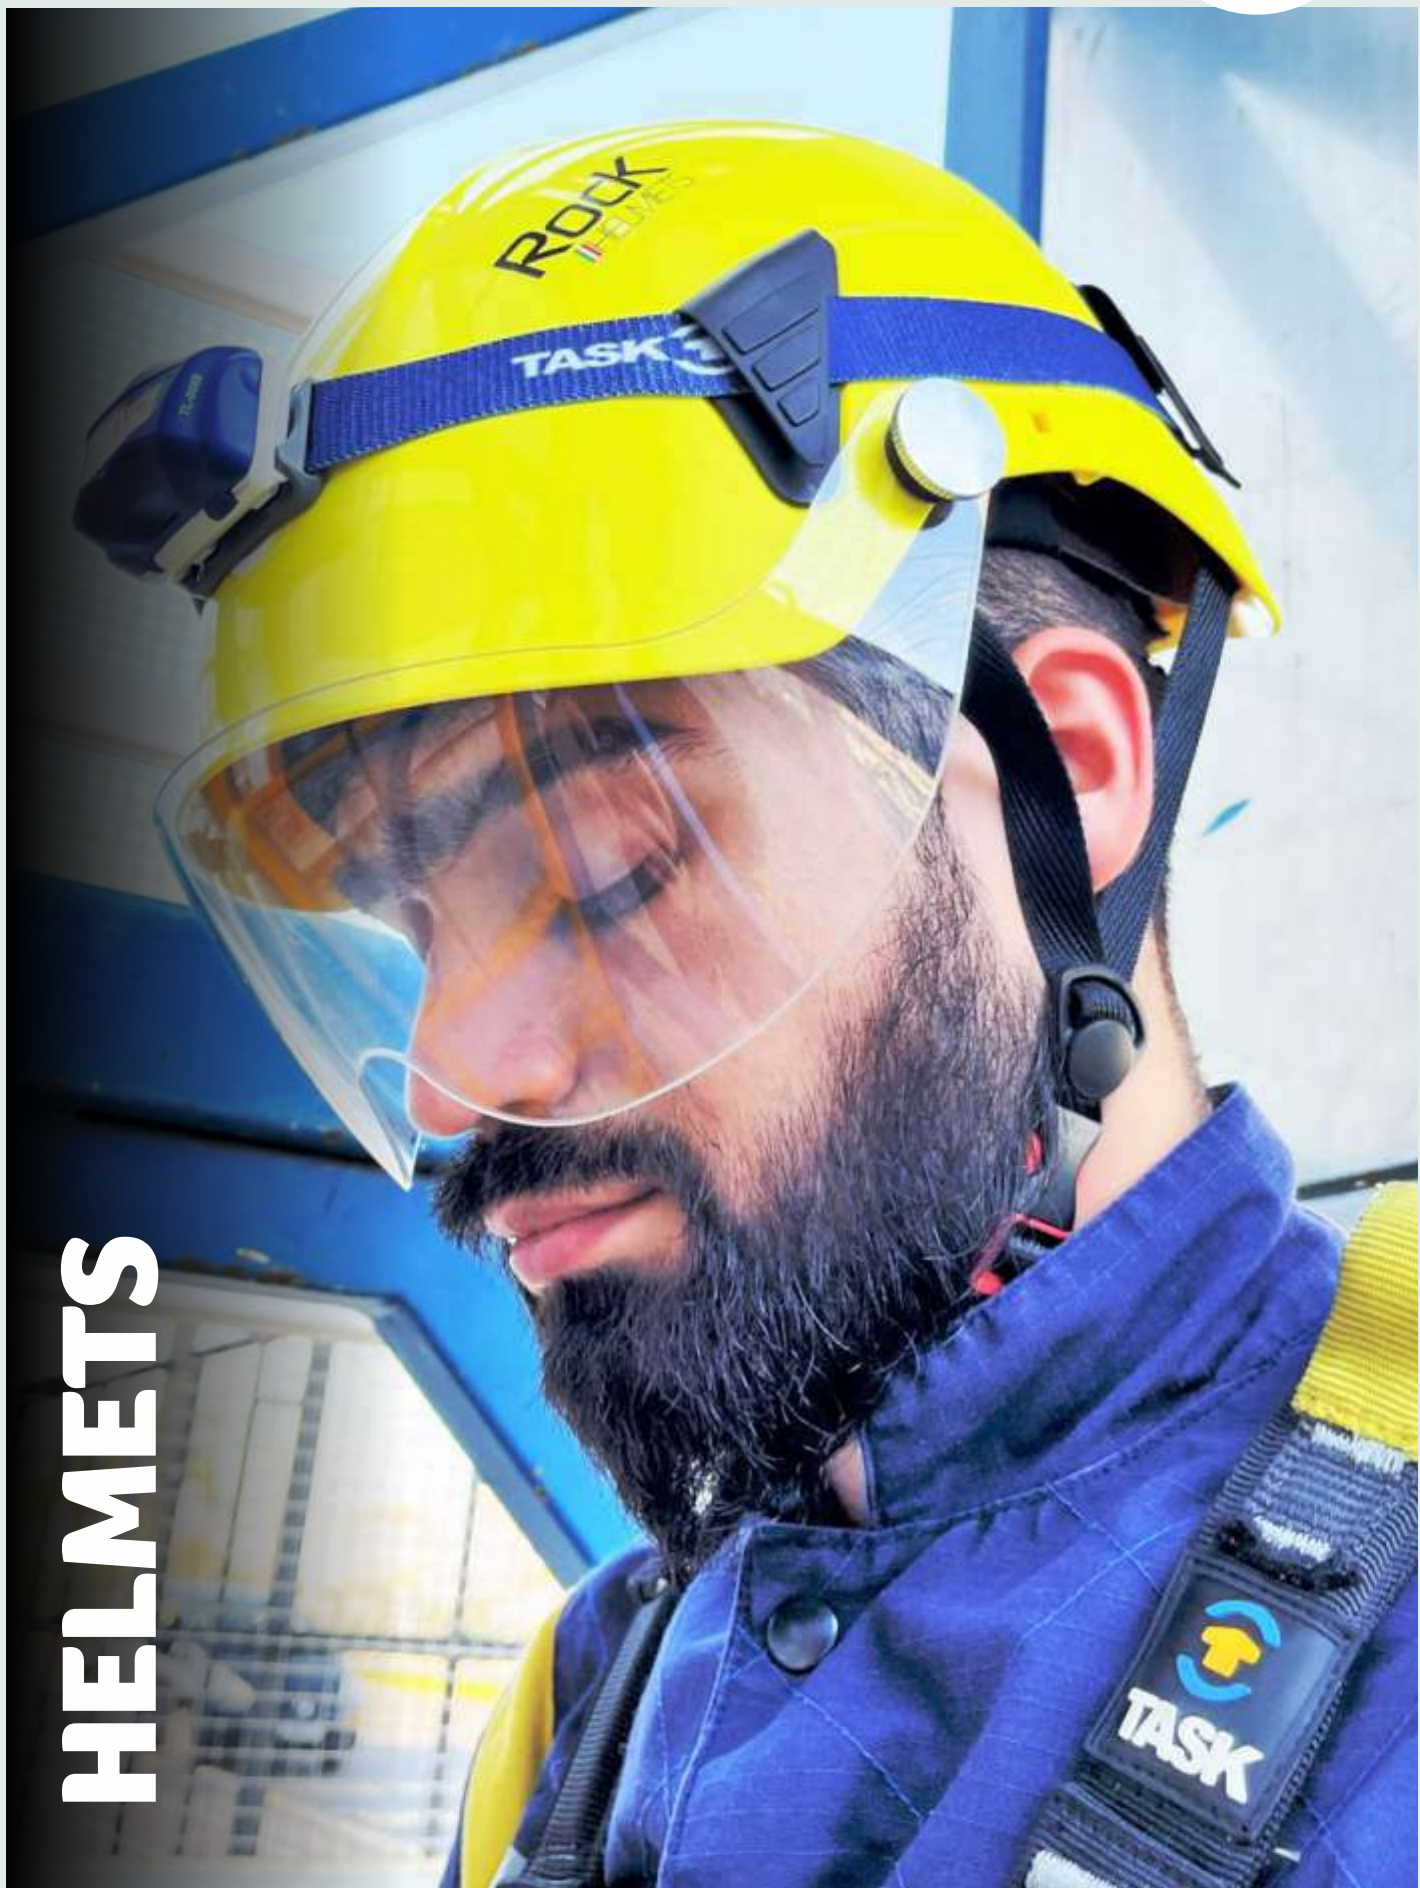

HELMETS

HELMETS



ROCK HELMET SMALL VISOR



ROCK is an extremely versatile helmet for working at heights, rope access, vertical technical rescue and tree climbing. It is lightweight and durable. Made in Italy, it has cutting-edge technology.

In addition to having an incredible design, the external structure made of ABS and the internal structure made of EPS ensure maximum comfort and safety for its users. The ROCK helmet has removable internal fabric, making it easy to clean when necessary.

It has side slots for attaching a visor and side slots for attaching shell-type mufflers with snap-on rods, compatible with the models of ear protectors found on the national market. Its chin strap is adjustable and removable, in addition to having side clips for using a headlamp.

Its adjustment allows the helmet to be adjusted to sizes ranging from 55 to 63cm.

Standards: Complies with NBR 8221:2003
Certification: ANSI Z89.1: 2009 and CE EN 12492
Construction material: External structure made of ABS and internal structure made of polystyrene (EPS)
Type: 1
Class: C
Weight: 580g

SMALL CLEAN



SMALL TONED

COLORS

FLUORESCENT YELLOW

ROCK TL-0109
ROCK SMALL CLEAN TL-0127
ROCK SMALL TONED TL-0128

RED

ROCK TL-0108
ROCK SMALL CLEAN TL-0124
ROCK SMALL TONED TL-0125



FLUORESCENT ORANGE

ROCK TL-0110
ROCK SMALL CLEAN TL-0130
ROCK SMALL TONED TL-0131

WHITE

ROCK TL-0107
ROCK SMALL CLEAN TL-0121
ROCK SMALL TONED TL-0122



HELMETS



ROCK LARGE VISION HELMET



COLORS

FLUORESCENT YELLOW

TL-0129

WHITE

TL-0123



RED

TL-0126



FLUORESCENT ORANGE

TL-0132



Standards: Complies with NBR 8221:2003

Certification: ANSI Z89.1: 2009 and CE EN 12492

Construction material: External structure made of ABS and internal structure made of polystyrene (EPS)

HELMETS



VISOR SMALL CLEAN VISOR
TL-0111



Short transparent protective visor for ROCK helmets, provides total safety for the eyes while in activity. Protection against optical radiation, ultraviolet filter. Optical class: 1 (prolonged use).
Weight: 80g

VISOR SMALL TONED VISOR
TL-0112



Short smoked protective visor for ROCK helmets, total safety for your eyes while riding. Protection against optical radiation, ultraviolet filter, optical class: 1 (prolonged use), protection against high-speed particles (medium impact energy).
Weight: 80g

VISOR LARGE CLEAN VISOR
TL-0117



Long transparent protective visor for ROCK helmets, total safety for the eyes while in action. Protection against optical radiation, ultraviolet filter, optical class: 1 (prolonged use), protection against high-speed particles (medium impact energy).
Weight: 90g

FOCUS
TL-0007 | TL-0006 | TL-0005



Personal protective equipment for work between temperatures of -19° and 49°. Made of ABS and with UV treatment, it is lightweight, comfortable, has anti-allergy tapes, padded headband, flashlight holders and visor slot, ear protector and neck protector slot. Class: A. Type: 3.
C.A.: 14816
Weight: 495g

FOCUS ELETRO
TL-0008



Adjustable and resistant helmet for vertical work and rescues in electrical areas. Polyester straps, polypropylene shell. It was developed to protect workers from energized activities or with risk of splashing chemical or incandescent products, between temperatures of -19° and 49°. Class: B. Type: 3.
C.A.: 17098
Weight: 504g

ARES
TL-0019




ARES helmet, class A, type III, without brim, for technical work and rescues. It has a flashlight holder and a face and ear protector holder. It also has a side ventilation system and size adjustment via ratchet. Class: A. Type: 3.
W.C.: 32260
Weight: 465g

SHEEP (FOCUS)
TL-0009



Suitable for suspending the helmet on the user's head and cushioning impacts. For FOCUS helmets.
Weight: 100g

GLOVES



GLOVES



TL-0084 (P) | TL-0085 (M) | TL-0086 (G)

THOR

Accessory with reinforcement on the palm of the hands and along the fingers, providing protection to the user when handling ropes, tools, sharp materials, among other equipment.

Weight: 100g



TL-0088 (M) | TL-0089 (G)

THOR 3/4

THOR 3/4 safety gloves, made of high-strength natural goat leather, with reinforcement on the palms and along the fingers.

Weight: 85g



TL - 0095 (G) | TL - 0101 (G Blue)

THOR LIGHT 3/4

THOR LIGHT 3/4 gloves with lightweight and highly durable fabric, developed with 91% polyamide, with ventilation and 9% elastane, which offer the best fit on the hands.


Weight: 70g

ACCESSORIES AND COMPONENTS



ACCESSORIES AND COMPONENTS

ACCESSORIES AND COMPONENTS



TC-0006
SUSPENSOR II



Suspension for lifting people, stretchers, loads or animals in confined spaces and/or at heights with different levels. Includes 3 BULLET Z AUTO connectors. Capacity: 500kg
Weight: 1,403kg

TL-0033
SCAPE STE



Evacuation diaper with six anchor points. With 45mm straps and electronic seams. It also has quick buckle adjustments on the shoulders and hips. For rescue in confined spaces, towers in general, ladders and cable cars. Capacity: 150kg
Weight: 1,150kg

TL-0020
HORUS



Suspension seat with internal structure in fiberglass with polyester resin, coated with EVA, canvas and aerated fabric to provide greater comfort to the user. 44mm straps with height adjustment by means of stainless steel buckles and material and tool holders on both sides. Capacity: 150kg
Weight: 1.4kg

TB-0009
FOOTSTEP



Pedal (footloop) for climbing ropes, made of high-strength polyester with 20mm thickness, internal protection, electronic seams and 6mm cord with length adjustment buckle. Recommended for use connected to the hand blocker.
Weight: 100g

TB-0030
KIT ARP



Double parallel and adjustable emergency pedal housed in an airy bag with velcro closure, made of flat tape. Light and compact, the ARP can be carried with the equipment holder on the belt, always within reach.
Weight: 250g

TA-0017 | TA-0042
STEP



Flexible ladder made with high-strength 20mm polyester tape. Ideal for accessing difficult places, rope access and progression. Available with 6 or 4 steps. Has an upper attachment point.
Weight:

6 steps - 350g
4 steps - 300g

TL-0075
TITAN




The TITAN rescue knife has 4 essential functions for all professionals in the field: common cutting, cutting rope, tape or safety belts, tip for breaking glass and saw for cutting windshields.
Weight: 220g

TL-0032
CUTT



Rope and cord cutter in the shape of pliers. For ropes up to 13mm in diameter.
Weight: 100g

ACCESSORIES AND COMPONENTS



TA-0023
PRO TECTOR
ROPE



Rope protector to protect against abrasion or cutting points during vertical operations. Made of flexible synthetic material and three robust high-tenacity polyester tapes.
Weight: 190g

TA-0016
PEIA



Foot-operated removal system made of ultra-resistant 47mm tape with electronic seams. Ideal for use in rescues in confined spaces.
Weight: 80g
Weight: 1.150kg

TX-0006
STABLE



Tripod stabilization tape set, with a ratchet system that allows the stabilization of the tapes. Constructed of 44mm polyester tape with electronic seams. For use of the tripod in fishing and in places where stabilization is difficult.
Weight: 220g

TB-0016
HUG



Ring of cord, suitable for use in assembling blocking knots, has a thickness of 6 mm and two different dimensions, 45 cm and 70 cm.
Weight: 33g

TA-0062
LINK TAPE



LINK TAPE is the textile connection between rescuer and victim in technical rescue operations (flexible connecting chain). Three sewn polyester tapes measuring 15mm wide and 10cm long.
Resistance: 25KN
Weight: 0.020kg

TC-0135
RAM



Kit with 3 accessories, material holder, in three sizes: 39cm (5 eyelets + manhole), 28cm (5 eyelets + manhole) and 15cm (3 eyelets + one eyelet for fixing).
Weight: 0.058kg

TC-0131
RAM SPECIAL



Kit with 3 accessories, material holder, in three sizes: 39cm (5 eyelets + eyelet), 28cm (5 eyelets + eyelet) and 15cm (3 eyelets + one eyelet for fixing), comes with an aluminum carabiner with triple lock MASTER D TRIPLE.
Weight: 0.140kg

TL-0052
YOYO



Elastic safety system to prevent tools from falling during operations at height, avoiding accidents and losses, with the Dual System and exclusive connector coupling at the end.
Weight: 100g

ACCESSORIES AND COMPONENTS



TC-0118
REACTOR 200



Lanyard attachment extender, made of 25mm wide flat polyester tape with a protective layer of tubular tape. With 10mm TRIANGLE (35kN) for connection to the MGO lanyard.
Resistance: 22kN
Length: 0.60m
Weight: 250g

RIN-0010 SMALL ALUMINIUM RING
RIN-0011 LARGE ALUMINIUM RING
RIN-0013 LARGE STEEL RING



Aluminum ring for arboriculture activities.
Weight: 155g



Aluminum ring for arboriculture activities.
Weight: 165g



Steel ring for arboriculture activities.
Weight: 250g

RIN-0012
SMALL STEEL RING



Steel ring for arboriculture activities.
Weight: 200g

TR-0013 | TR-0014
NOTE KIT



String marking kit consisting of 10 identification labels and 10 heat shrinkable strips for attaching the labels to the end of the string. For strings measuring 9.5 to 10.5mm or 11 to 13mm.



VISIT THE WEBSITE

ARBORICULTURE



HARNESSES LANYARDS FALL ARRESTERS ANCHORS CONNECTORS STRETCHERS TRIPODS PRE-ENGINEERING PULLEYS ROPES MANUAL DESCENDERS AUTOMATIC DESCENDERS BACKPACKS FLASHLIGHTS HELMETS GLOVES ACCESSORIES TREES KITS THE COMPANY TRAINING SERVICES



RP-285A1

APEX



The APEX builds on the performance characteristics of the original rope wrench, offering additional functionality and convenience, along with unmatched ISC build quality. Mechanical and automatic system with 4 friction settings.

Rope size: 11 to 13mm diameter

Working load: 120kg

Weight: 177g

RP-280

ROPE WRENCH



Accessory developed and patented by ISC for tree operations. The ROPE WRENCH achieves friction performance on ropes up to 11mm. Item to be used in conjunction with an extender.

Capacity: 24kN

Weight: 220g

RT-300A2

SQUIRREL 310MM



Extender constructed with high quality kernmantle rope, includes an injected polymer piece with an ultra premium finish, which allows flexibility for tree climbing operations. Breaking load: 24kN Weight: 115g (including ISC carabiner)

RT-305A1

SQUIRREL 225MM



Extender constructed with high quality kernmantle rope, includes an injected polymer piece with an ultra premium finish, which allows flexibility for tree climbing operations. Breaking load: 24kN Weight: 105g (including ISC carabiner)



TR-0054
DOUBLE
EXTENSOR



Accessory developed and patented by ISC for tree operations. The ROPE WRENCH achieves friction performance on ropes up to 11mm. Item to be used in conjunction with an extender.
Capacity: 24kN

RP-282
PHLOTICH
PULLEY



Multi-opening device specifically designed for SRT and DDRT. The new PHLOTICH pulley is available with bushings or bearings. For ropes up to 13mm. Maximum working load: 40KN.
Weight: 150g

TR-0051
P8 PRUSSIK



PRUSSIK EIGHT TECHNORA TASK BY TENDON cord with 8mm diameter and 90cm length, with eyelet sewn on the ends. Made of aramid, it is much more resistant to heat and abrasion.

TR-0052
P10 PRUSSIK



PRUSSIK TEN TECHNORA TASK BY TENDON cord with 10mm diameter and 90cm length, with eyelet sewn on the ends. Made of aramid, it is much more resistant to heat and abrasion.

TT-0001
SPACE-X



Drop-shaped throwing weight. Two-tone for better visualization. Cordura 1000 textile composition, tubular synthetic tape, and steel.

Static test resistance: 1000kgftraction
Throwing test: 3,000
Weights: 250g, 300g, 350g and 400g

TT-0003
MAGIC CUBE



Easy-to-carry triangle that can be converted into a storage cube. It has a double bottom, allowing the use of materials for two simultaneous operations and internal organizing handles for both operations. With Cordura 1000, tubular synthetic tape, fiberglass and steel.

TT-0010
RINGS DOUBLE
LINK



Tape with cover and core and metal eyelets. Different sizes of metal eyelets allow for quick and easy installation and removal of the device in its various operations.
Length: 1.20
Resistance: 25kN
Weight: 130g

TR-0046A | TR-0046B
TR-0046C | TR-0046D
TIMBER 12,5MM



Its composition is a combination of polyamide and polyester that provides a unique characteristic for tree operations.

Resistance: 39kN



TR-0047A | TR-0047B
TR-0047C | TR-0047D
TIMBER 15MM



Excellent for descending branches, trunks and trees, due to its high nominal load capacity of 61kN, and has excellent control during descent handling.

RP-048A1
COMPACT
RIGGING PULLEY



Compact pulley designed to work (in conjunction with textiles) to absorb the enormous forces created by the harsh dynamics of heavy arborist work.
Minimum breaking load: 85kN
Weight: 490g

RP-050
CAST
RIGGING PULLEY



Pulley designed to work (in conjunction with textiles) to absorb the enormous forces created by the harsh dynamics of heavy arborist work.
Minimum breaking load: 100kN
Weight: 1.6kg

RP-051A1
RIGGING PULLEY



Pulley designed to work (in conjunction with textiles) to absorb the enormous forces created by the harsh dynamics of heavy arborist work.
Minimum breaking load: 100kN
Weight: 1.6kg

LK101A.2
ULTRALINK



Pulley for moving, redirecting and retrieving ropes in tree operations. Designed with safety and efficiency in mind, it offers a removable pulley and captive shaft, providing additional versatility and efficiency in day-to-day operations.
Weight: 182g

KIT-005
KIT ROPE
WRENCH



Arboriculture kit.
RP-280-ROPEWRENCH
TR-0054 - DOUBLE EXTENSOR
TR-0052 - P10 PRUSSIK TECHNORA
RP-282-PHLOTICH PULLEY
TM-0054 - AUTO BULLET ALUMINUM DOUBLE LOCK

KIT-1
ROPE WRENCH
+ EXTENSOR



Kit with ROPE WRENCH device and DOUBLE EXTENSOR extender.

KIT-018
KIT ROPE WRENCH



Arboriculture kit.
RP-280-ROPEWRENCH
TR-0054 - DOUBLE EXTENSOR
TR-0052 - P10 PRUSSIK TECHNORA
TP-0062-SINGLE LIGHT
TM-0054 - BULLET AUTO ALUMINUM DOUBLE LOCK

ARBORICULTURE



TP-0062 | TP-0063
SINGLE LIGHT



Compact and simple pulley with movable plates, made of high-resistance aluminum, with exclusive SPID bearing, for ropes up to 13mm.

Maximum working load: 36kN
Weight: 130g

RP-228 | RP-227
STRYDER



Foot blocker, made of stainless steel with connector that allows fixed coupling to the rope. For ropes with a diameter of 8 to 13mm.
Working load: 140kg
Weight: 240g

TR-0009
LINE 100



Developed for perfect launch, control and confidence in tree operations. Cord produced in Europe. Monochromatic product. Its composition is 100% polyester. Breaking load of 1kN (100kgf). 100 meters long.

TC-0028
TAIL 5 RGH



Positioning lanyard with 5m length, 11mm diameter and 40.5kN resistance, rope produced in Europe. With hook carabiner, fixed ROPE GRAB blocker and oval carabiner. Its composition is 100% polyamide.

TC-0027
TAIL 5 H



Positioning lanyard with 5m length, 11mm diameter and 40.5kN resistance, rope produced in Europe. With carabiner hook. Nominal capacity of 22kN and 27mm opening. Its composition is 100% polyamide.

TC-0021
TAIL 5



Positioning lanyard measuring 5m in length, with a diameter of 11mm and a resistance of 40.5kN. Rope produced in Europe. Its composition is 100% polyamide.

TT-0013
LINE 50 DYNEEMA



Cord with unique features for arborists: strength, durability, control, low elasticity and lightness. High-tech line, ultra-strong polyethylene fiber, 15 times stronger than steel. Capable of supporting loads without deforming or breaking. Diameter of 1.77mm. High tensile strength 2.5kN (255kg)



VISIT THE WEBSITE



X-TREME ARB

TC-0031ARB | TC-0029ARB | TC-0030ARB

CA: 38495

Capacity: 150kg

Weight: S - 2,600kg | ML - 2,700kg | XL - 2,800kg

8 stainless steel adjustment buckles

Double padding provides comfort

Connector with Keylock system

8 aluminum anchor points

Double and high padding (23cm) on the lumbar

FIT FIX® for ventral blocker connection

Adjustable bridge with metal point for movements

6 material holders with a capacity of 10kg each

Backpack holder with 20kg capacity

With 7 connection points in noble metal materials (stainless steel and/or aluminum), being 1 circular aluminum ring (bridge), 2 for fall arrest, 2 for positioning, 1 ventral and 1 for movement restriction (textile). It has double and high padding, with 23 cm in the lumbar region. It was developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long operations. It has an exclusive AC® system, patented, double cylindrical bar buckle, with stainless steel angled crown, on both sides. Specially developed for vertical operations in trees, as well as technical rescue, rope access, evacuation, positioning, work at height and confined spaces, it has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, 1 central backpack holder, carabiner with Keylock system and FIT FIX® System for easy connection of the ventral blocker, it has 8 adjustment buckles.




X-TREME ARB SIT

TC-0143ARB | TC-0141ARB | TC-0142ARB


Capacity: 150kg

Weight: S - 1,800kg | ML - 1,900kg | XL - 2,000kg

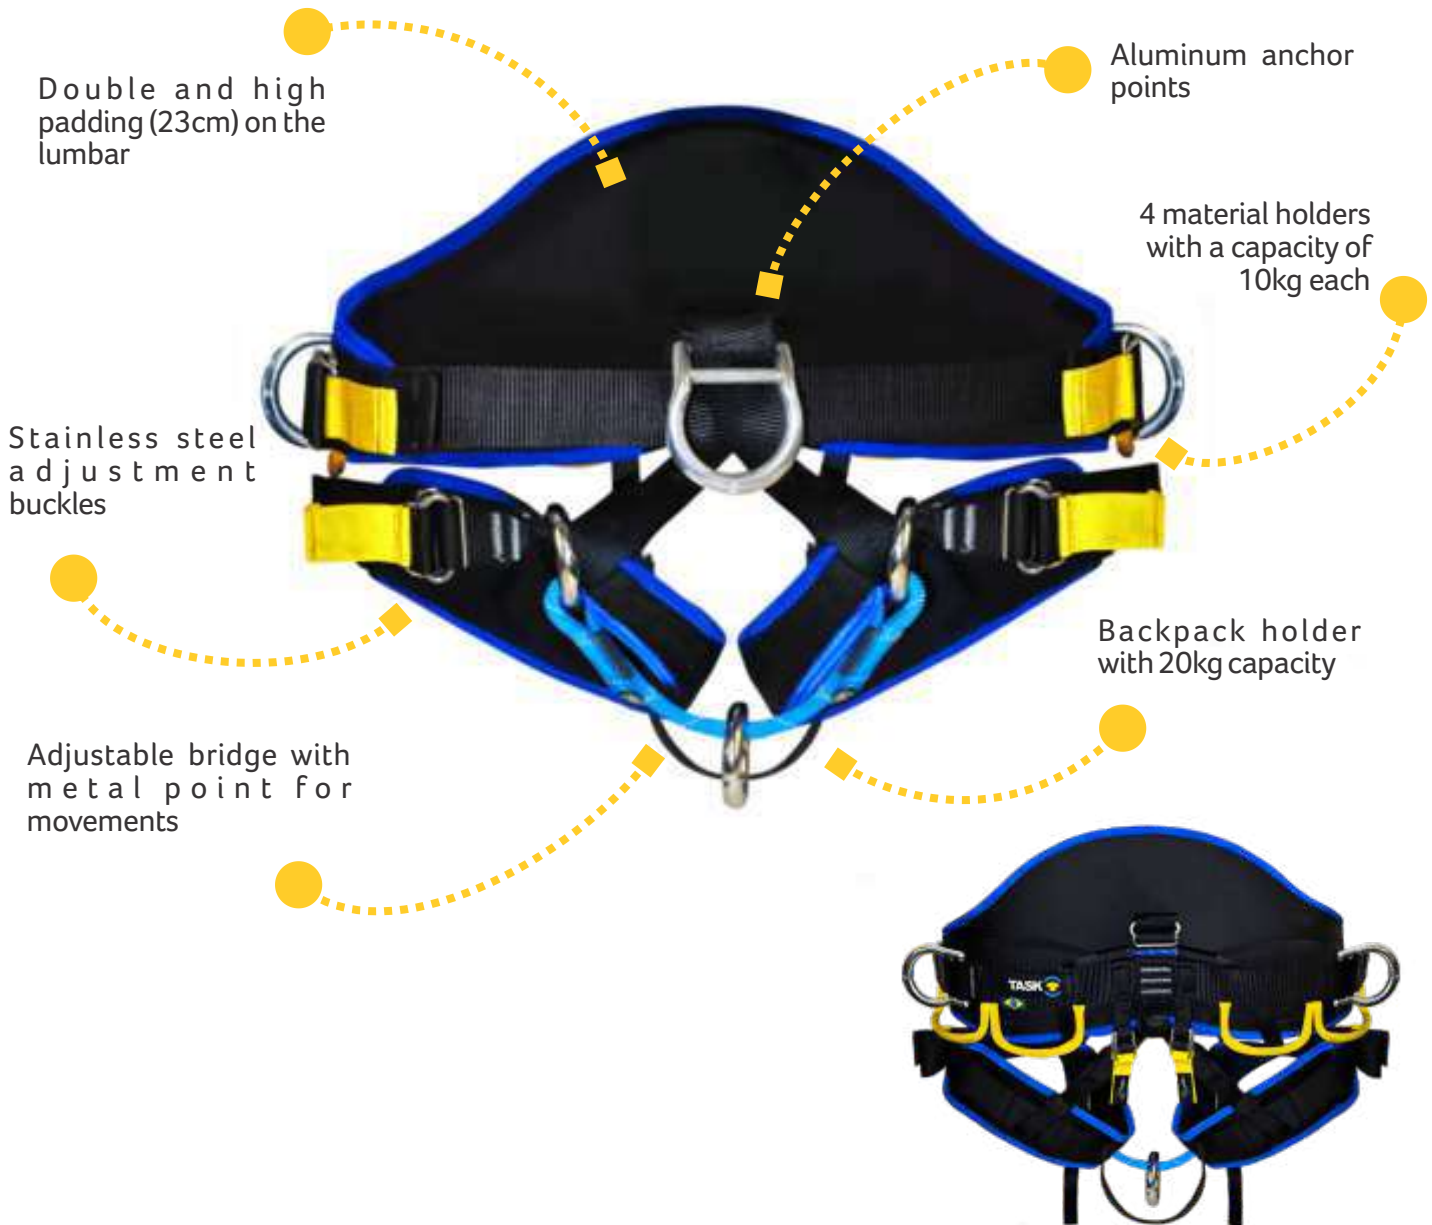

Abdominal harness specially developed for tree climbing operations, with 5 anchor points, extremely light and 100% corrosion resistant, including 1 circular aluminum ring (bridge), 2 metal positioning rings, 1 metal suspension ring and 1 textile movement restriction ring. It has double and high padding, with 23cm in the lumbar region. It was developed to provide a perfect fit between the user and the equipment, ensuring extreme comfort and stabilization of the lumbar region for long-lasting operations. It has an innovative and exclusive AC® system – patented –, double cylindrical bar buckle, with stainless steel angled crown, on both sides. Specially developed for vertical tree operations, as well as technical rescue, rope access, evacuation, positioning, work at height and confined spaces. It has a low center of gravity, ideal for these activities. With 4 structured yellow material holders, with a load capacity of 10kg each.

KITS

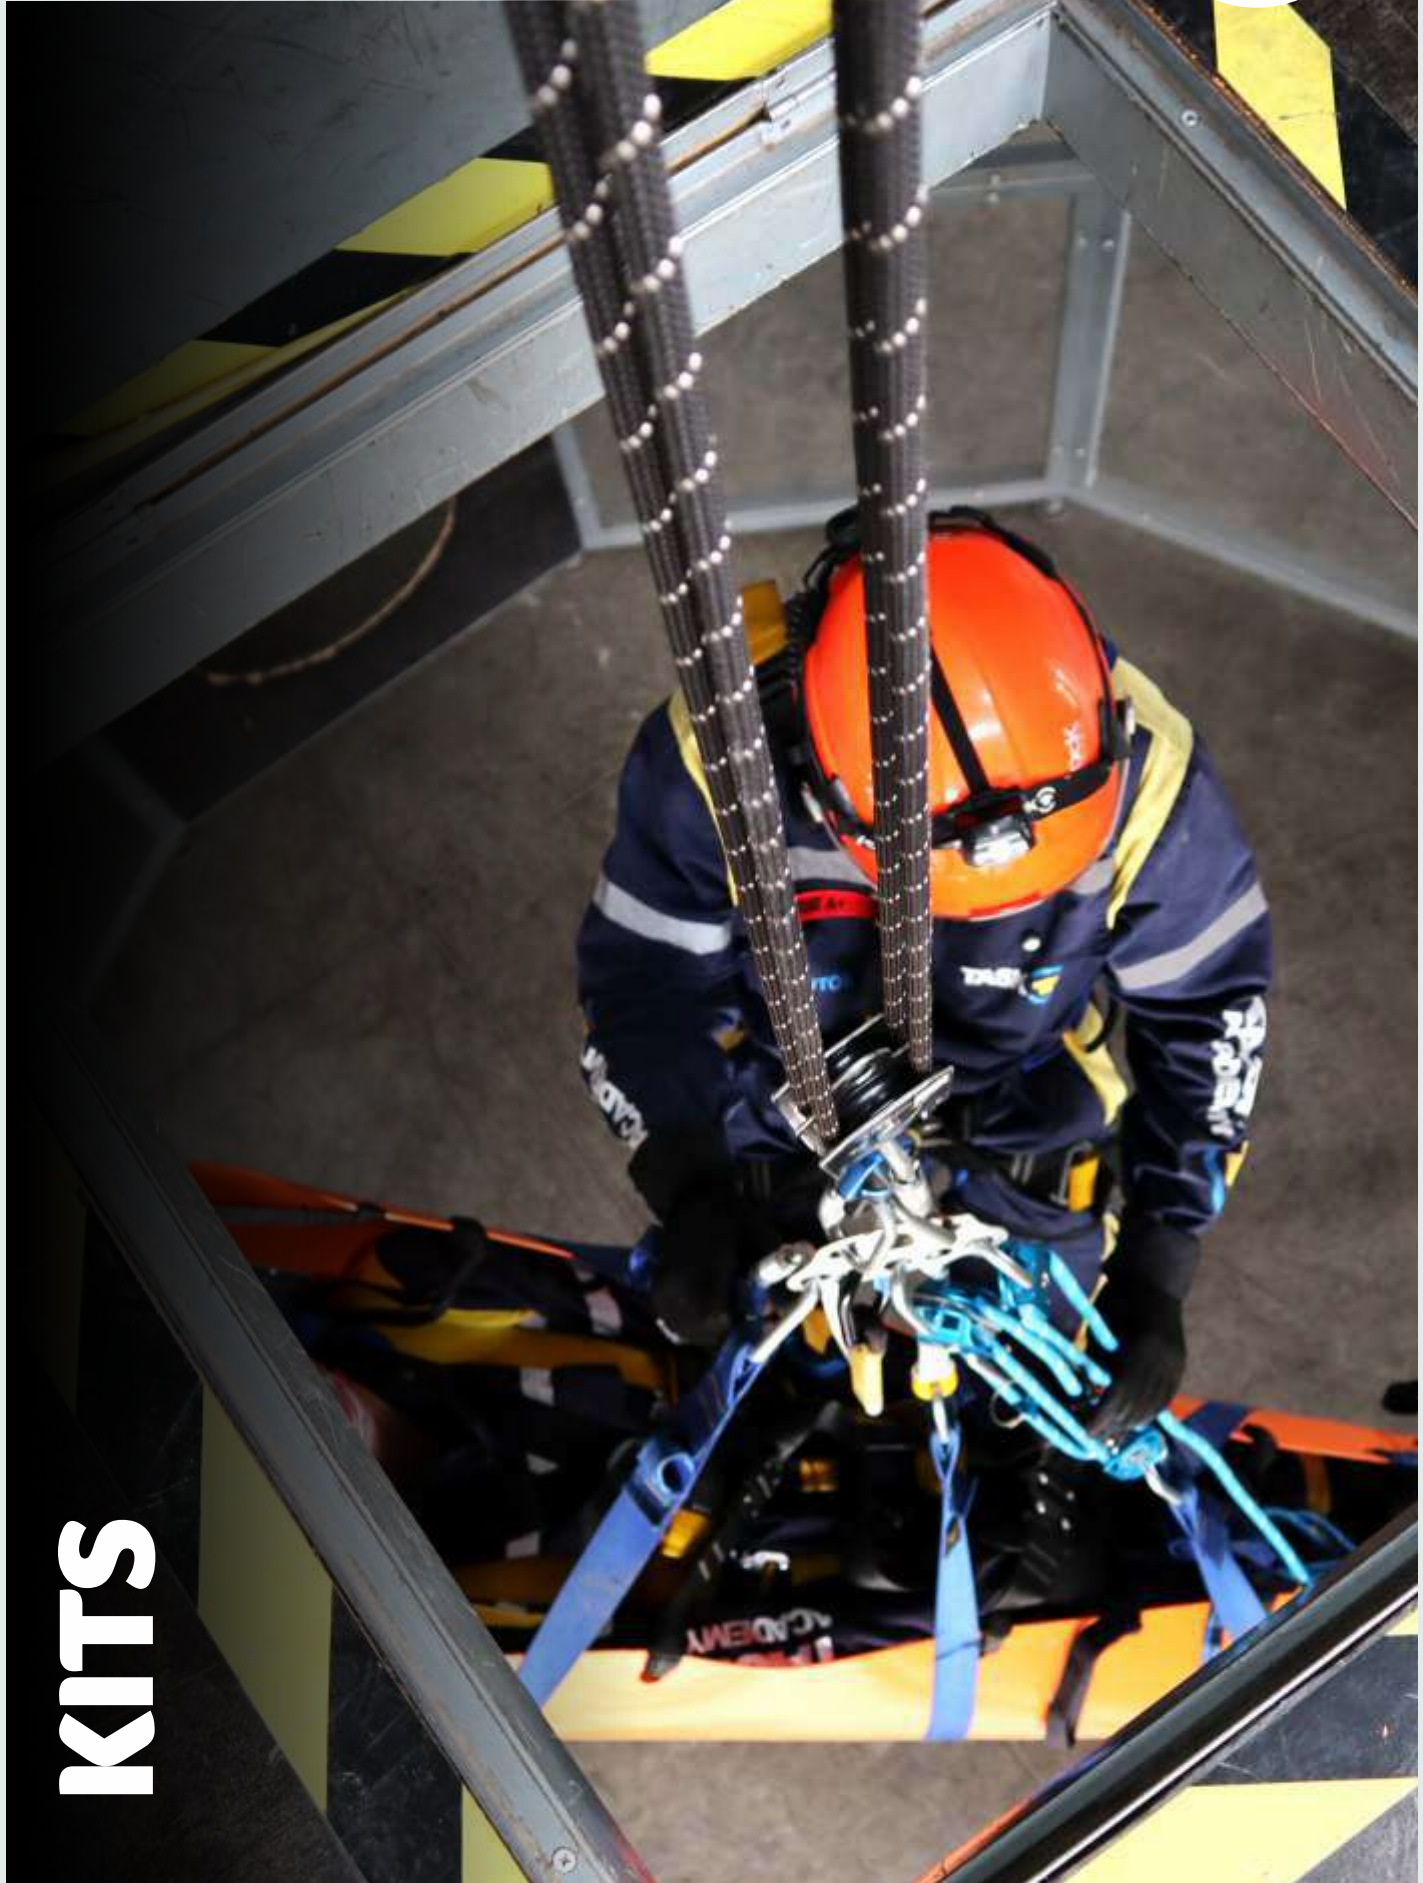

KITS

HARNESSES LANYARDS FALL ARRESTERS ANCHORS CONNECTORS STRETCHERS TRIPODS PRE-ENGINEERING PULLEYS ROPES MANUAL DESCENDERS ASCENDERS AUTOMATIC DESCENDERS BACKPACKS FLASHLIGHTS HELMETS GLOVES ACCESSORIES TREES KITS THE COMPANY TRAINING SERVICES



KIT WORK ON WIND TURBINES KIT-027



The WORK ON WIND TURBINES KIT is ideal for those who work on tall structures, towers, ladders and fixed platforms, and wind turbines. It allows you to reach the work site safely and comfortably.

TC-0144 – IZ TWO ML HARNESS 1
 TL-0008 – FOCUS ELECTRO HELMET 1
 TB-0012 – STEEL CABLE FALL ARREST 1
 TC-0022 – REACTOR LANYARD 55 1
 TC-0024 – SITE POSITIONING LANYARD 1
 TL-0102 – STANK BAG 20 1

KIT WORK ON WIND TURBINES 2 KIT-028



Kit for those who work on tall structures, ladders with lifelines, wind towers, access to the Hub and foundations of wind towers. It allows you to safely reach the work site and position yourself to work.

TC-0147 – IZ FOUR M 1 HARNESS
 TL-0008 – FOCUS ELECTRO HELMET 1
 TB-0012 – STEEL CABLE FALL ARREST 1
 TC-0022 – REACTOR 55 LANYARD 1
 TC-0024 – SITE POSITIONING LANYARD 1
 HB-300 – HAULERBINER RESCUE SYSTEM 300 1
 TL-0102 – STANK BAG 20 1



KIT CONFINED SPACES RESCUE KIT-025



Kit for rescues in confined spaces, where maneuvers will be performed by reducing force. Can reach a depth of 12m. Equipment for use by professional rescuers, civilian or military firefighters.


- TX-0052 – TRIPOD FOR WORKING IN CONFINED SPACE AND AT HEIGHT SUPERWORK 1
- TP-0060 – DOUBLE PRO STAINLESS STEEL PULLEY 1
- TP-0038 – SINGLE PRO STAINLESS STEEL PULLEY 1
- TR-0026A – STATIC ACC ROPE 10.5mm 50m
- TB-0015 – ROPE GRAB II BLOCKER 1
- TX-0006 – STABLE TRIPOD STABILIZATION KIT 1
- TX-0041 – H-STR PLUS II ENVELOPE STRETCHER 1
- TA-0033 – STAINLESS STEEL ANCHOR PLATE 1
- TM-0040 – BULLET Z AUTOMATIC LOCKING STEEL OVAL CARABINER 6
- TA-0058 – DOUBLE LINKEYE TAPE 0.80m 4

KIT CONFINED SPACES RESCUE 2 KIT-026



Kit for rescues in confined spaces, where maneuvers will be performed by reducing force (3:1). It can reach a depth of 48m. Equipment for use by professional rescuers, civilian or military firefighters.

- TX-0052 – TRIPOD FOR WORK IN CONFINED SPACE AND AT HEIGHT SUPERWORK 1
- TP-0065 – DOUBLE LIGHT PULLEY 2
- TP-0063 – SINGLE LIGHT PULLEY 1
- TR-0026D – STATIC ACC ROPE 10.5mm 200m
- TB-0015 – ROPE GRAB II BLOCKER 1
- TX-0048 – STR PLUS II@ STRETCHER 1
- TC-0006 – SUSPENDER II 1
- TX-0006 – STABLE TRIPOD STABILIZATION KIT 1
- TX-0041 – H-STR PLUS II ENVELOPE STRETCHER 1
- TA-0033 – STAINLESS STEEL BEAR PLATE ANCHOR PLATE 1
- TM-0040 – BULLET Z-AUTO – OVAL STEEL CARABINER WITH AUTOMATIC LOCK BULLET Z AUTO 6
- TA-0058 – EYE DOUBLE LINK TAPE 0.80m 8
- TL-0033 – SCAPE STE EVACUATION TASK SYSTEM 1
- TD-0006 – AUTOBLOCK DESCENDER 1
- TL-0104 – INSERT BAG 98 1
- TL-0080 – STANK BAG 37 1
- TA-0022 – SPIN SWIVEL 1
- TL-0075 – TITAN POCKET KNIFE 1
- TR-0035 – CALIBER CORD 5mm 50



KIT RESCUE AT HEIGHT

KIT-023



Kit for rescuers who need to access a victim in a fall arrest system and lower them safely.

TC-0018A – FIVEX II ML HARNESS + QUICK UP 1
 TL-0008 – FOCUS ELECTRO HELMET 1
 TL-0071 – INTENSE HEADLAMP 1
 TM-0031 – BULLET D-AUTO – AUTOMATIC STEEL D CARABINER 1
 TL-0080 – STANK BAG 37 1
 RP-880B – DESCENDER FOR WORK AND RESCUE D4 1
 TB-0020A – LUCK RESCUE 2-PERSON ROPE FALL ARREST 1
 TL-0086 – THOR G LONG GLOVES 1
 TM-0054 – BULLET AUTO ALUMINUM DOUBLE LOCK AUTOMATIC KEYLOCK 6
 TA-0057 – DOUBLE TAPE LINK 0.90m 6
 TB-0001 – HIGHWAY RIGHT HAND WRIST LOCK 1
 TM-0021 – H-MOON 10 1 CARABINER TC-0009 – ACCESS V LANYARD 1
 TB-0009 – FOOTSTEP ROPE CLIMBING PEDAL 1
 TM-0040 – BULLET Z-AUTO – OVAL STEEL CARABINER WITH AUTOMATIC LOCK 6
 TM-0045 – MASTER D SPECIAL 4 CARABINER TC-0013 – ACCESS I LANYARD 1

KIT RESCUE AT HEIGHT 2

KIT-024



Kit for the rescuer who creates his own way of accessing the victim to rescue him from a fall arrest system and lower him safely.

TC-0014A – X-TREME II@ ML + QUICK UP BELT 1
 TL-0110 – ROCK HELMET 1
 TL-0071 – INTENSE FLASHLIGHT 1
 TM-0031 – BULLET D-AUTO – AUTOMATIC STEEL D CARABINER 8
 TA-0057 – DOUBLE LINK STRAP 0.90m 8
 RP-881 – D4 PRO WORK AND RESCUE DESCENDER 1
 TB-0020A – LUCK RESCUE 2-PERSON ROPE FALL ARREST 1
 TL-0086 – THOR G LONG GLOVES 1
 TM-0054 – BULLET AUTO ALUMINUM DOUBLE LOCKING AUTOMATIC KEYLOCK CARABINER 8
 TL-0080 – BAG STANK 37 1
 TB-0001 – HIGHWAY RIGHT HAND WRIST LOCK 1
 TR-0061 – STATIC WORK CE EN NBR UIAA 11.0 MM WHITE (200m)
 TR-0071 – EYE & EYE- EYE SEWN ON THE END OF THE ROPE
 TB-0009 – FOOTSTEP ROPE CLIMBING PEDAL 1
 TM-0045 – MASTER D SPECIAL 4 CARABINER
 TC-0009 – ACCESS V LANYARD 1
 TM-0021 – H-MOON 10 CARABINER 1
 TA-0023 – PROTECTOR ROPE 8
 TL-0032 – CUTT INOX ROPE CUTTING PLIERS 1
 TM-0040 – BULLET Z-AUTO – CARABINER STEEL OVAL WITH AUTOMATIC LOCK 8
 TC-0013 – ACCESS I LANYARD 1



KIT CONFINED SPACES WORKER KIT-021



Kit for authorized workers in confined spaces who need to access, descend or ascend tall structures, such as ladders with steel cable lifelines and towers. It allows you to reach the work site safely and comfortably.

- TC-0029 – X-TREME II® ML HARNESS 1
- TL-0007 – FOCUS WHITE HELMET 1
- TB-0012 – STEEL FALL ARREST 1
- TM-0040 – BULLET Z-AUTO – OVAL STEEL CARABINER WITH AUTOMATIC LOCK 1
- TL-0102 – STANK BAG 20 1
- TC-0022 – REACTOR 55 LANYARD 1
- TB-0020 – LUCK ROPE FALL ARREST 1
- TA-0058 – EYE DOUBLE LINK TAPE 0.80m 1
- TM-0031 – BULLET D-AUTO – AUTOMATIC STEEL D CARABINER 1

KIT CONFINED SPACES SUPERVISOR KIT-022



Kit for confined space supervisors who need to access and inspect confined spaces and release and select the appropriate emergency equipment. It allows you to arrive safely and comfortably at the work site.

- TC-0029 – X-TREME II® ML HARNESS 1
- TC-0022 – REACTOR 55 LANYARD 1
- TL-0071 – INTENSE HEADLAMP 1
- TM-0031 – BULLET D-AUTO – AUTOMATIC STEEL D CARABINER 1
- TC-0006 – SUSPENDER II 1
- TL-0007 – FOCUS WHITE HELMET 1
- TB-0020 – LUCK ROPE FALL ARREST 1
- TA-0059 – EYE DOUBLE LINK TAPE 1.00m BLACK/YELLOW 1
- TM-0054 – BULLET AUTO ALUMINUM DOUBLE LOCK AUTOMATIC KEYLOCK 1
- TL-0033 – SCAPE STE DIAPER – EVACUATION TASK SYSTEM 1
- TL-0080 – STANK BAG 37 1



KIT WORK AT HEIGHT KIT-019



Kit for those who work on tall structures, such as towers, ladders and fixed platforms. Allows you to reach the work site safely and comfortably.

- TC-0107 – FIVEX LIGHT II® ML HARNESS 1
- TC-0022 – REACTOR LANYARD 55 1
- TL-0007 – FOCUS WHITE HELMET 1
- TL-0076 – INSERT BAG 34 1

KIT INDUSTRIAL WORK AT HEIGHT KIT-020



Kit for working on tall structures, such as towers, ladders and fixed platforms. It allows you to reach the work site safely and comfortably.

- Items:
- TC-0018 – FIVEX II® ML 1 HARNESS
 - TL-0007 – FOCUS WHITE HELMET 1
 - TB-0020 – LUCK ROPE FALL ARREST 1
 - TL-0076 – INSERT BAG 34 1
 - TC-0022 – REACTOR LANYARD 55 1
 - TC-0024 – SITE POSITIONING LANYARD 1
 - TB-0012 – STEEL CABLE FALL ARREST 1



KIT ROPE ACCESS FOR ROPE ACCESS

KIT-002



Kit for use by rope access professionals (also called climbers or industrial climbers).

TC-0018 – FIVEX II® HARNESS (ML) 1
 TL-0007 – WHITE FOCUS 1
 TB-0005 – QUICK UP 1
 RP-892B – RED WITH COW'S TAIL 1
 RP-880B – D4 1
 TB-0001 – HIGHWAY (D) 1
 TB-0009 – FOOTSTEP 1
 TM-0054 – ALUMINUM AUTO BULLET DOUBLE LOCK AUTOMATIC KEYLOCK 5
 TM-0019 – TRIANGLE 8 1
 TL-0102 – STANK 20L 1
 TR-0034 – DYNAMIC ACC 9.8mm 10
 TM-0046 – MASTER D-S OPEN 2 26kN

KIT RTVA FOR RESCUERS

KIT-003



Kit for use by professional rescuers, civilian or military firefighters, rescue at heights, where most of the rope progression maneuvers to access the victim and rescue them will be done while descending.

TC-0018 – FIVEX II® HARNESS (ML) 1
 TL-0007 – FOCUS WHITE 1
 RP-881 – D4 PRO 1
 TB-0001 – HIGHWAY (D) 1
 TC-0009 – ACCESS V – 25x65cm – WHITE 1
 TB-0009 – FOOTSTEP 1
 TL-0075 – TITAN 1
 TM-0021 – H-MOON 10mm 1
 TM-0054 – BULLET AUTO ALUMINUM DOUBLE LOCK AUTOMATIC KEYLOCK 1
 TM-0046 – MASTER D-S OPEN 1
 TM-0011 – BULLET Z2
 TL-0102 – STANK BAG 20 L

KIT OARC FOR RESCUERS

KIT-004



Kit for use by professional rescuers, civilian or military firefighters for rescues at heights, where most maneuvers involve progression on a rope to access the victim, in any direction (ascent or descent) and for their rescue.

TC-0018 – FIVEX II® HARNESS (ML) 1
 TL-0007 – WHITE FOCUS 1
 TD-0008 – LOV3 1
 TB-0001 – HIGHWAY (D) 1
 TB-0005 – QUICK UP 1
 TB-0009 – FOOTSTEP 1
 TB-0020 – LUCK 1
 TL-0075 – TITAN 1
 TL-0102 – STANK BAG 20L – BLUE 1
 TC-0010 – ACCESS I – 80cm – BLACK 1
 TC-0009 – ACCESS V – 25x65cm – WHITE 1
 TM-0019 – TRIANGLE 8MM 1
 TM-0021 – H-MOON 10MM 1
 TM-0039 – MASTER D-AUTO – D IN ALUMINUM AUTOMATIC DOUBLE LOCK – 25 kN 1
 TM-0054 – BULLET AUTO ALUMINUM DOUBLE LOCK AUTOMATIC KEYLOCK 1
 TM-0040 – BULLET Z-AUTO – OVAL IN STEEL WITH AUTOMATIC LOCK – 25 kN 4
 TM-0046 – MASTER D-S OPEN 2



KIT STEF KIT-008



- 6m STATIC STITCHED EYE TASK 10.5mm
- 2 DOUBLE LIGHTS
- 1 SINGLE LIGHT
- 1 FIXED ROPE GRAB II
- 5 BULLETZ AUTO

KIT PPE INSPECTION KIT-014



- 1 storage bag
- 1 metal stick to maneuver the labels (2mm)
- 1 pen for proper marking of equipment
- 1 machine to cut and seal ropes (220w)
- 1 gas welder
- 1 caliper
- 1 magnifying glass
- 1 PERSONAL headlamp (400ml)
- 1 silicone-based lubricant (400ml)
- 1 rope marker

KIT STEF KIT-008



- KIT-029 - MRG9 EASY RESCUE KIT 15 METERS
- KIT-030 - MRG9 EASY RESCUE KIT 30 METERS
- KIT-031 - MRG9 EASY RESCUE KIT 50 METERS
- KIT-032 - MRG9 EASY RESCUE KIT 80 METERS
- KIT-033 - MRG9 EASY RESCUE KIT 100 METERS
- KIT-034 - MRG9 EASY RESCUE KIT 120 METERS
- KIT-035 - MRG9 EASY RESCUE KIT 160 METERS

Items that make up the kit:

- MRG9 EASY AUTOMATIC DESCENDER HANDWHEEL FOR ELEVATION - 160 meters, 2 people, selector switch, descent 0.8M/S – EN 341:2011 (1A/1B) | EN 1496:2017/B | EN 1891 TYPE A - (1 piece)
 - TA-0051 I-SLING ANCHOR STRAP - 1.00m – 134g (blue) - (1 piece)
 - TM-0040 OVAL STEEL DOUBLE LOCKING CARABINER 25KN KEYLOCK CE EN NBR – BULLETZ AUTO (1 piece)
 - TB-0015 ROPE GRAB II BLOCKER (1 piece)
 - TP-0063 ALUMINUM SINGLE PULLEY 36KN CE EN - SINGLE LIGHT PULLEY - BLUE (1 piece)
 - BACKPACK FOR TRANSPORTING ROPES AND EQUIPMENT (1 piece)
- The 15 to 50 meter rope kit comes with a 20 liter backpack. The 80 to 160 meter rope kit comes with a 37 liter backpack.

ABOUT



ABOUT

HARNESSES LANYARDS FALL ARRESTER ANCHORS CONNECTORS STRETCHERS TRIPPODS PRE-ENGINEERING PULLEYS ROPES MANUAL DESCENDERS ASCENDERS AUTOMATIC DESCENDERS BACKPACKS FLASHLIGHTS HELMETS GLOVES ACCESSORIES TREES KITS THE COMPANY TRAINING SERVICES



Nice to meet you, we are TASK!

The company's origins come from the passion for extreme sports of its founder, Ricardo Perez. A standout in the elite category of BMX, which is the most competitive, he was a five-time Pan American champion, five-time South American champion and three-time Brazilian champion. He was also the third best in the world.

His connection with sports continued with speleology (cave exploration), from which he sought knowledge and inspiration for the national and international market. Much of the equipment and techniques used in the industry have their origins in speleology and serve as inspiration for Ricardo.

This trajectory defined the company's DNA: dynamic, fast and always seeking to be ahead, bringing the highest quality in products with purpose and potential, seeking to generate wealth for all involved.

ISO 9001

We have an integrated Quality Management System, which intensifies our quality control in the production of the equipment in the scope, in accordance with the ABNT ISO 9001 standard.

RESEARCH AND DEVELOPMENT

The process of creating new products goes through several stages of development, where ideas are collected, designed and analyzed to achieve the expected result: functional, innovative and high-quality equipment.

QUALITY CONTROL

From the first stage of production, the raw materials are inspected one by one by those responsible. The finished products also undergo a final quality control to ensure that nothing is out of specification.

HIGH TECHNOLOGY

All of our seams are electronic, made by ultra-modern machines. This prevents errors and ensures that all seams come out with the desired standard. Each piece of equipment has a template and a specialist machine operator for its proper production.





VISIT THE WEBSITE



TRAININGS



The concept behind the name ACADEMY is the constant search for excellence, which is always present in the training courses held at the “TASK academy”. The idea is for students to feel like they are in an environment that is conducive to enhancing their learning and guided by instructors with extensive experience, like true coaches, in addition to using the best equipment available on the world market.

All the structures and every detail of the environments were designed to intensify immersion and provide pleasure during the learning process. TASK's experience of over 25 years developing technical training can be seen in every detail!

Internationally Award Winning Training Center

At the GWO Safety & Training Awards, which took place in November 2021, TASK was recognized in four Training Team of the Year categories: Americas (units in Rio Grande do Norte and São Paulo), Newcomer and +1500 WINDA Uploads!

The event was held during Wind Europe Electric City 2021, the largest wind energy fair in the world, in Copenhagen, Denmark. The company was also awarded Highly Commended – Americas.

The Safety & Training Awards recognize the quality of TASK's Training Centers for safety in working at heights, which serve renewable energy companies generated by wind.

The award consecrates TASK as one of the largest in the world and in the Americas!

These are some of the differences that TASK has in its training centers:

- Indoor and outdoor wind simulators
- Classrooms equipped with air conditioning and multimedia equipment
- Headquarters unit close to the main commercial establishments (restaurants, bakeries, markets, hotels, inns and pharmacies)

In our team of instructors, we have professionals with extensive experience, such as:

- Safety technicians
- Civil and electrical engineers
- Instructors certified by GWO (Global Wind Organisation)
- Civilian and military firefighters
- Rescuers trained by the COLLEGE System

Our units are waiting for you to visit. Come and meet us!

TASK São Paulo


Avenida Rogério Cassola, 896
18116-709 – Votorantim, SP - Brasil

TASK Rio Grande do Norte

R. Monsenhor Walfredo Gurgel
59148-430 – Parnamirim, RN - Brasil

TASK Petrolina

Av. Sete de Setembro, 710
56300-000 – Petrolina, PE - Brasil

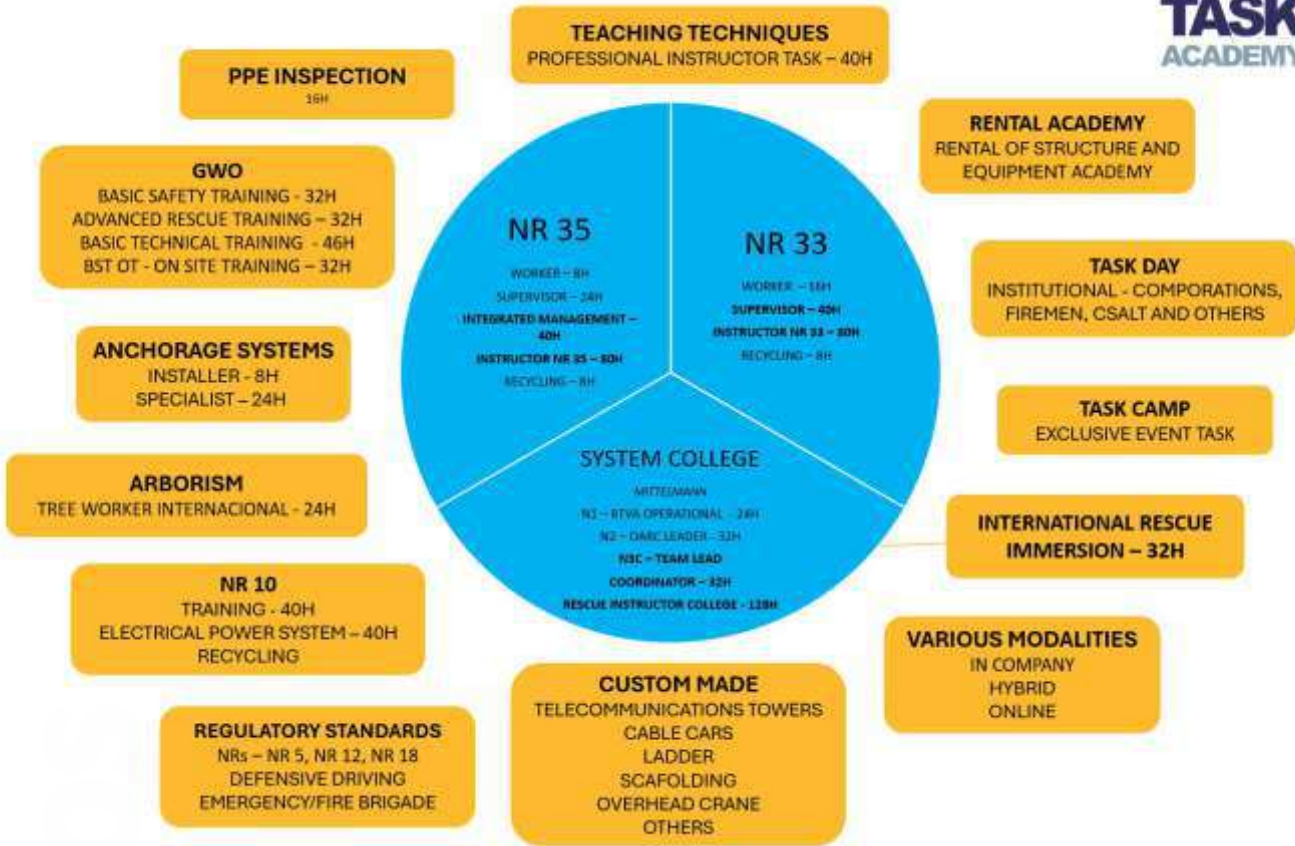




SERVICES



We are a national reference in the installation of Fall Protection Systems, through projects prepared by civil engineers specialized in the area and the execution conducted by our own team of highly qualified technicians and rescuers, using a wide range of equipment manufactured in-house, ensuring that the installations are in full compliance with current laws and regulations.

With over 25 years of experience, we have accumulated experience in large projects, carried out in companies throughout Brazil. Our commitment is to offer customized solutions, adjusted to the specific needs of the client, with team support throughout the process.

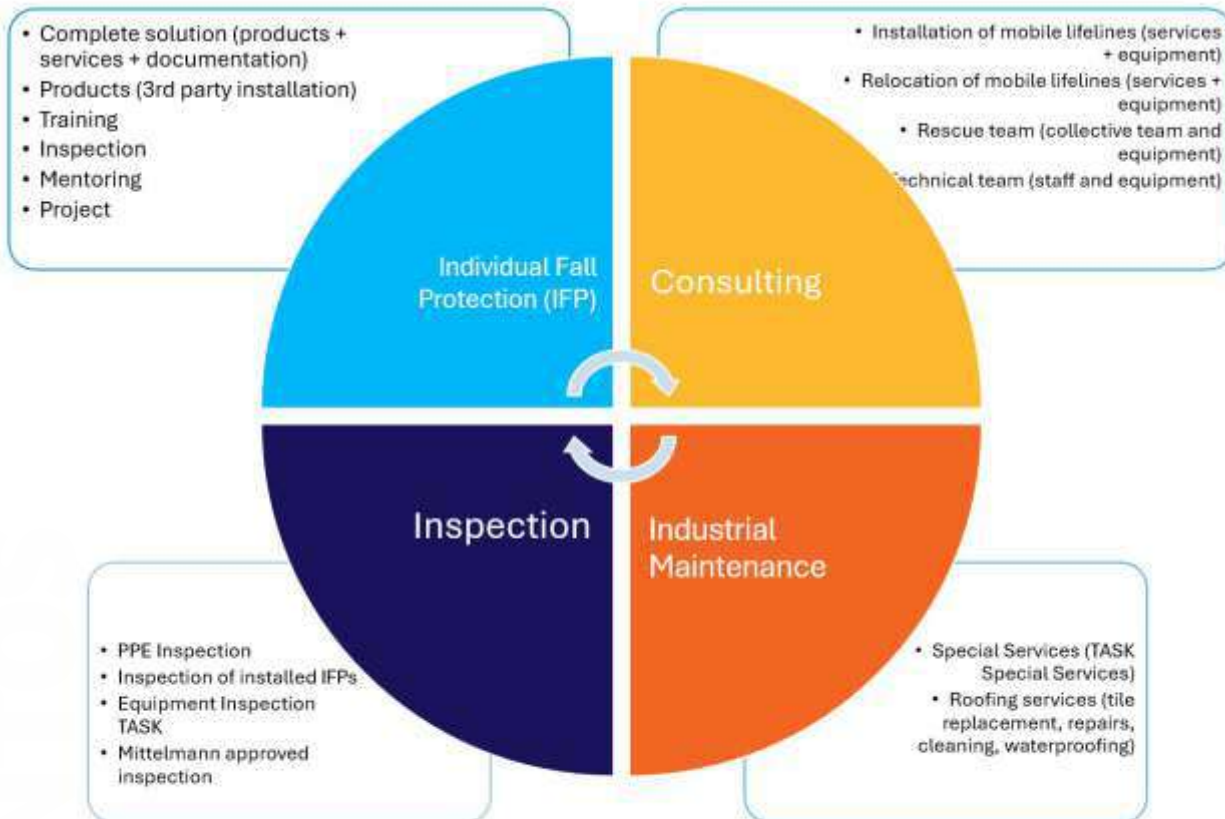

Our clients

